

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P585194

Luminaire Tested: **HCC8S80D010MB-HM86080827-81RWWC**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P585194  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-14)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCC8S80D010MB-HM86080827-81RWWC  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WALLWASH DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT  
CYLINDER  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5930.5 lumens  
Efficiency: N/A  
Efficacy: 84.7 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.08 / 1.17  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 70  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P585194  
CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

### Luminous Intensity Polar Plot

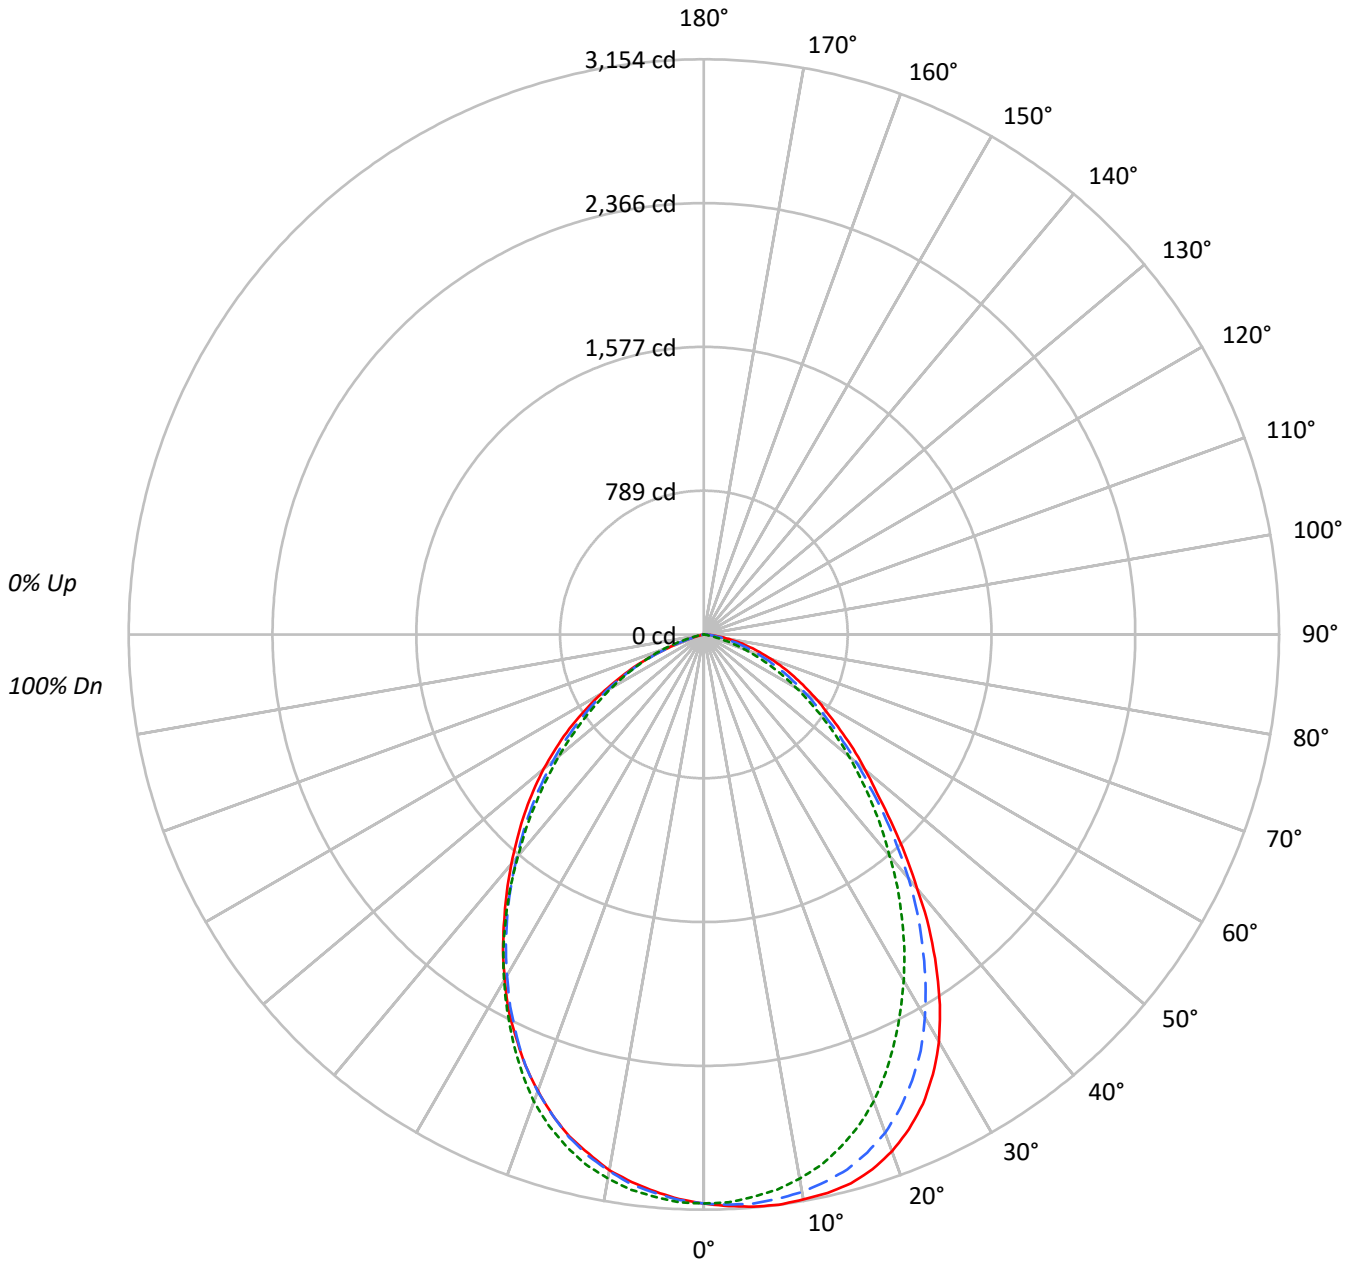



TEST NUMBER: P585194

CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0					
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100								
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88								
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	85	82	79	77								
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67								
4	88	77	70	64	86	76	69	64	74	68	63	72	66	62	69	65	61	59								
5	81	70	62	56	80	69	62	56	67	61	56	65	59	55	63	58	54	52								
6	76	64	56	50	74	63	55	50	61	55	50	60	54	49	58	53	49	47								
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42								
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38								
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35								
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32								

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	96222	96222	96222
5°	97490	95815	94911
10°	98489	94835	93404
15°	99485	92832	90971
20°	98981	89409	87361
25°	96669	84057	82920
30°	91823	78025	77729
35°	83589	71196	71829
40°	73286	63730	66073
45°	63220	56683	60682
50°	55361	49767	54962
55°	49047	42778	48375
60°	44195	35967	40081
65°	39824	28880	30704
70°	34937	21034	16905
75°	29774	10925	4468
80°	22925	2948	746
85°	14718	0	0



TEST NUMBER: P585194  
 CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	294.4	5.0
10°-20°	827.6	14.0
20°-30°	1174.7	19.8
30°-40°	1236.5	20.9
40°-50°	1051.9	17.7
50°-60°	760.2	12.8
60°-70°	432.4	7.3
70°-80°	136.2	2.3
80°-90°	16.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2296.7	38.7
0°-40°	3533.3	59.6
0°-60°	5345.4	90.1
0°-90°	5930.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5930.5	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	3120	3120	3120	3120	3120	
5°	3150	3133	3095	3074	3066	300
15°	3116	3037	2908	2854	2850	878
25°	2841	2700	2470	2429	2437	1301
35°	2220	2091	1891	1879	1908	1382
45°	1450	1396	1300	1333	1392	1127
55°	912	846	796	842	900	823
65°	546	471	396	392	421	541
75°	250	192	92	42	38	269
85°	42	25	0	0	0	54
90°	0	0	0	0	0	

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P585194

CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4
2.5°	3137.1	3141.2	3132.9	3132.9	3141.2	3132.9	3137.1	3137.1	3132.9	3132.9	3128.7
5°	3149.5	3145.4	3145.4	3145.4	3149.5	3141.2	3137.1	3141.2	3132.9	3132.9	3132.9
7.5°	3153.7	3153.7	3149.5	3145.4	3145.4	3145.4	3141.2	3137.1	3132.9	3124.6	3120.4
10°	3145.4	3145.4	3149.5	3141.2	3141.2	3132.9	3132.9	3124.6	3124.6	3116.3	3103.8
12.5°	3137.1	3132.9	3132.9	3124.6	3124.6	3116.3	3116.3	3103.8	3099.6	3087.0	3074.5
15°	3116.3	3112.1	3103.8	3099.6	3095.4	3091.3	3082.8	3078.7	3066.2	3049.5	3037.1
17.5°	3074.5	3070.4	3066.2	3057.9	3049.5	3045.4	3041.2	3028.7	3012.1	2999.6	2978.7
20°	3016.3	3012.1	3012.1	2999.6	2995.4	2983.0	2978.7	2962.0	2949.6	2924.6	2907.9
22.5°	2937.1	2941.2	2932.9	2924.6	2916.3	2903.8	2895.5	2878.8	2857.9	2832.9	2812.1
25°	2841.2	2845.4	2837.1	2828.7	2816.3	2807.9	2799.6	2774.7	2753.7	2724.6	2699.6
27.5°	2720.4	2720.4	2720.4	2712.1	2691.3	2687.1	2678.8	2653.7	2624.6	2599.6	2574.7
30°	2578.8	2574.7	2574.7	2562.2	2553.9	2537.1	2524.6	2503.8	2483.0	2453.9	2424.6
32.5°	2408.0	2412.1	2399.6	2391.3	2378.8	2378.8	2362.2	2345.5	2320.5	2291.3	2262.2
35°	2220.5	2224.7	2216.3	2212.1	2191.3	2187.2	2183.0	2162.2	2145.6	2124.7	2091.3
37.5°	2028.9	2024.7	2020.6	2020.6	2008.1	1999.7	1991.3	1978.9	1953.9	1937.2	1920.6
40°	1820.6	1820.6	1820.6	1816.4	1812.3	1804.0	1799.8	1791.5	1774.7	1758.1	1745.6
42.5°	1633.1	1633.1	1628.9	1624.8	1616.4	1620.6	1612.3	1604.0	1587.3	1574.8	1566.4
45°	1449.7	1449.7	1449.7	1453.9	1445.6	1433.1	1433.1	1424.8	1416.5	1408.1	1395.6
47.5°	1287.3	1299.8	1291.5	1287.3	1291.5	1274.8	1274.8	1266.5	1258.2	1249.9	1233.1
50°	1154.0	1154.0	1154.0	1145.7	1141.6	1141.6	1129.0	1120.6	1116.5	1108.1	1091.5
52.5°	1033.2	1024.8	1024.8	1020.6	1016.5	1008.2	1008.2	999.8	983.2	974.9	962.4
55°	912.3	912.3	908.2	904.0	899.8	895.7	891.5	879.0	870.7	858.2	845.7
57.5°	804.0	812.3	808.2	799.8	791.5	791.5	783.2	774.9	762.4	749.9	737.4
60°	716.6	712.4	712.4	708.3	699.8	695.7	691.5	679.0	666.6	654.1	641.6
62.5°	624.9	624.9	624.9	616.6	608.3	604.1	600.0	591.5	574.9	562.4	554.1
65°	545.8	541.6	537.4	533.3	529.1	520.8	516.6	508.3	495.8	483.2	470.7
67.5°	466.6	462.4	462.4	458.2	445.8	441.6	441.6	429.1	416.6	404.1	391.7
70°	387.5	387.5	387.5	379.1	374.9	370.7	366.6	358.2	345.8	333.3	320.8
72.5°	320.8	316.6	316.6	312.5	300.0	295.8	291.7	283.3	270.7	262.4	254.1
75°	249.9	249.9	245.8	241.6	237.4	233.3	229.1	220.8	208.3	195.8	191.7
77.5°	191.7	187.5	187.5	183.3	175.0	170.9	170.9	162.4	149.9	141.6	133.3
80°	129.1	133.3	129.1	125.0	120.8	116.6	112.5	108.3	100.0	91.7	83.3
82.5°	79.2	83.3	79.2	79.2	75.0	70.9	70.9	62.5	58.4	54.1	49.9
85°	41.6	41.6	41.6	41.6	37.5	37.5	37.5	33.3	29.1	25.0	25.0
87.5°	12.5	16.6	12.5	12.5	12.5	12.5	12.5	12.5	8.3	8.3	8.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P585194

CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4
2.5°	3132.9	3128.7	3124.6	3124.6	3124.6	3124.6	3124.6	3120.4	3116.3	3116.3	3116.3
5°	3124.6	3124.6	3124.6	3120.4	3116.3	3116.3	3107.9	3103.8	3099.6	3095.4	3091.3
7.5°	3116.3	3107.9	3103.8	3099.6	3095.4	3095.4	3087.0	3078.7	3078.7	3070.4	3062.0
10°	3091.3	3087.0	3078.7	3070.4	3066.2	3062.0	3053.7	3041.2	3037.1	3028.7	3020.4
12.5°	3062.0	3053.7	3045.4	3028.7	3024.6	3020.4	3003.8	2991.3	2983.0	2978.7	2957.9
15°	3024.6	3007.9	2995.4	2974.5	2970.4	2962.0	2949.6	2937.1	2920.4	2907.9	2899.6
17.5°	2957.9	2941.2	2920.4	2899.6	2891.3	2891.3	2870.4	2853.7	2832.9	2824.6	2807.9
20°	2878.8	2857.9	2841.2	2816.3	2803.8	2791.3	2778.8	2753.7	2737.1	2724.6	2703.8
22.5°	2787.1	2757.9	2737.1	2712.1	2691.3	2678.8	2658.0	2637.1	2616.3	2603.8	2587.1
25°	2670.5	2645.4	2612.1	2587.1	2574.7	2558.0	2532.9	2512.1	2491.3	2470.5	2462.2
27.5°	2541.2	2508.0	2478.8	2449.7	2437.1	2424.6	2395.5	2370.5	2353.9	2333.1	2324.6
30°	2399.6	2366.3	2333.1	2308.0	2295.5	2274.7	2258.0	2228.9	2208.0	2191.3	2170.5
32.5°	2237.2	2212.1	2183.0	2145.6	2137.2	2120.6	2095.5	2083.0	2058.0	2045.6	2028.9
35°	2062.2	2045.6	2016.4	1987.2	1974.7	1966.4	1945.6	1920.6	1903.9	1891.3	1883.0
37.5°	1895.5	1874.7	1845.6	1824.8	1816.4	1804.0	1778.9	1766.4	1749.7	1741.4	1724.8
40°	1716.4	1695.6	1674.7	1662.2	1649.7	1641.4	1624.8	1612.3	1595.6	1583.2	1579.0
42.5°	1541.4	1528.9	1512.3	1495.6	1491.5	1479.0	1470.7	1458.1	1445.6	1441.4	1428.9
45°	1383.2	1370.7	1353.9	1337.3	1333.1	1324.8	1320.6	1308.1	1299.8	1299.8	1299.8
47.5°	1224.8	1212.3	1195.7	1187.3	1191.5	1174.9	1174.9	1170.7	1162.4	1162.4	1166.5
50°	1083.2	1066.5	1062.4	1054.0	1045.7	1037.4	1041.6	1029.0	1029.0	1037.4	1033.2
52.5°	949.9	933.2	929.1	920.6	916.5	916.5	912.3	912.3	908.2	912.3	912.3
55°	829.1	816.6	808.2	799.8	795.7	795.7	795.7	791.5	787.4	795.7	799.8
57.5°	720.8	716.6	708.3	695.7	691.5	687.4	683.2	683.2	683.2	683.2	687.4
60°	624.9	616.6	608.3	595.7	595.7	591.5	587.4	583.2	583.2	583.2	583.2
62.5°	541.6	529.1	516.6	508.3	504.1	500.0	495.8	487.4	487.4	487.4	487.4
65°	458.2	445.8	437.4	429.1	420.8	420.8	412.5	408.3	400.0	395.8	387.5
67.5°	379.1	370.7	362.4	349.9	345.8	341.6	333.3	329.1	316.6	312.5	308.3
70°	308.3	295.8	287.5	279.2	275.0	266.6	258.3	249.9	241.6	233.3	225.0
72.5°	241.6	229.1	220.8	212.5	204.2	204.2	191.7	183.3	170.9	162.4	149.9
75°	179.2	166.7	158.3	145.8	141.6	137.4	125.0	116.6	104.2	91.7	83.3
77.5°	120.8	112.5	104.2	91.7	83.3	83.3	70.9	62.5	54.1	41.6	37.5
80°	75.0	66.7	58.4	49.9	49.9	41.6	37.5	29.1	20.8	16.6	12.5
82.5°	41.6	37.5	33.3	25.0	25.0	20.8	16.6	12.5	8.3	4.2	4.2
85°	20.8	16.6	12.5	12.5	8.3	8.3	8.3	4.2	4.2	0.0	0.0
87.5°	8.3	4.2	4.2	4.2	4.2	4.2	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P585194

CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

**CANDELA DISTRIBUTION (continued):**

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4
2.5°	3112.1	3112.1	3107.9	3107.9	3107.9	3103.8	3107.9	3103.8	3103.8	3103.8	3107.9
5°	3095.4	3087.0	3087.0	3082.8	3082.8	3078.7	3082.8	3078.7	3074.5	3070.4	3074.5
7.5°	3062.0	3053.7	3049.5	3045.4	3045.4	3045.4	3041.2	3037.1	3041.2	3028.7	3037.1
10°	3016.3	3012.1	3003.8	2999.6	2995.4	2999.6	2995.4	2987.1	2987.1	2987.1	2983.0
12.5°	2957.9	2949.6	2945.4	2941.2	2932.9	2932.9	2937.1	2928.7	2928.7	2920.4	2920.4
15°	2887.1	2878.8	2870.4	2870.4	2862.0	2862.0	2857.9	2857.9	2853.7	2849.6	2849.6
17.5°	2799.6	2787.1	2778.8	2783.0	2778.8	2774.7	2774.7	2766.3	2762.0	2766.3	2766.3
20°	2695.5	2687.1	2678.8	2683.0	2674.7	2670.5	2674.7	2662.2	2666.3	2666.3	2666.3
22.5°	2578.8	2574.7	2562.2	2562.2	2553.9	2549.7	2553.9	2553.9	2558.0	2553.9	2553.9
25°	2449.7	2441.4	2432.9	2432.9	2428.8	2424.6	2428.8	2432.9	2428.8	2432.9	2432.9
27.5°	2312.1	2299.6	2299.6	2291.3	2291.3	2295.5	2291.3	2295.5	2299.6	2299.6	2308.0
30°	2162.2	2158.0	2153.9	2149.7	2149.7	2153.9	2153.9	2153.9	2158.0	2166.4	2166.4
32.5°	2020.6	2012.3	2003.8	2003.8	2012.3	2008.1	2012.3	2012.3	2020.6	2020.6	2028.9
35°	1866.4	1866.4	1858.1	1862.2	1862.2	1862.2	1862.2	1870.5	1878.9	1883.0	1891.3
37.5°	1724.8	1712.3	1716.4	1716.4	1720.6	1716.4	1728.9	1728.9	1737.2	1737.2	1745.6
40°	1570.6	1570.6	1574.8	1570.6	1574.8	1574.8	1583.2	1591.5	1595.6	1604.0	1608.1
42.5°	1424.8	1433.1	1424.8	1428.9	1433.1	1437.3	1441.4	1445.6	1462.2	1470.7	1483.2
45°	1291.5	1295.7	1299.8	1304.0	1299.8	1308.1	1312.3	1320.6	1333.1	1337.3	1341.4
47.5°	1162.4	1166.5	1170.7	1174.9	1174.9	1183.2	1187.3	1195.7	1204.0	1208.1	1212.3
50°	1037.4	1045.7	1049.9	1049.9	1054.0	1062.4	1070.7	1070.7	1079.0	1091.5	1095.7
52.5°	924.9	924.9	933.2	937.4	941.6	941.6	954.1	958.2	962.4	970.7	979.0
55°	799.8	812.3	816.6	816.6	824.9	833.3	837.4	841.6	841.6	858.2	858.2
57.5°	691.5	695.7	704.0	704.0	704.0	716.6	716.6	724.9	729.1	733.3	741.6
60°	583.2	591.5	591.5	595.7	591.5	600.0	604.1	612.5	616.6	620.8	624.9
62.5°	483.2	483.2	487.4	487.4	487.4	487.4	495.8	495.8	504.1	508.3	512.5
65°	387.5	387.5	387.5	387.5	387.5	387.5	387.5	387.5	391.7	391.7	400.0
67.5°	300.0	295.8	287.5	291.7	287.5	287.5	283.3	283.3	287.5	287.5	295.8
70°	216.6	212.5	204.2	204.2	200.0	195.8	191.7	187.5	183.3	183.3	183.3
72.5°	141.6	133.3	120.8	116.6	116.6	108.3	100.0	95.8	95.8	95.8	95.8
75°	70.9	62.5	54.1	49.9	49.9	41.6	45.8	41.6	41.6	41.6	41.6
77.5°	29.1	20.8	16.6	16.6	16.6	12.5	12.5	12.5	12.5	12.5	12.5
80°	8.3	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
82.5°	4.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



Cooper Lighting Solutions Photometric Lab  
 1121 Highway 74 South  
 Peachtree City, GA 30269



TEST NUMBER: P585194

CATALOG NUMBER: HCC8S80D010MB-HM86080827-81RWWC

**CANDELA DISTRIBUTION (continued):**

	150°	155°	157.5°	160°	165°	170°	175°	180°
0°	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4	3120.4
2.5°	3103.8	3103.8	3095.4	3099.6	3099.6	3099.6	3099.6	3099.6
5°	3066.2	3070.4	3066.2	3070.4	3070.4	3066.2	3066.2	3066.2
7.5°	3028.7	3032.9	3028.7	3032.9	3032.9	3032.9	3028.7	3028.7
10°	2983.0	2983.0	2983.0	2983.0	2983.0	2978.7	2983.0	2983.0
12.5°	2920.4	2920.4	2920.4	2924.6	2924.6	2920.4	2920.4	2916.3
15°	2853.7	2845.4	2849.6	2853.7	2849.6	2849.6	2849.6	2849.6
17.5°	2762.0	2766.3	2762.0	2762.0	2762.0	2762.0	2766.3	2762.0
20°	2666.3	2666.3	2670.5	2666.3	2666.3	2666.3	2666.3	2662.2
22.5°	2558.0	2553.9	2553.9	2558.0	2558.0	2553.9	2558.0	2558.0
25°	2437.1	2441.4	2437.1	2437.1	2441.4	2441.4	2441.4	2437.1
27.5°	2308.0	2312.1	2316.3	2312.1	2312.1	2312.1	2316.3	2320.5
30°	2174.7	2183.0	2174.7	2174.7	2183.0	2178.8	2183.0	2183.0
32.5°	2033.1	2045.6	2037.2	2045.6	2045.6	2049.7	2045.6	2049.7
35°	1891.3	1903.9	1903.9	1903.9	1908.1	1912.3	1912.3	1908.1
37.5°	1758.1	1762.2	1762.2	1770.5	1774.7	1778.9	1778.9	1774.7
40°	1620.6	1628.9	1633.1	1633.1	1633.1	1641.4	1649.7	1641.4
42.5°	1487.3	1491.5	1495.6	1495.6	1504.0	1508.1	1512.3	1512.3
45°	1358.2	1366.5	1370.7	1374.8	1379.0	1387.3	1383.2	1391.5
47.5°	1224.8	1237.3	1241.4	1245.6	1254.0	1258.2	1262.4	1266.5
50°	1104.0	1112.3	1112.3	1120.6	1133.1	1133.1	1141.6	1145.7
52.5°	983.2	987.3	991.5	995.7	1004.0	1012.3	1012.3	1020.6
55°	866.5	870.7	870.7	874.9	879.0	895.7	899.8	899.8
57.5°	745.7	745.7	754.1	758.2	762.4	770.7	770.7	770.7
60°	629.1	633.3	633.3	637.4	641.6	649.9	654.1	649.9
62.5°	512.5	516.6	516.6	520.8	529.1	533.3	529.1	529.1
65°	404.1	408.3	408.3	412.5	420.8	420.8	416.6	420.8
67.5°	295.8	295.8	295.8	295.8	295.8	295.8	295.8	295.8
70°	187.5	183.3	179.2	183.3	183.3	183.3	179.2	187.5
72.5°	91.7	95.8	95.8	95.8	95.8	95.8	95.8	91.7
75°	41.6	41.6	37.5	37.5	37.5	41.6	41.6	37.5
77.5°	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
80°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°    - - 45°-225°    - - - - 90°-270°

Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Classified  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)