

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P434697

Luminaire Tested: **HCM4R25940ED010MW**

Issue Date: 11/24/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P434697  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-933-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 11/24/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HCM4R25940ED010MW  
Description: HALO COMMERCIAL 4INCH ADJUSTABLE MULTIPLE, 25 DEG REFLECTOR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5121.8 lumens  
Efficiency: N/A  
Efficacy: 94.7 lumens/watt  
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.39  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 54.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P434697

CATALOG NUMBER: HCM4R25940ED010MW

### Luminous Intensity Polar Plot

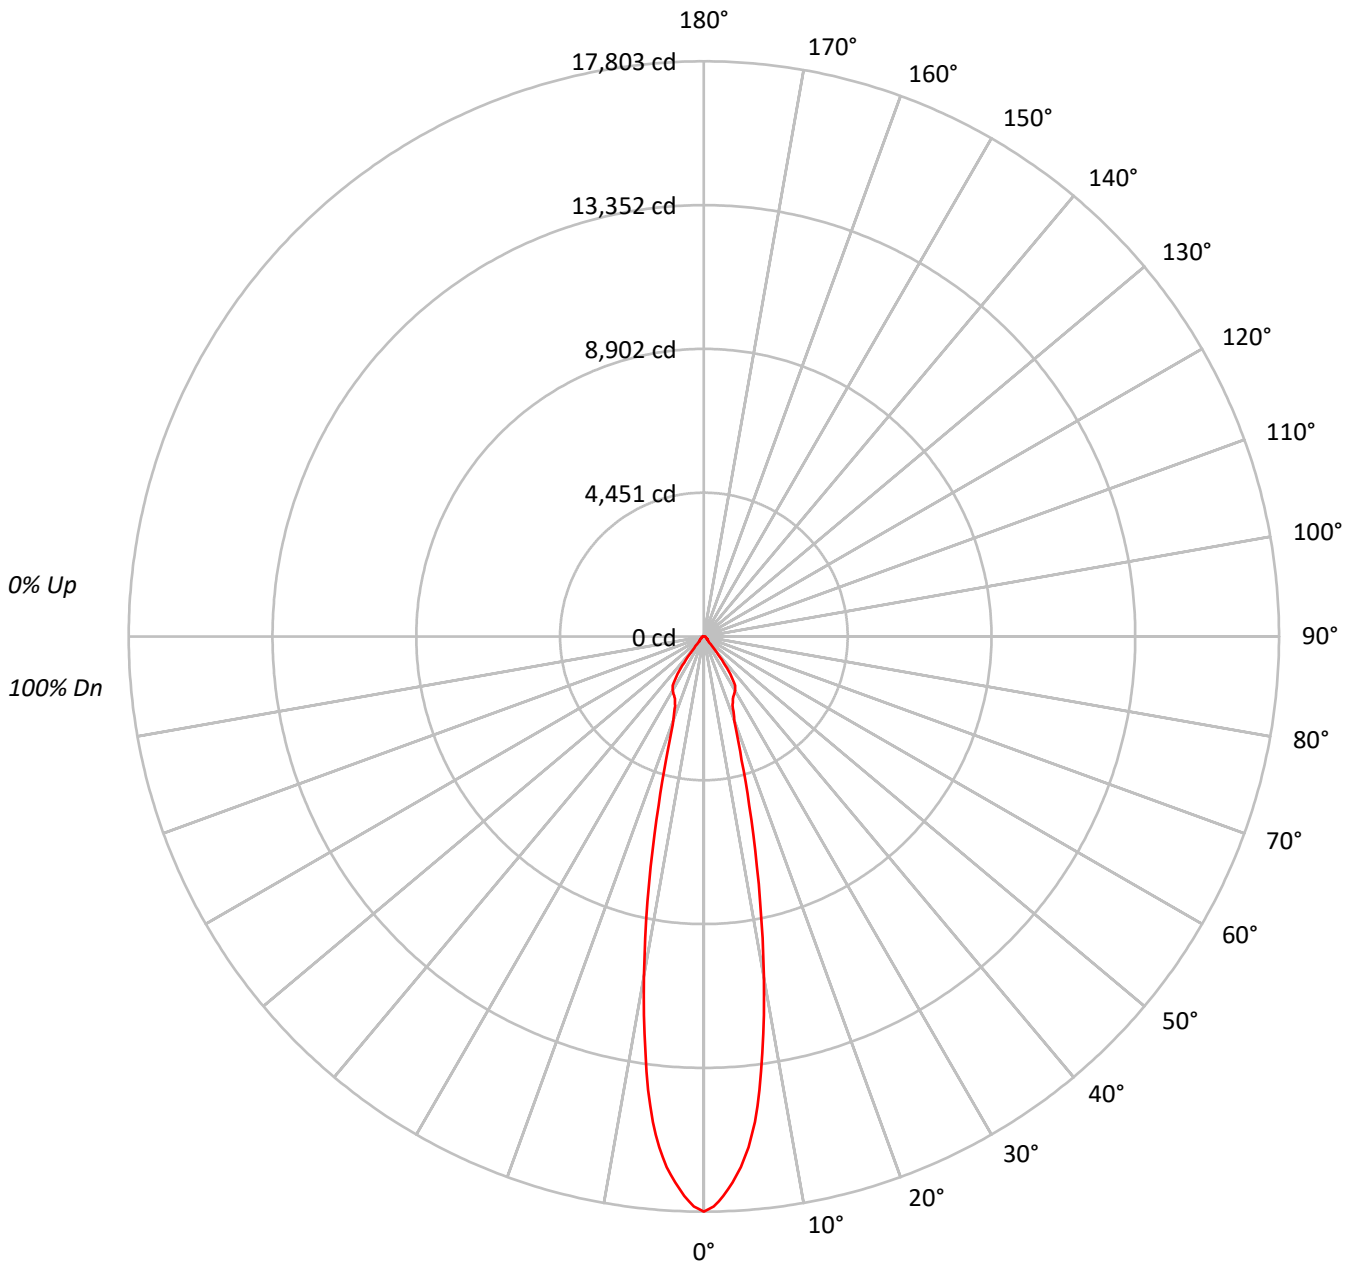



TEST NUMBER: P434697

CATALOG NUMBER: HCM4R25940ED010MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 114 | 111 | 109 | 107 | 111 | 109 | 107 | 105 | 105 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 96  | 94  |    |    |   |
| 2   | 109 | 104 | 100 | 97  | 107 | 102 | 99  | 96  | 99  | 96  | 94  | 96  | 94  | 92  | 94  | 92  | 90  | 88  |    |    |   |
| 3   | 104 | 98  | 93  | 90  | 102 | 97  | 92  | 89  | 94  | 91  | 88  | 92  | 89  | 86  | 89  | 87  | 85  | 83  |    |    |   |
| 4   | 100 | 93  | 88  | 84  | 98  | 92  | 87  | 83  | 89  | 85  | 82  | 88  | 84  | 81  | 86  | 83  | 80  | 79  |    |    |   |
| 5   | 95  | 88  | 83  | 79  | 94  | 87  | 82  | 78  | 85  | 81  | 78  | 84  | 80  | 77  | 82  | 79  | 76  | 75  |    |    |   |
| 6   | 92  | 84  | 78  | 75  | 90  | 83  | 78  | 74  | 81  | 77  | 74  | 80  | 76  | 73  | 79  | 75  | 73  | 72  |    |    |   |
| 7   | 88  | 80  | 75  | 71  | 87  | 79  | 74  | 71  | 78  | 74  | 70  | 77  | 73  | 70  | 76  | 72  | 70  | 68  |    |    |   |
| 8   | 85  | 76  | 71  | 68  | 84  | 76  | 71  | 67  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 69  | 67  | 65  |    |    |   |
| 9   | 82  | 73  | 68  | 65  | 81  | 73  | 68  | 65  | 72  | 68  | 64  | 71  | 67  | 64  | 70  | 67  | 64  | 63  |    |    |   |
| 10  | 79  | 70  | 65  | 62  | 78  | 70  | 65  | 62  | 69  | 65  | 62  | 69  | 65  | 62  | 68  | 64  | 62  | 60  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°      |
|-----|---------|
| 0°  | 8783587 |
| 5°  | 7861477 |
| 10° | 5351884 |
| 15° | 2766151 |
| 20° | 1442977 |
| 25° | 1158177 |
| 30° | 1099304 |
| 35° | 856117  |
| 40° | 295495  |
| 45° | 128664  |
| 50° | 110452  |
| 55° | 96684   |
| 60° | 84368   |
| 65° | 78802   |
| 70° | 84389   |
| 75° | 102939  |
| 80° | 127857  |
| 85° | 25474   |



TEST NUMBER: P434697

CATALOG NUMBER: HCM4R25940ED010MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1344.3 | 26.2      |
| 10°-20°   | 1545.1 | 30.2      |
| 20°-30°   | 1009.0 | 19.7      |
| 30°-40°   | 816.6  | 15.9      |
| 40°-50°   | 165.6  | 3.2       |
| 50°-60°   | 99.9   | 1.9       |
| 60°-70°   | 69.1   | 1.3       |
| 70°-80°   | 57.7   | 1.1       |
| 80°-90°   | 14.7   | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 3898.3 | 76.1      |
| 0°-40°    | 4715.0 | 92.1      |
| 0°-60°    | 4980.4 | 97.2      |
| 0°-90°    | 5121.8 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5121.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 17803 |      |
| 5°  | 15873 | ###  |
| 15° | 5416  | 1545 |
| 25° | 2128  | 1009 |
| 35° | 1421  | 817  |
| 45° | 184   | 166  |
| 55° | 112   | 100  |
| 65° | 68    | 69   |
| 75° | 54    | 58   |
| 85° | 4     | 15   |
| 90° | 0     |      |



TEST NUMBER: P434697

CATALOG NUMBER: HCM4R25940ED010MW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 17802.9 |
| 1°    | 17645.5 |
| 2°    | 17326.1 |
| 3°    | 16925.8 |
| 4°    | 16462.5 |
| 5°    | 15873.3 |
| 6°    | 15108.6 |
| 7°    | 14141.6 |
| 8°    | 13012.6 |
| 9°    | 11861.1 |
| 10°   | 10682.6 |
| 11°   | 9508.7  |
| 12°   | 8384.2  |
| 13°   | 7309.2  |
| 14°   | 6324.1  |
| 15°   | 5415.5  |
| 16°   | 4677.9  |
| 17°   | 3998.7  |
| 18°   | 3467.9  |
| 19°   | 3054.1  |
| 20°   | 2748.3  |
| 22.5° | 2320.9  |
| 25°   | 2127.5  |
| 26°   | 2078.1  |
| 27°   | 2042.1  |
| 28°   | 2006.1  |
| 29°   | 1965.6  |
| 30°   | 1929.6  |
| 32.5° | 1794.7  |
| 35°   | 1421.4  |
| 37.5° | 913.1   |
| 40°   | 458.8   |
| 42.5° | 220.4   |
| 45°   | 184.4   |
| 47.5° | 161.9   |
| 50°   | 143.9   |
| 52.5° | 125.9   |
| 55°   | 112.4   |
| 57.5° | 94.5    |
| 60°   | 85.5    |
| 62.5° | 76.5    |
| 65°   | 67.5    |
| 67.5° | 63.0    |



TEST NUMBER: P434697

CATALOG NUMBER: HCM4R25940ED010MW

**CANDELA DISTRIBUTION (continued):**

|       | 0°   |
|-------|------|
| 75°   | 54.0 |
| 77.5° | 54.0 |
| 80°   | 45.0 |
| 82.5° | 27.0 |
| 85°   | 4.5  |
| 87.5° | 0.0  |
| 90°   | 0.0  |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







|       |      |
|-------|------|
| 70°   | 58.5 |
| 72.5° | 58.5 |



(END OF REPORT)