

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P345251

Luminaire Tested: **PR4FS12D010 PR4M12MD8FSBZ 1000Lm3500K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P345251  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1908-453-3)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR4FS12D010 PR4M12MD8FSBZ 1000Lm3500K  
Description: PR4 MEDIUM LENS WITH, BRONZE FINISH  
Light Source: ARRAY OF HIGH LUMEN LEDs 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 830.5 lumens  
Efficiency: N/A  
Efficacy: 82.2 lumens/watt  
Spacing Criteria (0/90/45): 1/1/2001  
Luminous Opening: Circular (Dia: 0.4' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P345251

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1000Lm3500K

### Luminous Intensity Polar Plot

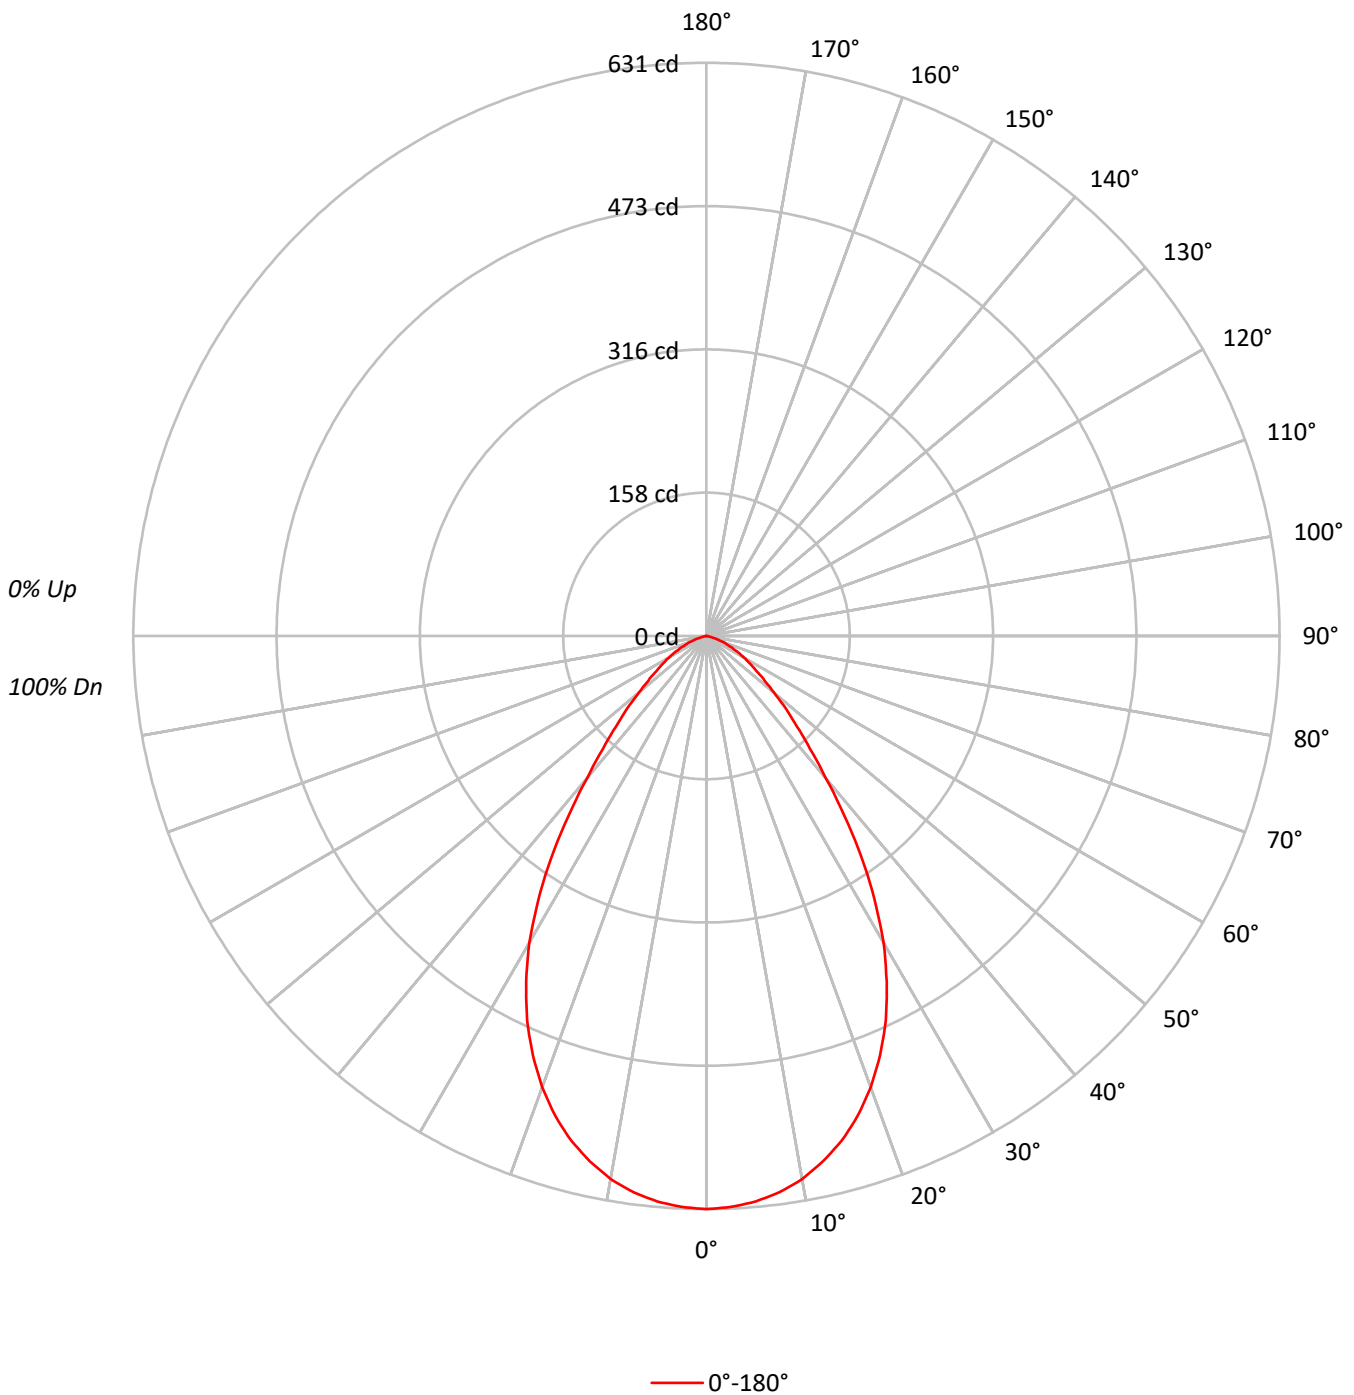



TEST NUMBER: P345251

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1000Lm3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82
3	98	91	85	80	96	89	84	79	86	82	78	84	80	76	81	78	75	73
4	92	83	76	71	90	82	76	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62	60
6	81	70	63	58	79	70	63	58	68	62	58	66	61	57	65	60	57	55
7	76	65	58	53	75	65	58	53	63	57	53	62	57	52	61	56	52	51
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	55193
5°	54868
10°	53931
15°	52096
20°	49222
25°	45071
30°	39380
35°	31767
40°	23339
45°	17417
50°	13159
55°	10263
60°	8345
65°	6457
70°	4706
75°	2264
80°	604
85°	602



TEST NUMBER: P345251

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1000Lm3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	59.1	7.1
10°-20°	161.1	19.4
20°-30°	212.8	25.6
30°-40°	184.3	22.2
40°-50°	110.9	13.3
50°-60°	61.8	7.4
60°-70°	31.6	3.8
70°-80°	8.2	1.0
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	433.1	52.1
0°-40°	617.4	74.3
0°-60°	790.0	95.1
0°-90°	830.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	830.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	631	
5°	625	59
15°	575	161
25°	467	213
35°	298	184
45°	141	111
55°	67	62
65°	31	32
75°	7	8
85°	1	1
90°	0	



TEST NUMBER: P345251

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1000Lm3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	631.0
2.5°	629.2
5°	624.9
7.5°	617.6
10°	607.2
12.5°	592.5
15°	575.3
17.5°	553.9
20°	528.8
22.5°	499.4
25°	467.0
27.5°	429.7
30°	389.9
32.5°	344.6
35°	297.5
37.5°	249.1
40°	204.4
42.5°	168.9
45°	140.8
47.5°	118.1
50°	96.7
52.5°	80.8
55°	67.3
57.5°	56.9
60°	47.7
62.5°	39.2
65°	31.2
67.5°	24.5
70°	18.4
72.5°	12.2
75°	6.7
77.5°	2.4
80°	1.2
82.5°	1.2
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)