

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P345258

Luminaire Tested: **PR4FS12D010 PR4M12MD8FSBZ 1500Lm4000K**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P345258
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1908-453-3)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: PR4FS12D010 PR4M12MD8FSBZ 1500Lm4000K
Description: PR4 MEDIUM LENS WITH, BRONZE FINISH
Light Source: ARRAY OF HIGH LUMEN LEDs 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1072.0 lumens
Efficiency: N/A
Efficacy: 77.1 lumens/watt
Spacing Criteria (0/90/45): 1/1/2001
Luminous Opening: Circular (Dia: 0.4' x H: 0')
CIE Type: Direct


Input Watts (W): 13.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P345258

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1500lm4000K

Luminous Intensity Polar Plot

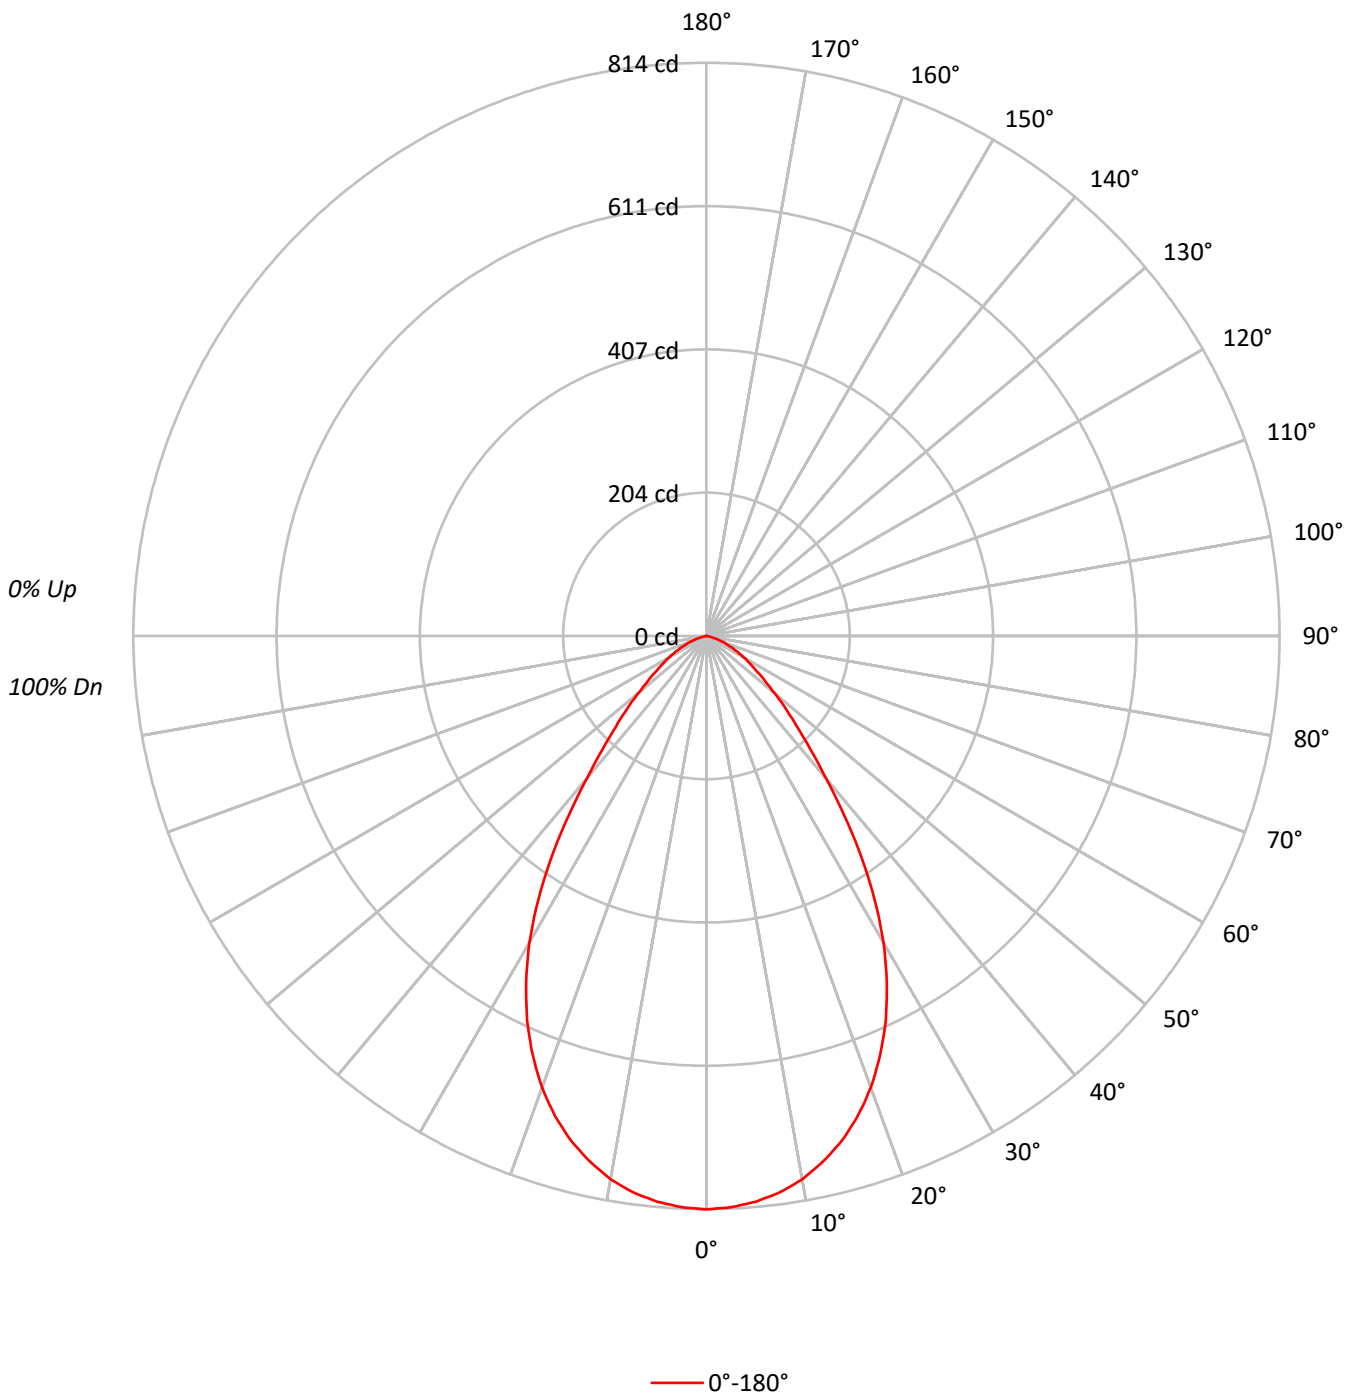



TEST NUMBER: P345258

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1500Lm4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82
3	98	91	85	80	96	89	84	79	86	82	78	84	80	76	81	78	75	73
4	92	83	76	71	90	82	76	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62	60
6	81	70	63	58	79	70	63	58	68	62	58	66	61	57	65	60	57	55
7	76	65	58	53	75	65	58	53	63	57	53	62	57	52	61	56	52	51
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71235
5°	70814
10°	69598
15°	67237
20°	63529
25°	58168
30°	50824
35°	40993
40°	30122
45°	22476
50°	16983
55°	13252
60°	10776
65°	8341
70°	6061
75°	2940
80°	806
85°	803



TEST NUMBER: P345258

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1500Lm4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.3	7.1
10°-20°	208.0	19.4
20°-30°	274.7	25.6
30°-40°	237.9	22.2
40°-50°	143.1	13.3
50°-60°	79.7	7.4
60°-70°	40.7	3.8
70°-80°	10.6	1.0
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	558.9	52.1
0°-40°	796.8	74.3
0°-60°	1019.6	95.1
0°-90°	1072.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1072.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	814	
5°	806	76
15°	742	208
25°	603	275
35°	384	238
45°	182	143
55°	87	80
65°	40	41
75°	9	11
85°	1	1
90°	0	



TEST NUMBER: P345258

CATALOG NUMBER: PR4FS12D010 PR4M12MD8FSBZ 1500Lm4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	814.4
2.5°	812.0
5°	806.5
7.5°	797.0
10°	783.6
12.5°	764.6
15°	742.5
17.5°	714.9
20°	682.5
22.5°	644.6
25°	602.7
27.5°	554.5
30°	503.2
32.5°	444.7
35°	383.9
37.5°	321.5
40°	263.8
42.5°	218.0
45°	181.7
47.5°	152.5
50°	124.8
52.5°	104.3
55°	86.9
57.5°	73.5
60°	61.6
62.5°	50.6
65°	40.3
67.5°	31.6
70°	23.7
72.5°	15.8
75°	8.7
77.5°	3.2
80°	1.6
82.5°	1.6
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)