

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P345232

Luminaire Tested: **PR4FS24D010 PR4M24MD8FSMMS 2000Lm3000K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P345232  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1908-453-2)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR4FS24D010 PR4M24MD8FSMMS 2000Lm3000K  
Description: PR4 MEDIUM LENS WITH, MATTE METALLIC SILVER FINISH  
Light Source: ARRAY OF HIGH LUMEN LEDs 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1841.7 lumens  
Efficiency: N/A  
Efficacy: 83.7 lumens/watt  
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.02  
Luminous Opening: Circular (Dia: 0.4' x H: 0')  
CIE Type: Direct


Input Watts (W): 22  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P345232

CATALOG NUMBER: PR4FS24D010 PR4M24MD8FSMMS 2000Lm3000K

### Luminous Intensity Polar Plot

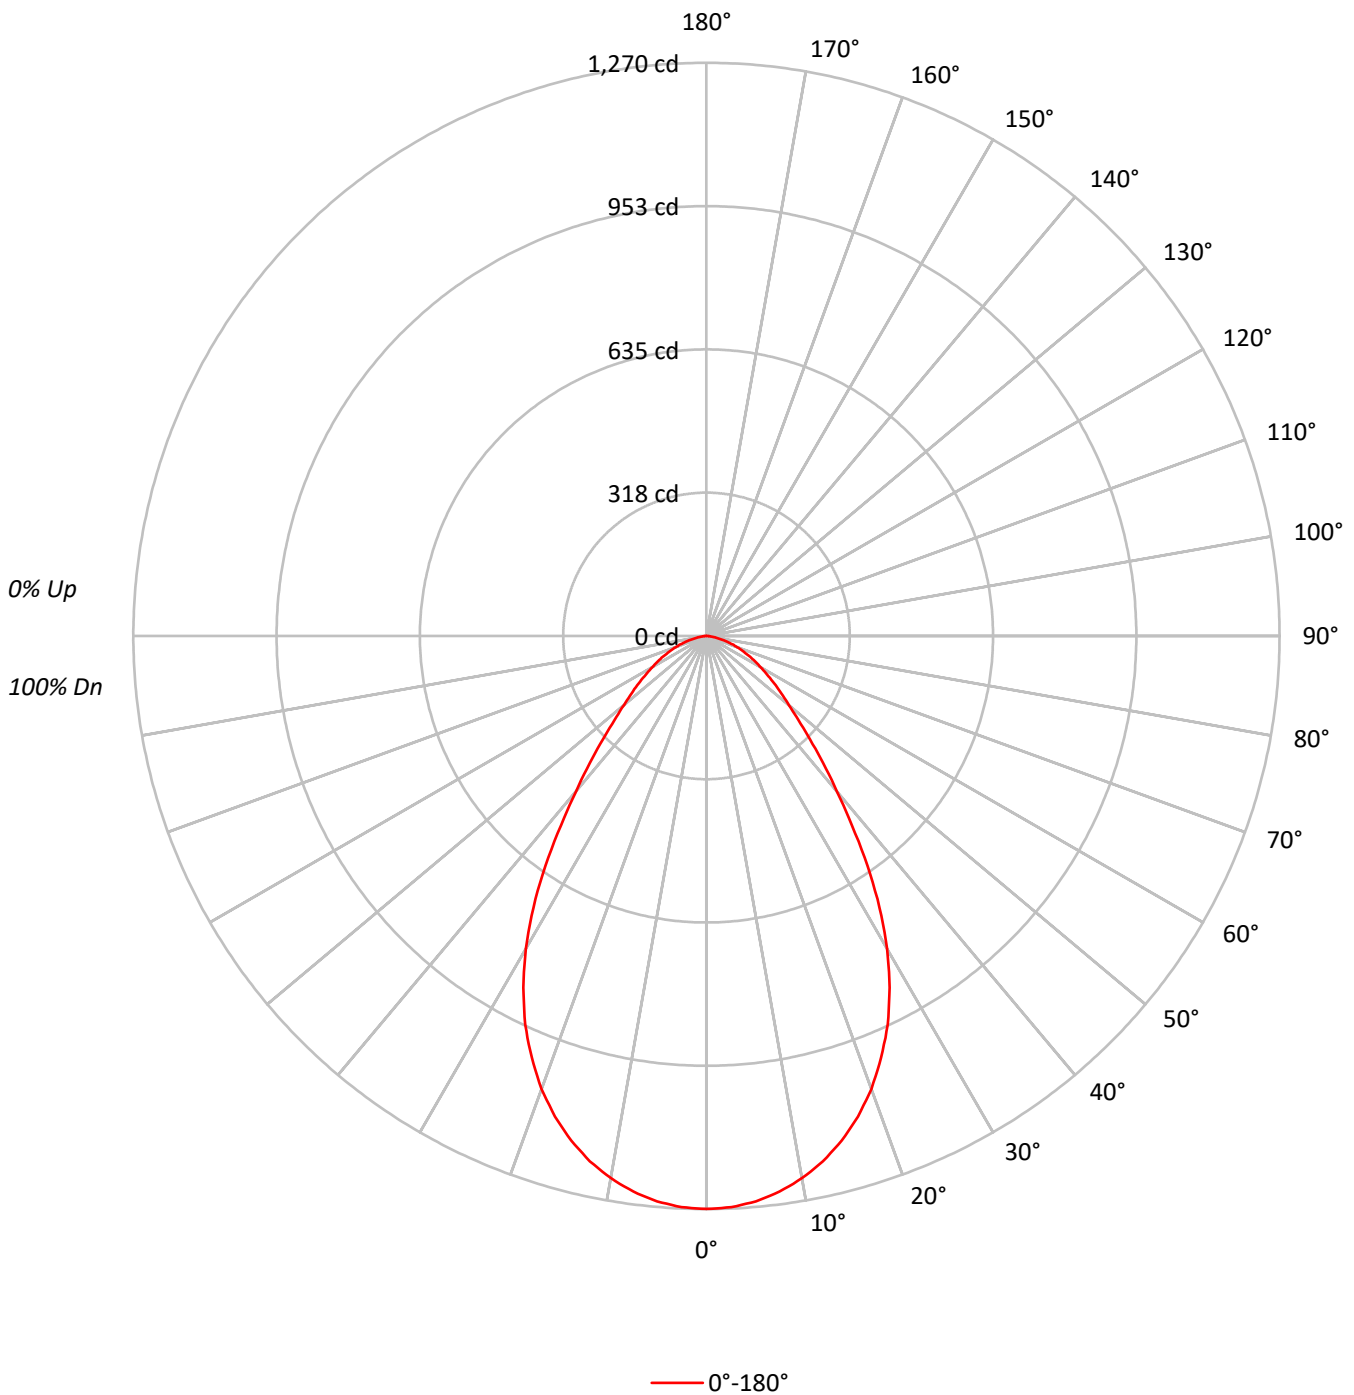



TEST NUMBER: P345232

CATALOG NUMBER: PR4FS24D010 PR4M24MD8FSMMS 2000Lm3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	108	105	102	109	106	103	100	101	99	97		98	96	94		94	93	91	89
2	104	97	92	88	101	96	91	87	92	88	85		89	86	83		86	83	81	79
3	97	88	82	77	94	87	81	76	84	79	75		81	77	73		79	75	72	70
4	90	80	73	68	88	79	73	67	77	71	67		75	70	66		73	68	65	63
5	84	74	66	61	82	73	66	60	71	65	60		69	63	59		67	62	59	57
6	79	68	60	55	77	67	60	55	65	59	54		64	58	54		62	57	53	52
7	74	63	55	50	72	62	55	50	60	54	49		59	53	49		58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	44	39	61	50	43	39	49	43	39		48	43	39		47	42	39	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	111042
5°	110413
10°	108368
15°	104808
20°	99431
25°	91686
30°	80851
35°	66428
40°	51348
45°	40116
50°	32482
55°	27953
60°	24247
65°	21463
70°	18490
75°	14667
80°	10326
85°	6022



TEST NUMBER: P345232

CATALOG NUMBER: PR4FS24D010 PR4M24MD8FSMMS 2000Lm3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	118.8	6.5
10°-20°	324.5	17.6
20°-30°	433.2	23.5
30°-40°	386.7	21.0
40°-50°	254.6	13.8
50°-60°	165.0	9.0
60°-70°	102.9	5.6
70°-80°	47.1	2.6
80°-90°	8.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	876.6	47.6
0°-40°	1263.3	68.6
0°-60°	1683.0	91.4
0°-90°	1841.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1841.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1270	
5°	1258	119
15°	1157	325
25°	950	433
35°	622	387
45°	324	255
55°	183	165
65°	104	103
75°	43	47
85°	6	9
90°	0	



TEST NUMBER: P345232

CATALOG NUMBER: PR4FS24D010 PR4M24MD8FSMMS 2000Lm3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1269.5
2.5°	1267.1
5°	1257.5
7.5°	1241.8
10°	1220.1
12.5°	1192.4
15°	1157.4
17.5°	1116.4
20°	1068.2
22.5°	1011.5
25°	950.0
27.5°	878.9
30°	800.5
32.5°	713.7
35°	622.1
37.5°	529.3
40°	449.7
42.5°	382.2
45°	324.3
47.5°	276.1
50°	238.7
52.5°	208.6
55°	183.3
57.5°	159.1
60°	138.6
62.5°	120.6
65°	103.7
67.5°	86.8
70°	72.3
72.5°	57.9
75°	43.4
77.5°	31.3
80°	20.5
82.5°	12.1
85°	6.0
87.5°	3.6
90°	0.0

(END OF REPORT)