

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P345393

Luminaire Tested: **PR4FS24D010 PR4M24WD9FSBZ 4000Lm4000K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P345393  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1908-453-6)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR4FS24D010 PR4M24WD9FSBZ 4000Lm4000K  
Description: PR4 WIDE LENS WITH, BRONZE FINISH  
Light Source: ARRAY OF HIGH LUMEN LEDs 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2628.9 lumens  
Efficiency: N/A  
Efficacy: 58.4 lumens/watt  
Spacing Criteria (0/90/45): 1.62 / 1.62 / 1.57  
Luminous Opening: Circular (Dia: 0.4' x H: 0')  
CIE Type: Direct


Input Watts (W): 45  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P345393

CATALOG NUMBER: PR4FS24D010 PR4M24WD9FSBZ 4000Lm4000K

### Luminous Intensity Polar Plot

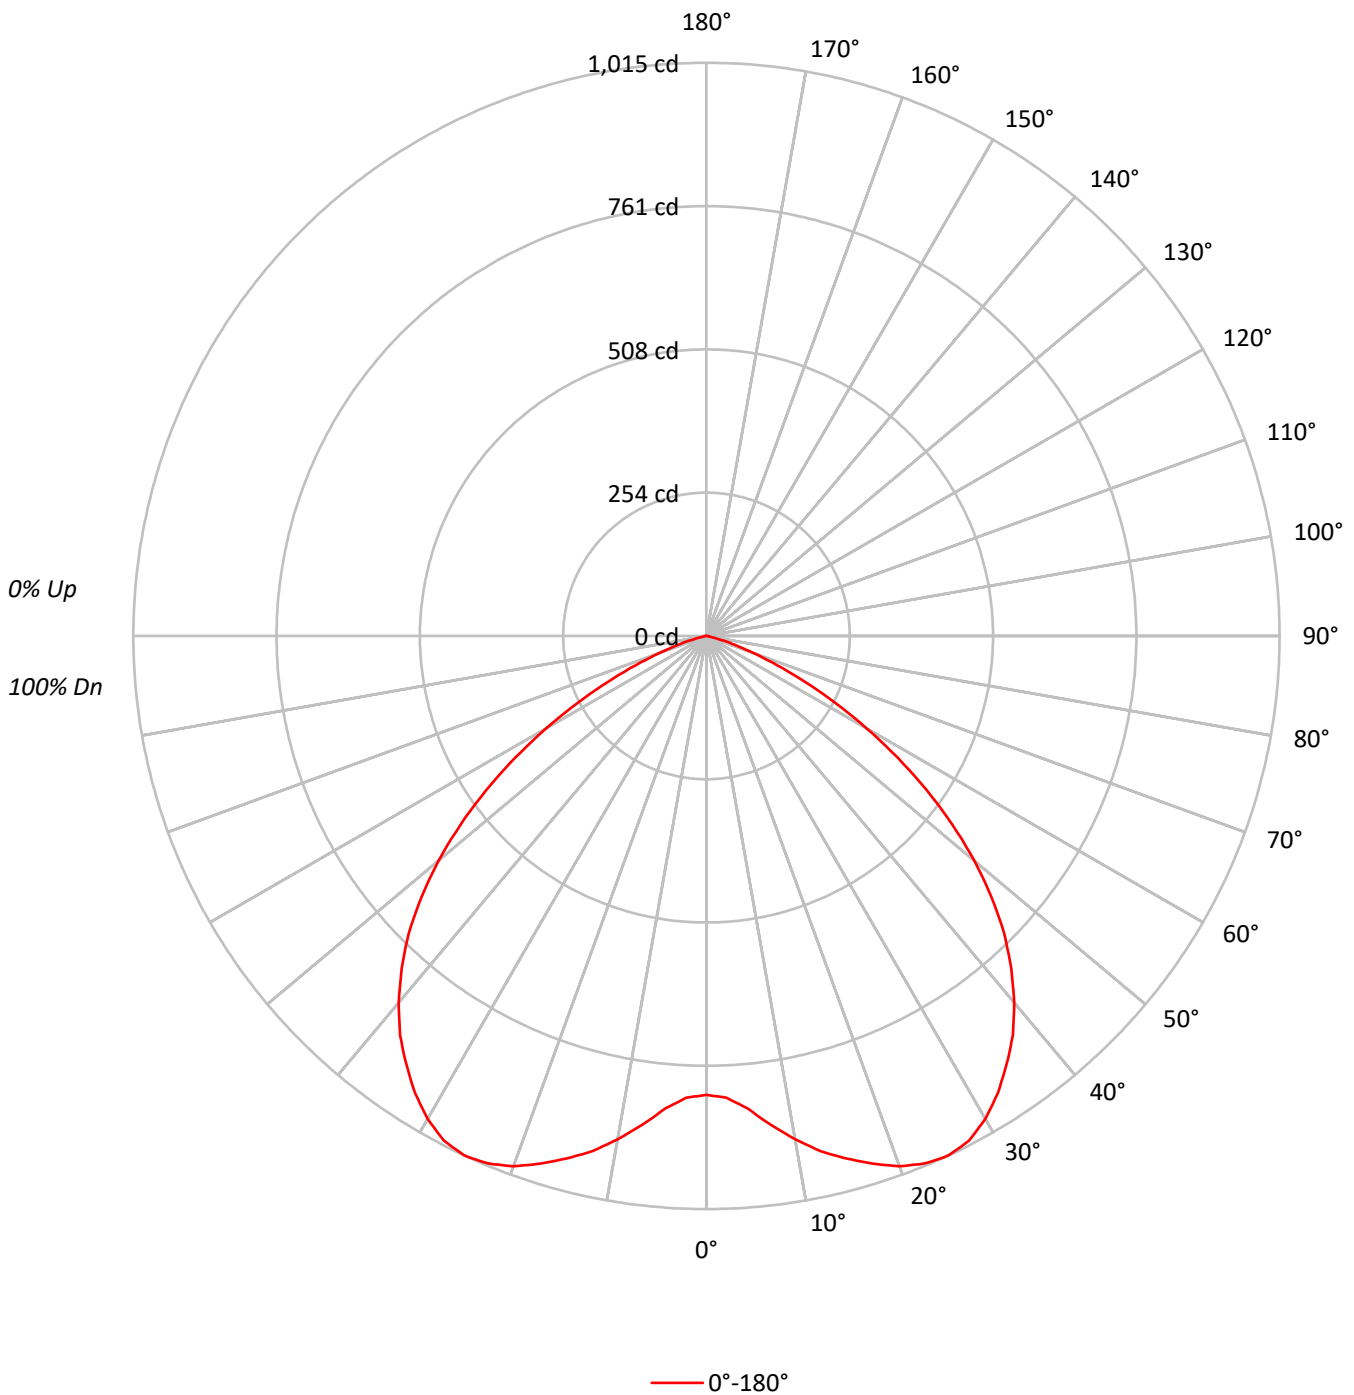



TEST NUMBER: P345393

CATALOG NUMBER: PR4FS24D010 PR4M24WD9FSBZ 4000Lm4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88
2	102	95	89	84	100	93	88	83	90	85	81	87	83	80	84	81	78	76
3	94	85	77	72	91	83	76	71	80	74	70	77	73	69	75	71	67	65
4	86	75	67	61	84	74	67	61	72	65	60	69	64	59	67	63	59	57
5	80	68	59	53	78	67	59	53	65	58	52	63	57	52	61	56	51	49
6	74	61	53	47	72	60	52	46	58	51	46	57	51	46	55	50	45	43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	38
8	63	51	42	37	62	50	42	37	49	41	36	47	41	36	46	40	36	34
9	59	46	38	33	58	46	38	33	45	38	33	44	37	33	43	37	32	31
10	55	43	35	30	54	42	35	30	41	34	30	40	34	30	39	34	29	28

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	71069
5°	73755
10°	80381
15°	86761
20°	93027
25°	97969
30°	99749
35°	98943
40°	96816
45°	92231
50°	84328
55°	72604
60°	57467
65°	39904
70°	22633
75°	9294
80°	1964
85°	3914



TEST NUMBER: P345393

CATALOG NUMBER: PR4FS24D010 PR4M24WD9FSBZ 4000Lm4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.4	3.1
10°-20°	272.4	10.4
20°-30°	465.9	17.7
30°-40°	578.7	22.0
40°-50°	571.2	21.7
50°-60°	423.7	16.1
60°-70°	195.7	7.4
70°-80°	35.8	1.4
80°-90°	3.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	820.6	31.2
0°-40°	1399.3	53.2
0°-60°	2394.3	91.1
0°-90°	2628.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2628.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	812	
5°	840	82
15°	958	272
25°	1015	466
35°	927	579
45°	746	571
55°	476	424
65°	193	196
75°	28	36
85°	4	3
90°	0	



TEST NUMBER: P345393

CATALOG NUMBER: PR4FS24D010 PR4M24WD9FSBZ 4000Lm4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	812.5
2.5°	818.4
5°	840.0
7.5°	873.5
10°	905.0
12.5°	934.5
15°	958.1
17.5°	979.7
20°	999.4
22.5°	1011.2
25°	1015.1
27.5°	1007.3
30°	987.6
32.5°	960.0
35°	926.6
37.5°	891.2
40°	847.9
42.5°	798.7
45°	745.6
47.5°	684.6
50°	619.7
52.5°	548.9
55°	476.1
57.5°	401.3
60°	328.5
62.5°	257.7
65°	192.8
67.5°	135.7
70°	88.5
72.5°	53.1
75°	27.5
77.5°	9.8
80°	3.9
82.5°	3.9
85°	3.9
87.5°	2.0
90°	0.0

(END OF REPORT)