

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P303353

Luminaire Tested: **PR6FS12D010 PR6M12MD8FSBZ 1500Lm3000K**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P303353
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1903-195-3)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: PR6FS12D010 PR6M12MD8FSBZ 1500Lm3000K
Description: PR6 MEDIUM LENS WITH, BRONZE FINISH
Light Source: ARRAY OF HIGH LUMEN LEDs 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1351.9 lumens
Efficiency: N/A
Efficacy: 97.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.24
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 13.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P303353

CATALOG NUMBER: PR6FS12D010 PR6M12MD8FSBZ 1500Lm3000K

Luminous Intensity Polar Plot

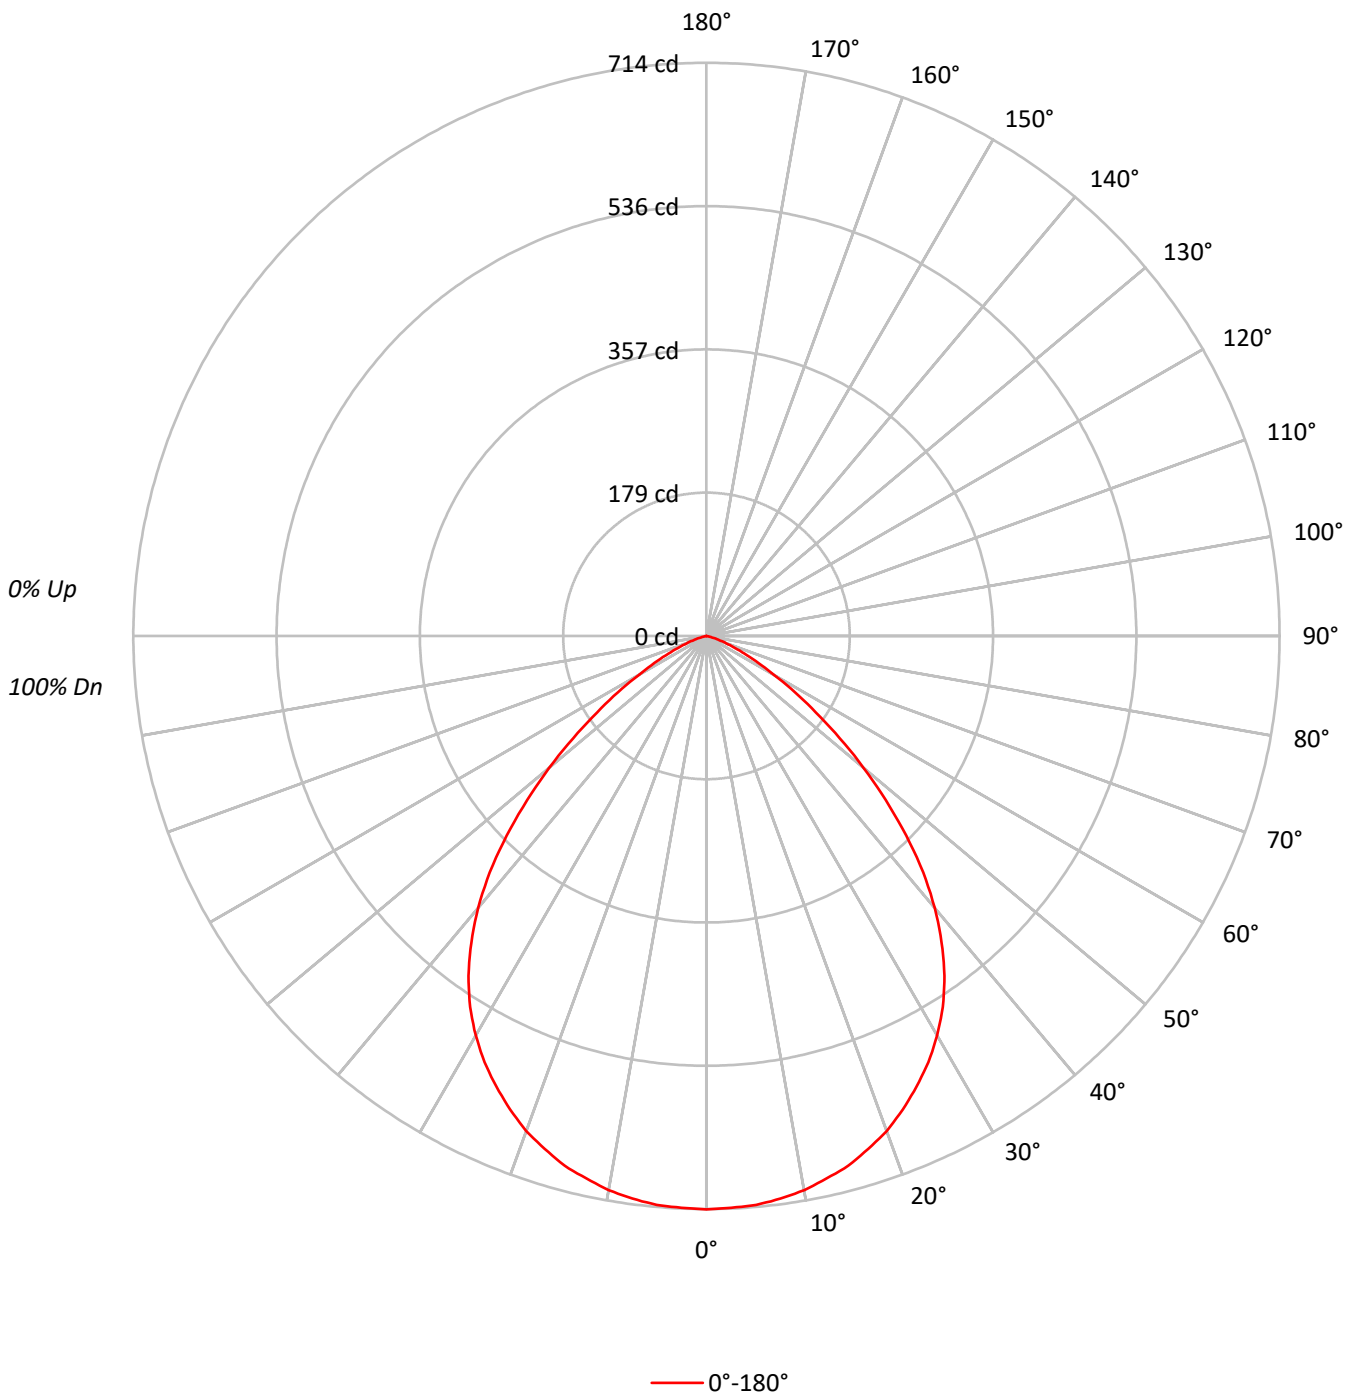



TEST NUMBER: P303353

CATALOG NUMBER: PR6FS12D010 PR6M12MD8FSBZ 1500Lm3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	94	95	93	92	90
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79
3	97	88	82	76	94	87	81	76	84	79	74	81	77	73	79	75	72	70
4	90	80	73	67	88	78	72	67	76	70	66	74	69	65	72	68	64	62
5	83	72	65	59	81	71	64	59	69	63	58	68	62	58	66	61	57	55
6	78	66	58	53	76	65	58	53	64	57	52	62	56	52	61	55	51	50
7	72	61	53	48	71	60	53	47	58	52	47	57	51	47	56	51	46	45
8	68	56	48	43	66	55	48	43	54	47	43	53	47	42	52	46	42	41
9	64	52	44	39	62	51	44	39	50	43	39	49	43	39	48	43	39	37
10	60	48	41	36	59	47	40	36	46	40	36	45	40	35	45	39	35	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	46608
5°	46596
10°	46446
15°	46145
20°	45579
25°	44588
30°	43302
35°	41168
40°	37694
45°	32477
50°	25932
55°	18927
60°	12787
65°	8027
70°	4540
75°	1865
80°	0
85°	0



TEST NUMBER: P303353

CATALOG NUMBER: PR6FS12D010 PR6M12MD8FSBZ 1500Lm3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	67.6	5.0
10°-20°	192.4	14.2
20°-30°	285.0	21.1
30°-40°	321.1	23.8
40°-50°	269.8	20.0
50°-60°	151.9	11.2
60°-70°	54.4	4.0
70°-80°	9.7	0.7
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	545.0	40.3
0°-40°	866.1	64.1
0°-60°	1287.7	95.3
0°-90°	1351.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1351.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	714	
5°	712	68
15°	683	192
25°	619	285
35°	517	321
45°	352	270
55°	166	152
65°	52	54
75°	7	10
85°	0	0
90°	0	



TEST NUMBER: P303353

CATALOG NUMBER: PR6FS12D010 PR6M12MD8FSBZ 1500Lm3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	714.4
2.5°	713.0
5°	711.5
7.5°	707.0
10°	701.1
12.5°	692.2
15°	683.2
17.5°	669.9
20°	656.5
22.5°	638.7
25°	619.4
27.5°	598.6
30°	574.8
32.5°	548.1
35°	516.9
37.5°	481.2
40°	442.6
42.5°	399.6
45°	352.0
47.5°	303.0
50°	255.5
52.5°	209.4
55°	166.4
57.5°	130.7
60°	98.0
62.5°	72.8
65°	52.0
67.5°	35.6
70°	23.8
72.5°	14.9
75°	7.4
77.5°	3.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)