

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P303443

Luminaire Tested: **PR6FS12D010 PR6M12WD8FSBZ 1500Lm3000K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P303443  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1903-195-6)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR6FS12D010 PR6M12WD8FSBZ 1500Lm3000K  
Description: PR6 WIDE LENS WITH, BRONZE FINISH  
Light Source: ARRAY OF HIGH LUMEN LEDs 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1338.7 lumens  
Efficiency: N/A  
Efficacy: 96.3 lumens/watt  
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.26  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 13.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P303443

CATALOG NUMBER: PR6FS12D010 PR6M12WD8FSBZ 1500Lm3000K

### Luminous Intensity Polar Plot

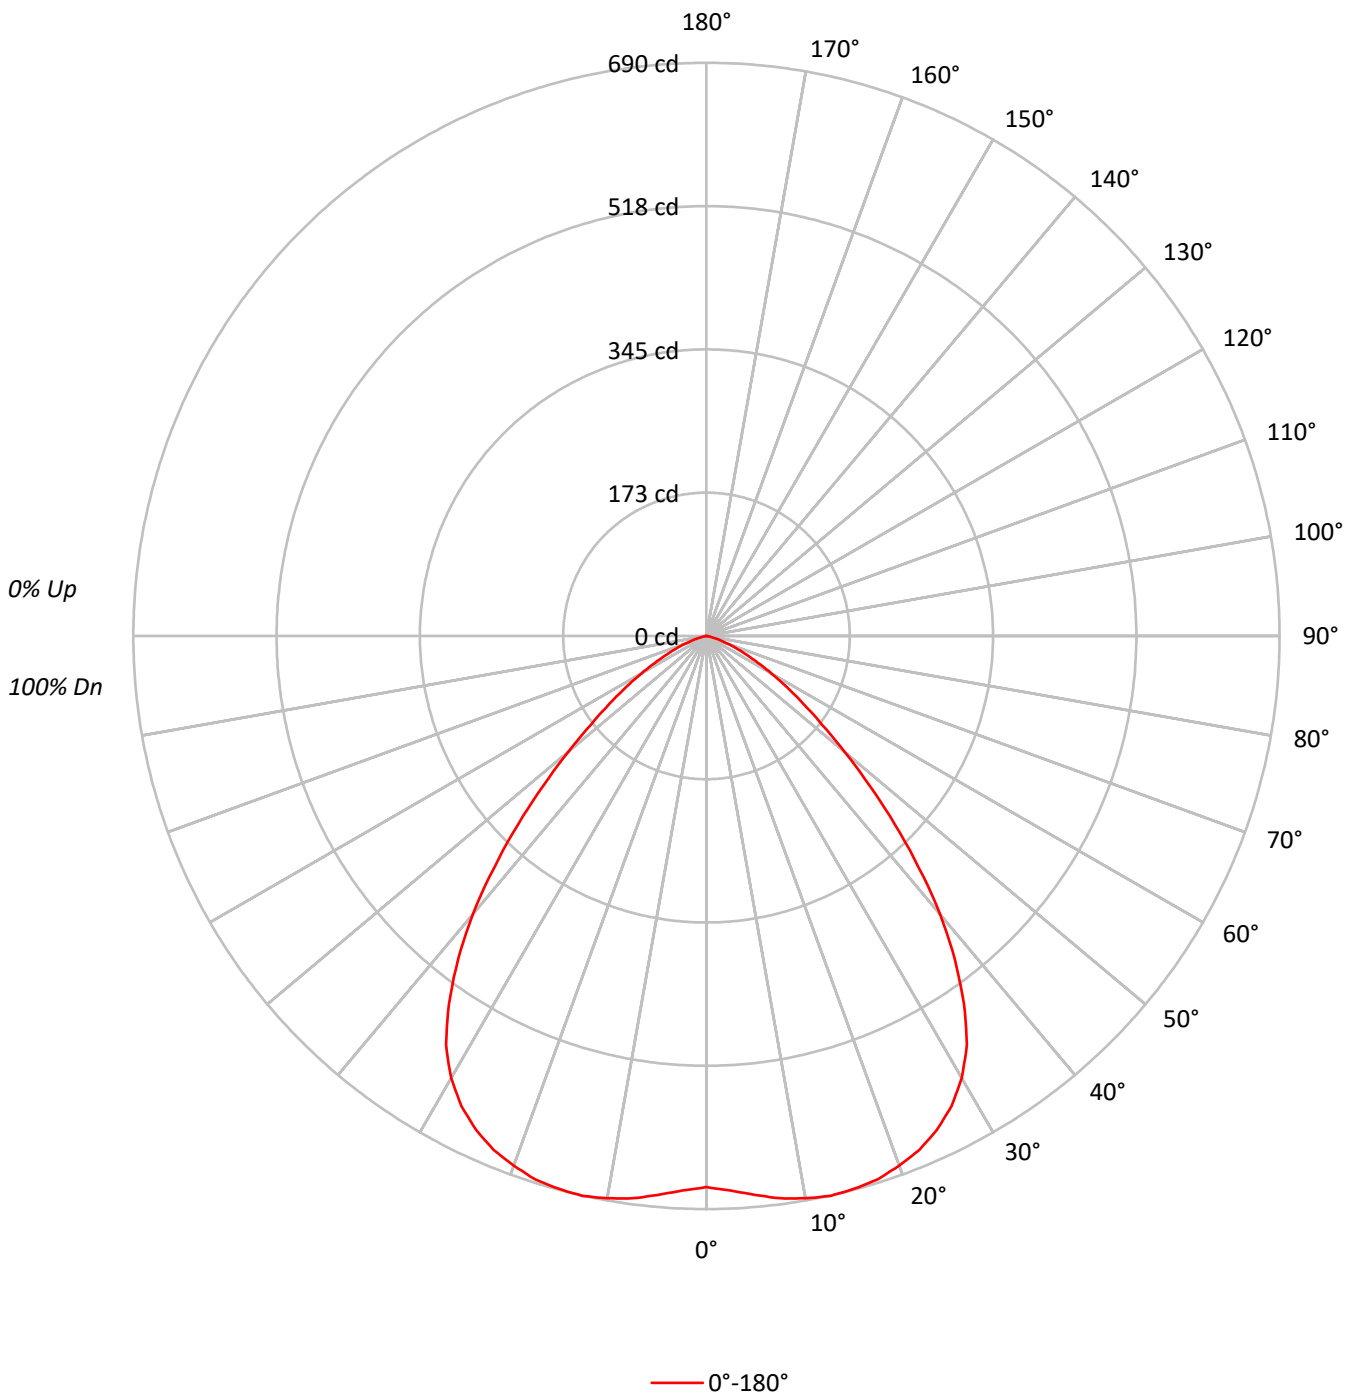



TEST NUMBER: P303443

CATALOG NUMBER: PR6FS12D010 PR6M12WD8FSBZ 1500Lm3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85		90	86	83		87	84	82	80
3	97	88	82	77	95	87	81	76	84	79	75		82	77	74		79	76	73	71
4	90	80	73	68	88	79	72	67	77	71	66		75	70	66		73	68	65	63
5	84	73	66	60	82	72	65	60	70	64	59		68	63	59		67	62	58	56
6	78	67	59	54	76	66	59	53	64	58	53		63	57	53		61	56	52	50
7	73	61	54	48	71	61	53	48	59	53	48		58	52	48		56	51	47	46
8	68	56	49	44	67	56	49	44	55	48	43		53	48	43		52	47	43	41
9	64	52	45	40	63	52	45	40	51	44	40		50	44	40		49	43	39	38
10	60	48	41	37	59	48	41	37	47	41	36		46	40	36		45	40	36	35

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	43294
5°	44238
10°	45538
15°	46530
20°	47107
25°	47237
30°	46300
35°	43040
40°	37303
45°	29589
50°	22004
55°	16208
60°	11822
65°	8027
70°	5093
75°	2243
80°	564
85°	0



TEST NUMBER: P303443

CATALOG NUMBER: PR6FS12D010 PR6M12WD8FSBZ 1500Lm3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	64.9	4.8
10°-20°	194.6	14.5
20°-30°	301.2	22.5
30°-40°	334.1	25.0
40°-50°	247.9	18.5
50°-60°	130.3	9.7
60°-70°	54.0	4.0
70°-80°	11.5	0.9
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	560.7	41.9
0°-40°	894.9	66.8
0°-60°	1273.1	95.1
0°-90°	1338.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1338.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	664	
5°	676	65
15°	689	195
25°	656	301
35°	540	334
45°	321	248
55°	142	130
65°	52	54
75°	9	11
85°	0	0
90°	0	



TEST NUMBER: P303443

CATALOG NUMBER: PR6FS12D010 PR6M12WD8FSBZ 1500Lm3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	663.6
2.5°	668.1
5°	675.5
7.5°	682.9
10°	687.4
12.5°	690.4
15°	688.9
17.5°	685.9
20°	678.5
22.5°	669.6
25°	656.2
27.5°	638.4
30°	614.6
32.5°	583.5
35°	540.4
37.5°	491.4
40°	438.0
42.5°	378.6
45°	320.7
47.5°	265.8
50°	216.8
52.5°	175.2
55°	142.5
57.5°	114.3
60°	90.6
62.5°	69.8
65°	52.0
67.5°	38.6
70°	26.7
72.5°	17.8
75°	8.9
77.5°	3.0
80°	1.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)