

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P210395

Luminaire Tested: **PR8R15D010 - PR8M12WDMMS - 3500K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P210395  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29051)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR8R15D010 - PR8M12WDMMS - 3500K  
Description: HALO 8" ROUND DOWNLIGHT, WIDE LENS, MATTE METALLIC SILVER FINISH  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1723.9 lumens  
Efficiency: N/A  
Efficacy: 114.9 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.37 / 1.39  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 15  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P210395

CATALOG NUMBER: PR8R15D010 - PR8M12WDMMS - 3500K

### Luminous Intensity Polar Plot

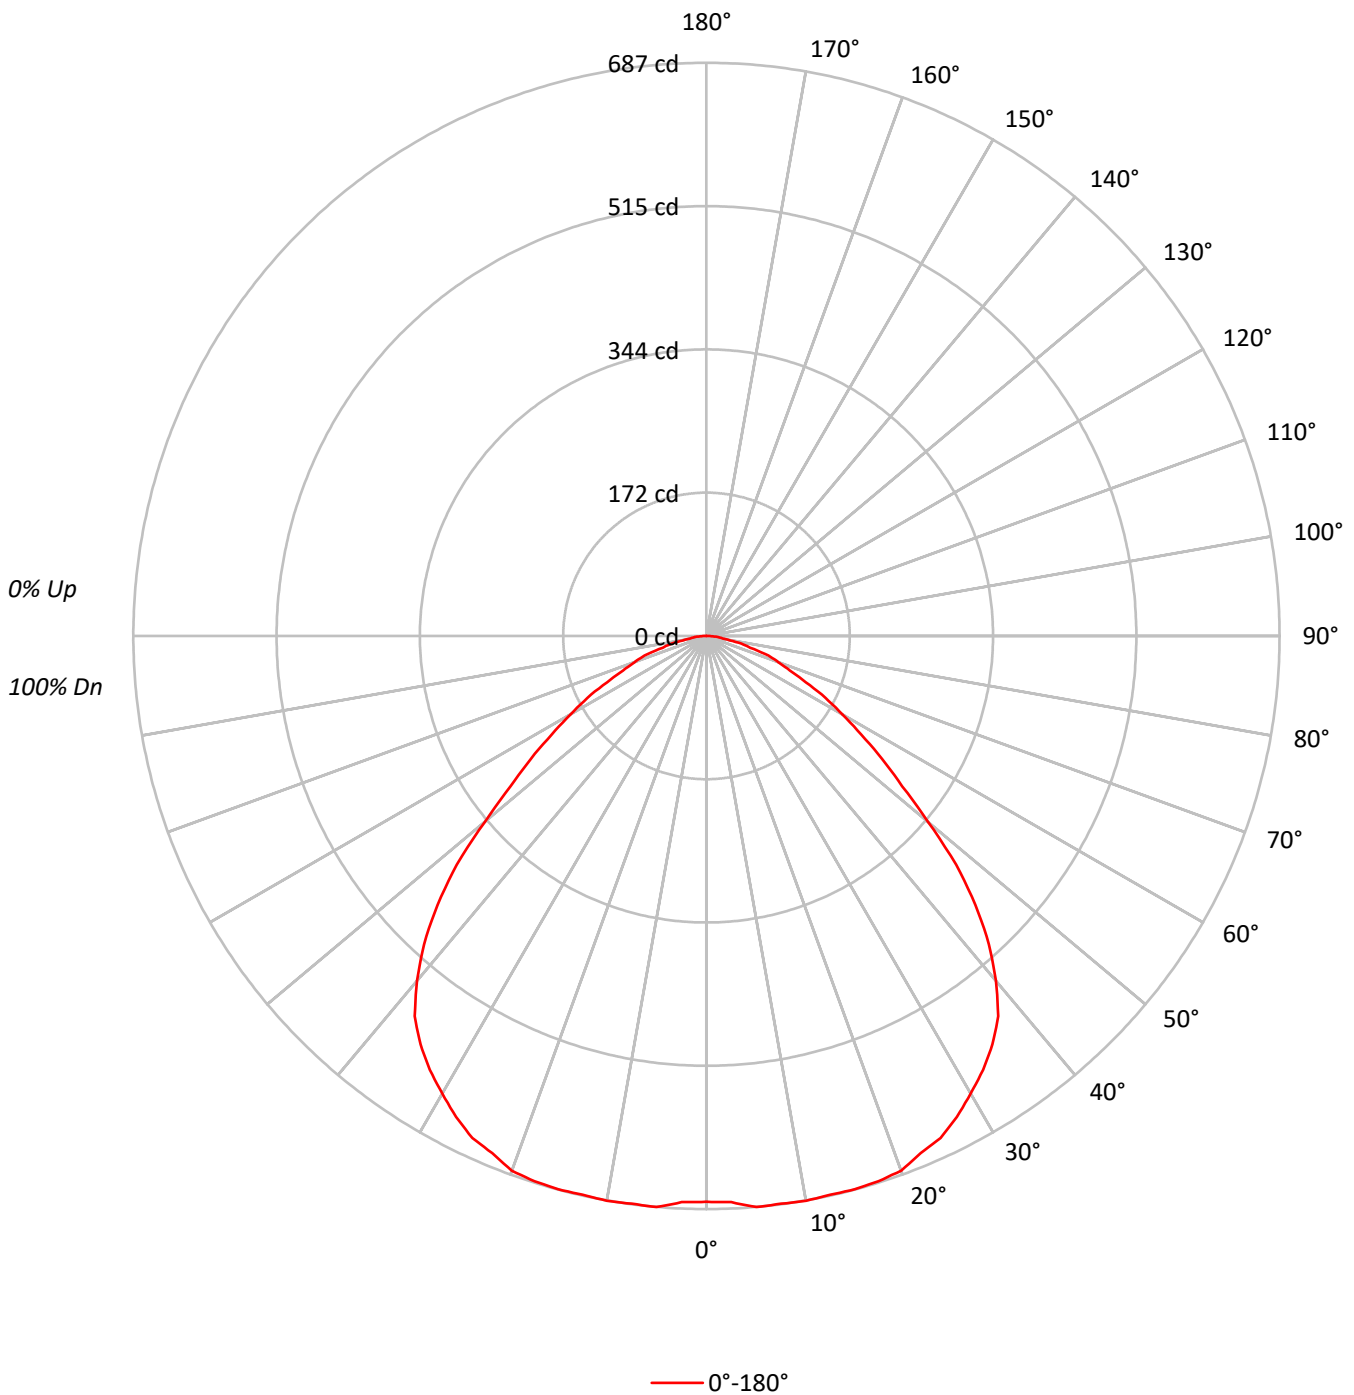



TEST NUMBER: P210395

CATALOG NUMBER: PR8R15D010 - PR8M12WDMMS - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	92	91	89	87
2	102	94	88	83	99	92	87	82	89	84	80	86	82	79	83	80	77	75
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65
4	86	75	67	61	84	74	66	61	71	65	60	69	64	59	67	62	58	56
5	80	68	59	53	78	67	59	53	64	58	52	63	57	52	61	56	51	49
6	74	61	53	47	72	60	52	47	59	52	46	57	51	46	55	50	46	44
7	68	56	48	42	67	55	47	42	53	46	41	52	46	41	51	45	41	39
8	64	51	43	37	62	50	43	37	49	42	37	48	42	37	47	41	37	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	37	33	31
10	56	43	36	31	55	43	36	31	42	35	31	41	35	30	40	34	30	29

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	20916
5°	21269
10°	21524
15°	21922
20°	22383
25°	22589
30°	22553
35°	22500
40°	21717
45°	19890
50°	16613
55°	13811
60°	11607
65°	9595
70°	8250
75°	6469
80°	4475
85°	4706



TEST NUMBER: P210395

CATALOG NUMBER: PR8R15D010 - PR8M12WDMMS - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	65.4	3.8
10°-20°	194.3	11.3
20°-30°	305.2	17.7
30°-40°	372.0	21.6
40°-50°	347.7	20.2
50°-60°	231.9	13.5
60°-70°	133.4	7.7
70°-80°	61.5	3.6
80°-90°	12.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	564.9	32.8
0°-40°	936.9	54.3
0°-60°	1516.5	88.0
0°-90°	1723.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1723.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	678	
5°	687	65
15°	687	194
25°	664	305
35°	598	372
45°	456	348
55°	257	232
65°	132	133
75°	54	62
85°	13	12
90°	0	



TEST NUMBER: P210395

CATALOG NUMBER: PR8R15D010 - PR8M12WDMMS - 3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	678.3
2.5°	679.3
5°	687.1
7.5°	686.4
10°	687.4
12.5°	686.0
15°	686.7
17.5°	685.3
20°	682.1
22.5°	670.9
25°	663.9
27.5°	649.9
30°	633.4
32.5°	616.9
35°	597.7
37.5°	574.5
40°	539.5
42.5°	501.3
45°	456.1
47.5°	405.9
50°	346.3
52.5°	295.9
55°	256.9
57.5°	219.8
60°	188.2
62.5°	160.9
65°	131.5
67.5°	108.0
70°	91.5
72.5°	77.8
75°	54.3
77.5°	43.1
80°	25.2
82.5°	16.1
85°	13.3
87.5°	3.9
90°	0.0

(END OF REPORT)