

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P210440

Luminaire Tested: **PR8R30D010 - PR8M34MDMMS - 3500K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P210440  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29049)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR8R30D010 - PR8M34MDMMS - 3500K  
Description: HALO 8" ROUND DOWNLIGHT, MEDIUM LENS, MATTE METALLIC SILVER FINISH  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3488.3 lumens  
Efficiency: N/A  
Efficacy: 122.4 lumens/watt  
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.13  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 28.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P210440

CATALOG NUMBER: PR8R30D010 - PR8M34MDMMS - 3500K

### Luminous Intensity Polar Plot

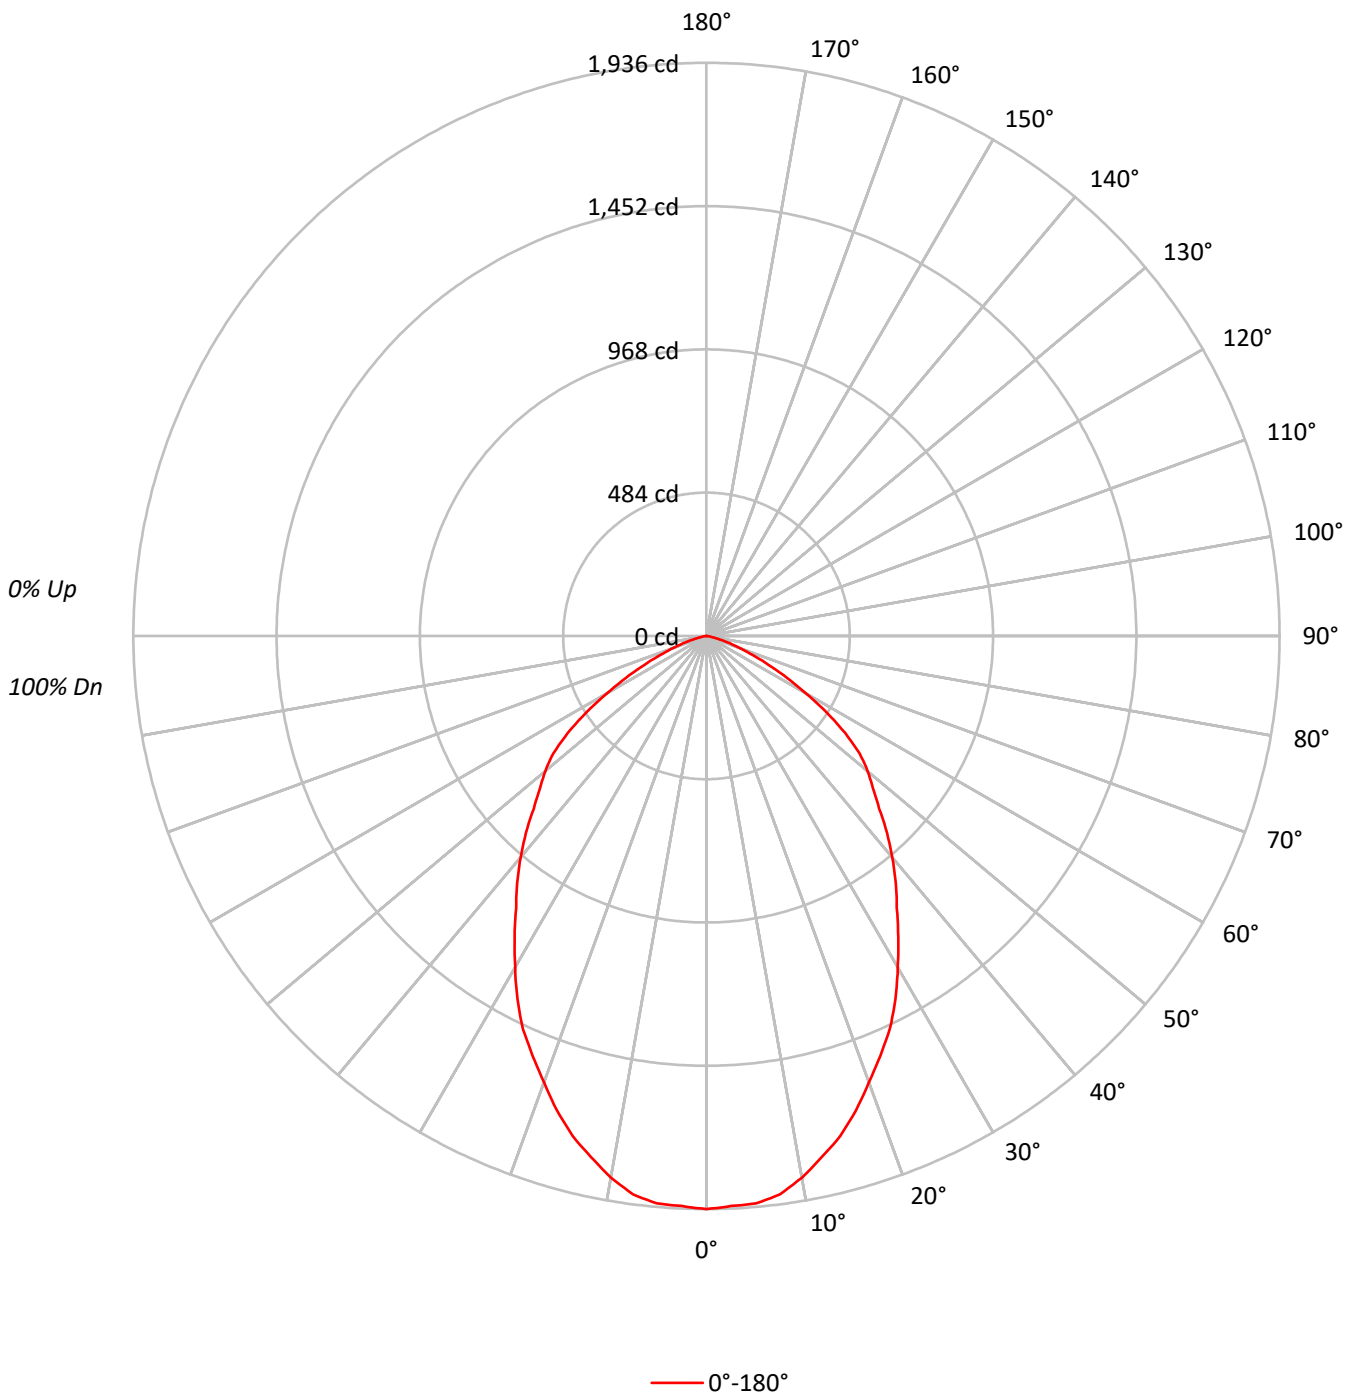



TEST NUMBER: P210440

CATALOG NUMBER: PR8R30D010 - PR8M34MDMMS - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  | 0   |     |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 111 | 107 | 104 | 101 | 109 | 105 | 102 | 99  | 101 | 99  | 96  |  | 97  | 95  | 93  |  | 94  | 92  | 91  | 89  |
| 2   | 103 | 96  | 91  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 83  |  | 88  | 84  | 81  |  | 85  | 82  | 79  | 77  |
| 3   | 95  | 86  | 79  | 74  | 93  | 85  | 78  | 73  | 82  | 76  | 72  |  | 79  | 75  | 71  |  | 77  | 73  | 70  | 68  |
| 4   | 88  | 78  | 70  | 64  | 86  | 76  | 69  | 64  | 74  | 68  | 63  |  | 72  | 66  | 62  |  | 70  | 65  | 61  | 59  |
| 5   | 82  | 70  | 62  | 57  | 80  | 69  | 62  | 56  | 67  | 61  | 56  |  | 65  | 60  | 55  |  | 64  | 59  | 55  | 53  |
| 6   | 76  | 64  | 56  | 50  | 74  | 63  | 56  | 50  | 61  | 55  | 50  |  | 60  | 54  | 49  |  | 58  | 53  | 49  | 47  |
| 7   | 71  | 59  | 51  | 45  | 69  | 58  | 50  | 45  | 56  | 50  | 45  |  | 55  | 49  | 44  |  | 54  | 48  | 44  | 42  |
| 8   | 66  | 54  | 46  | 41  | 65  | 53  | 46  | 41  | 52  | 45  | 40  |  | 51  | 45  | 40  |  | 50  | 44  | 40  | 38  |
| 9   | 62  | 50  | 42  | 37  | 61  | 49  | 42  | 37  | 48  | 42  | 37  |  | 47  | 41  | 37  |  | 46  | 41  | 37  | 35  |
| 10  | 58  | 46  | 39  | 34  | 57  | 46  | 39  | 34  | 45  | 38  | 34  |  | 44  | 38  | 34  |  | 43  | 38  | 34  | 32  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 59702 |
| 5°  | 59568 |
| 10° | 58171 |
| 15° | 55810 |
| 20° | 52642 |
| 25° | 49866 |
| 30° | 46025 |
| 35° | 42203 |
| 40° | 39300 |
| 45° | 35986 |
| 50° | 34104 |
| 55° | 30725 |
| 60° | 23997 |
| 65° | 16906 |
| 70° | 10657 |
| 75° | 5969  |
| 80° | 1669  |
| 85° | 0     |



TEST NUMBER: P210440

CATALOG NUMBER: PR8R30D010 - PR8M34MDMMS - 3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 181.6  | 5.2       |
| 10°-20°   | 489.8  | 14.0      |
| 20°-30°   | 670.7  | 19.2      |
| 30°-40°   | 704.6  | 20.2      |
| 40°-50°   | 642.6  | 18.4      |
| 50°-60°   | 503.0  | 14.4      |
| 60°-70°   | 236.2  | 6.8       |
| 70°-80°   | 58.3   | 1.7       |
| 80°-90°   | 1.5    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1342.1 | 38.5      |
| 0°-40°    | 2046.7 | 58.7      |
| 0°-60°    | 3192.3 | 91.5      |
| 0°-90°    | 3488.3 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 3488.3 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1936 |      |
| 5°  | 1924 | 182  |
| 15° | 1748 | 490  |
| 25° | 1466 | 671  |
| 35° | 1121 | 705  |
| 45° | 825  | 643  |
| 55° | 572  | 503  |
| 65° | 232  | 236  |
| 75° | 50   | 58   |
| 85° | 0    | 1    |
| 90° | 0    |      |



TEST NUMBER: P210440

CATALOG NUMBER: PR8R30D010 - PR8M34MDMMS - 3500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1936.1 |
| 2.5°  | 1927.5 |
| 5°    | 1924.4 |
| 7.5°  | 1902.5 |
| 10°   | 1857.8 |
| 12.5° | 1803.0 |
| 15°   | 1748.2 |
| 17.5° | 1680.1 |
| 20°   | 1604.2 |
| 22.5° | 1534.5 |
| 25°   | 1465.6 |
| 27.5° | 1383.4 |
| 30°   | 1292.6 |
| 32.5° | 1205.7 |
| 35°   | 1121.1 |
| 37.5° | 1049.9 |
| 40°   | 976.3  |
| 42.5° | 902.7  |
| 45°   | 825.2  |
| 47.5° | 762.6  |
| 50°   | 710.9  |
| 52.5° | 652.2  |
| 55°   | 571.5  |
| 57.5° | 481.5  |
| 60°   | 389.1  |
| 62.5° | 306.1  |
| 65°   | 231.7  |
| 67.5° | 167.5  |
| 70°   | 118.2  |
| 72.5° | 80.6   |
| 75°   | 50.1   |
| 77.5° | 27.4   |
| 80°   | 9.4    |
| 82.5° | 0.8    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)