

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P210524

Luminaire Tested: **PR8S15D010 - PR8M12MDMB - 3000K**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P210524
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29044)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: PR8S15D010 - PR8M12MDMB - 3000K
Description: HALO 8" ROUND DOWNLIGHT, MEDIUM LENS, MATTE BLACK FINISH
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1230.6 lumens
Efficiency: N/A
Efficacy: 82.0 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 15
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210524

CATALOG NUMBER: PR8S15D010 - PR8M12MDMB - 3000K

Luminous Intensity Polar Plot

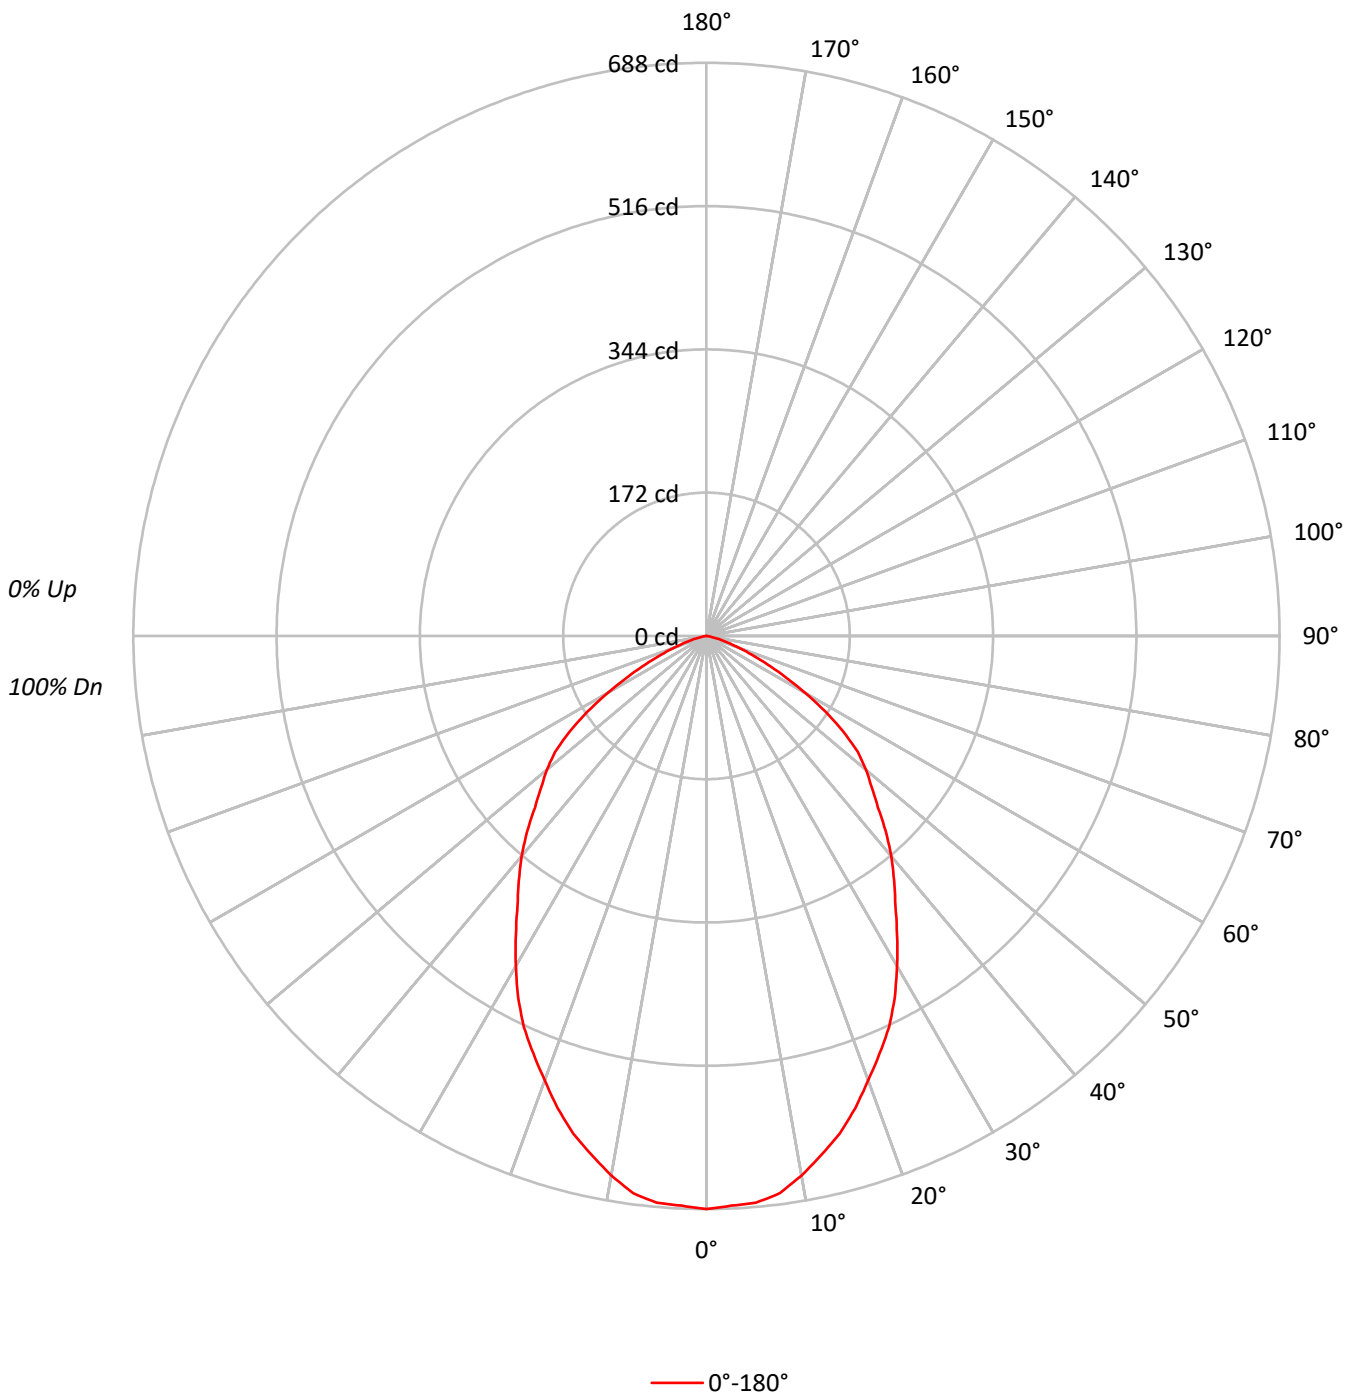



TEST NUMBER: P210524

CATALOG NUMBER: PR8S15D010 - PR8M12MDMB - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 111 | 107 | 104 | 101 | 109 | 105 | 102 | 99 | 101 | 99 | 96 | 97 | 95 | 93 | 94 | 92 | 91 | 89 |
| 2 | 103 | 96 | 91 | 86 | 100 | 94 | 89 | 85 | 91 | 87 | 83 | 88 | 84 | 81 | 85 | 82 | 79 | 77 |
| 3 | 95 | 86 | 79 | 74 | 93 | 85 | 78 | 73 | 82 | 76 | 72 | 79 | 75 | 71 | 77 | 73 | 70 | 68 |
| 4 | 88 | 78 | 70 | 64 | 86 | 76 | 69 | 64 | 74 | 68 | 63 | 72 | 67 | 62 | 70 | 65 | 61 | 60 |
| 5 | 82 | 70 | 62 | 57 | 80 | 69 | 62 | 56 | 67 | 61 | 56 | 65 | 60 | 55 | 64 | 59 | 55 | 53 |
| 6 | 76 | 64 | 56 | 50 | 74 | 63 | 56 | 50 | 61 | 55 | 50 | 60 | 54 | 49 | 58 | 53 | 49 | 47 |
| 7 | 71 | 59 | 51 | 45 | 69 | 58 | 50 | 45 | 56 | 50 | 45 | 55 | 49 | 44 | 54 | 48 | 44 | 42 |
| 8 | 66 | 54 | 46 | 41 | 65 | 53 | 46 | 41 | 52 | 45 | 41 | 51 | 45 | 40 | 50 | 44 | 40 | 38 |
| 9 | 62 | 50 | 42 | 37 | 61 | 49 | 42 | 37 | 48 | 42 | 37 | 47 | 41 | 37 | 46 | 41 | 37 | 35 |
| 10 | 59 | 46 | 39 | 34 | 57 | 46 | 39 | 34 | 45 | 38 | 34 | 44 | 38 | 34 | 43 | 38 | 34 | 32 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 21212 |
| 5° | 21142 |
| 10° | 20591 |
| 15° | 19742 |
| 20° | 18626 |
| 25° | 17638 |
| 30° | 16297 |
| 35° | 14881 |
| 40° | 13892 |
| 45° | 12690 |
| 50° | 11998 |
| 55° | 10806 |
| 60° | 8443 |
| 65° | 5881 |
| 70° | 3733 |
| 75° | 2109 |
| 80° | 586 |
| 85° | 0 |



TEST NUMBER: P210524

CATALOG NUMBER: PR8S15D010 - PR8M12MDMB - 3000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 64.4 | 5.2 |
| 10°-20° | 173.2 | 14.1 |
| 20°-30° | 237.2 | 19.3 |
| 30°-40° | 248.7 | 20.2 |
| 40°-50° | 226.7 | 18.4 |
| 50°-60° | 176.9 | 14.4 |
| 60°-70° | 82.3 | 6.7 |
| 70°-80° | 20.5 | 1.7 |
| 80°-90° | 0.6 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 474.9 | 38.6 |
| 0°-40° | 723.6 | 58.8 |
| 0°-60° | 1127.2 | 91.6 |
| 0°-90° | 1230.6 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1230.6 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 688 | |
| 5° | 683 | 64 |
| 15° | 618 | 173 |
| 25° | 518 | 237 |
| 35° | 395 | 249 |
| 45° | 291 | 227 |
| 55° | 201 | 177 |
| 65° | 81 | 82 |
| 75° | 18 | 21 |
| 85° | 0 | 1 |
| 90° | 0 | |



TEST NUMBER: P210524

CATALOG NUMBER: PR8S15D010 - PR8M12MDMB - 3000K

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 687.9 |
| 2.5° | 684.6 |
| 5° | 683.0 |
| 7.5° | 674.7 |
| 10° | 657.6 |
| 12.5° | 637.7 |
| 15° | 618.4 |
| 17.5° | 594.1 |
| 20° | 567.6 |
| 22.5° | 542.7 |
| 25° | 518.4 |
| 27.5° | 489.2 |
| 30° | 457.7 |
| 32.5° | 425.7 |
| 35° | 395.3 |
| 37.5° | 369.9 |
| 40° | 345.1 |
| 42.5° | 318.6 |
| 45° | 291.0 |
| 47.5° | 268.9 |
| 50° | 250.1 |
| 52.5° | 229.1 |
| 55° | 201.0 |
| 57.5° | 169.5 |
| 60° | 136.9 |
| 62.5° | 106.0 |
| 65° | 80.6 |
| 67.5° | 58.5 |
| 70° | 41.4 |
| 72.5° | 28.2 |
| 75° | 17.7 |
| 77.5° | 9.9 |
| 80° | 3.3 |
| 82.5° | 0.6 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)