

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P210634

Luminaire Tested: **PR8S40D010 - PR8M34MDMMS - 3000K**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P210634
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29049)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: PR8S40D010 - PR8M34MDMMS - 3000K
Description: HALO 8" ROUND DOWNLIGHT, MEDIUM LENS, MATTE METALLIC SILVER FINISH
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3572.4 lumens
Efficiency: N/A
Efficacy: 82.1 lumens/watt
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 43.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210634

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 3000K

Luminous Intensity Polar Plot

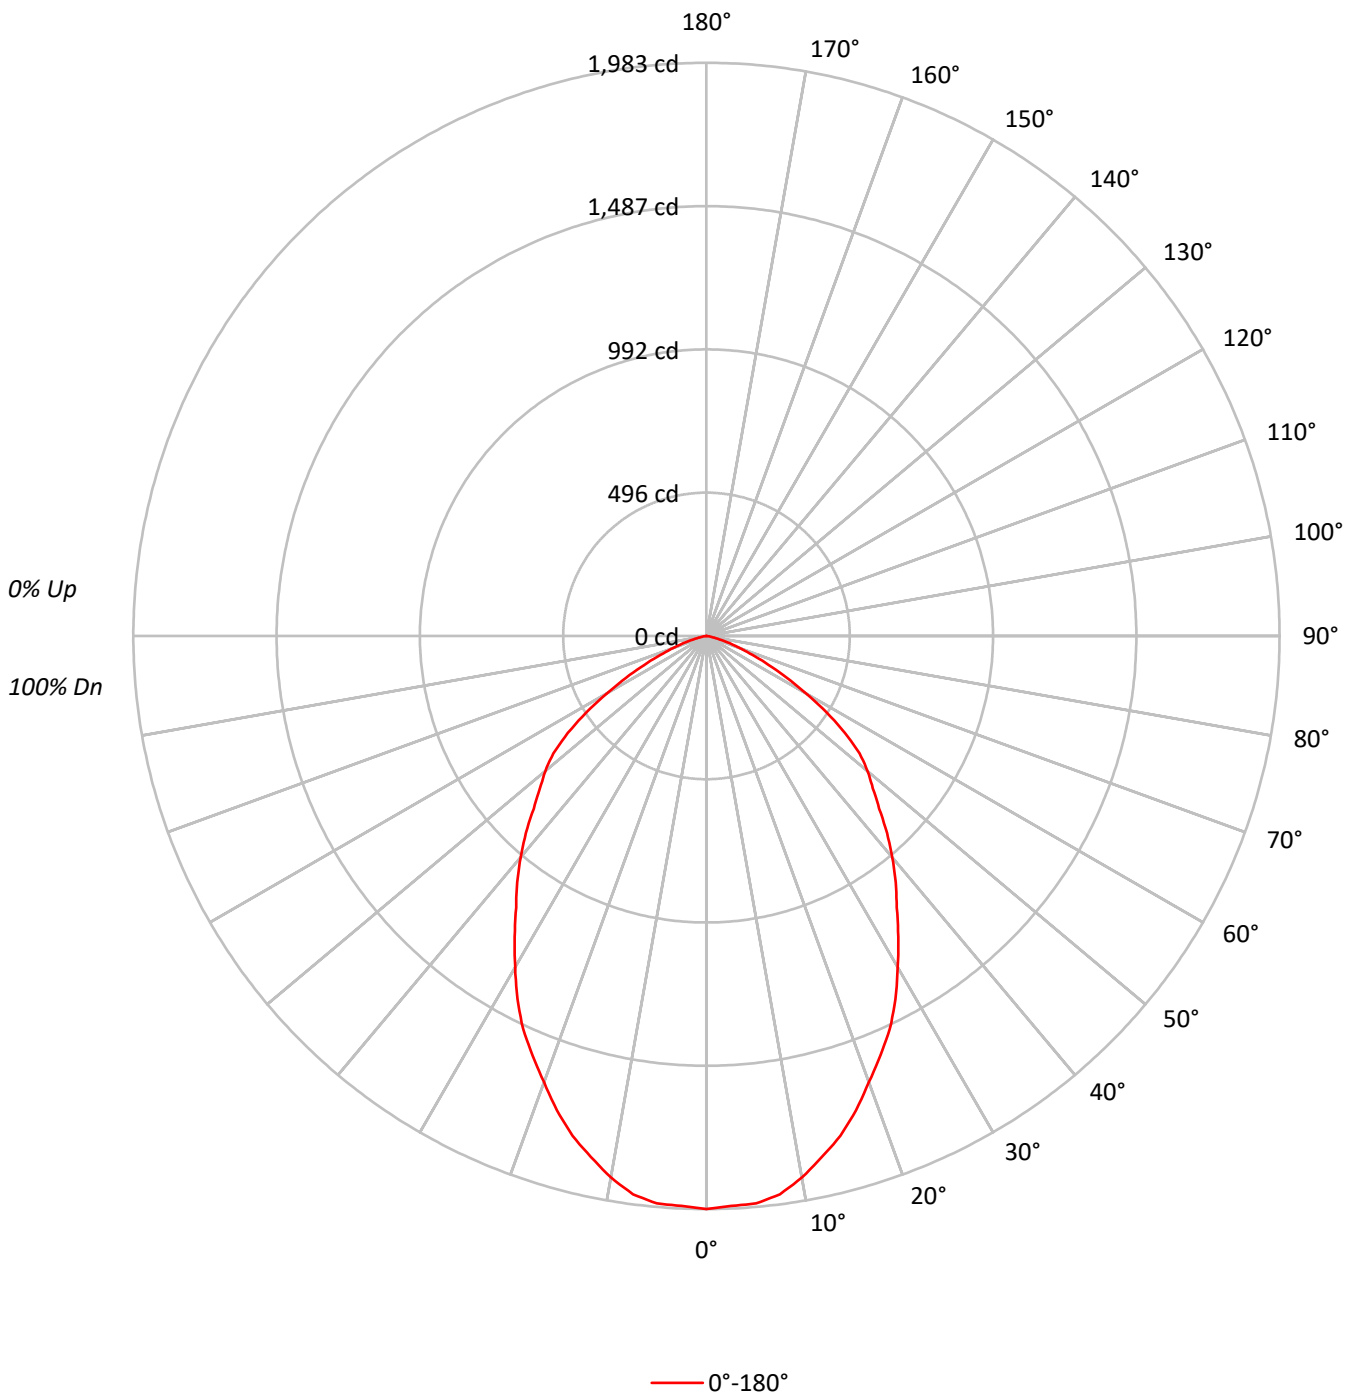



TEST NUMBER: P210634

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96		97	95	93		94	92	91	89
2	103	96	91	86	100	94	89	85	91	87	83		88	84	81		85	82	79	77
3	95	86	79	74	93	85	78	73	82	76	72		79	75	71		77	73	70	68
4	88	78	70	64	86	76	69	64	74	68	63		72	66	62		70	65	61	59
5	82	70	62	57	80	69	62	56	67	61	56		65	60	55		64	59	55	53
6	76	64	56	50	74	63	56	50	61	55	50		60	54	49		58	53	49	47
7	71	59	51	45	69	58	50	45	56	50	45		55	49	44		54	48	44	42
8	66	54	46	41	65	53	46	41	52	45	40		51	45	40		50	44	40	38
9	62	50	42	37	61	49	42	37	48	42	37		47	41	37		46	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34		44	38	34		43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	61142
5°	61004
10°	59574
15°	57157
20°	53909
25°	51067
30°	47133
35°	43219
40°	40246
45°	36854
50°	34924
55°	31467
60°	24577
65°	17315
70°	10918
75°	6112
80°	1705
85°	0



TEST NUMBER: P210634

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.0	5.2
10°-20°	501.6	14.0
20°-30°	686.8	19.2
30°-40°	721.6	20.2
40°-50°	658.1	18.4
50°-60°	515.1	14.4
60°-70°	242.0	6.8
70°-80°	59.7	1.7
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1374.4	38.5
0°-40°	2096.0	58.7
0°-60°	3269.2	91.5
0°-90°	3572.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3572.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1983	
5°	1971	186
15°	1790	502
25°	1501	687
35°	1148	722
45°	845	658
55°	585	515
65°	237	242
75°	51	60
85°	0	2
90°	0	



TEST NUMBER: P210634

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1982.8
2.5°	1974.0
5°	1970.8
7.5°	1948.3
10°	1902.6
12.5°	1846.5
15°	1790.4
17.5°	1720.6
20°	1642.8
22.5°	1571.5
25°	1500.9
27.5°	1416.7
30°	1323.7
32.5°	1234.7
35°	1148.1
37.5°	1075.2
40°	999.8
42.5°	924.4
45°	845.1
47.5°	780.9
50°	728.0
52.5°	667.9
55°	585.3
57.5°	493.1
60°	398.5
62.5°	313.5
65°	237.3
67.5°	171.6
70°	121.1
72.5°	82.6
75°	51.3
77.5°	28.1
80°	9.6
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)