

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P210636

Luminaire Tested: **PR8S40D010 - PR8M34MDMMS - 4000K**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P210636
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29049)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: PR8S40D010 - PR8M34MDMMS - 4000K
Description: HALO 8" ROUND DOWNLIGHT, MEDIUM LENS, MATTE METALLIC SILVER FINISH
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3748.9 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 43.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210636

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 4000K

Luminous Intensity Polar Plot

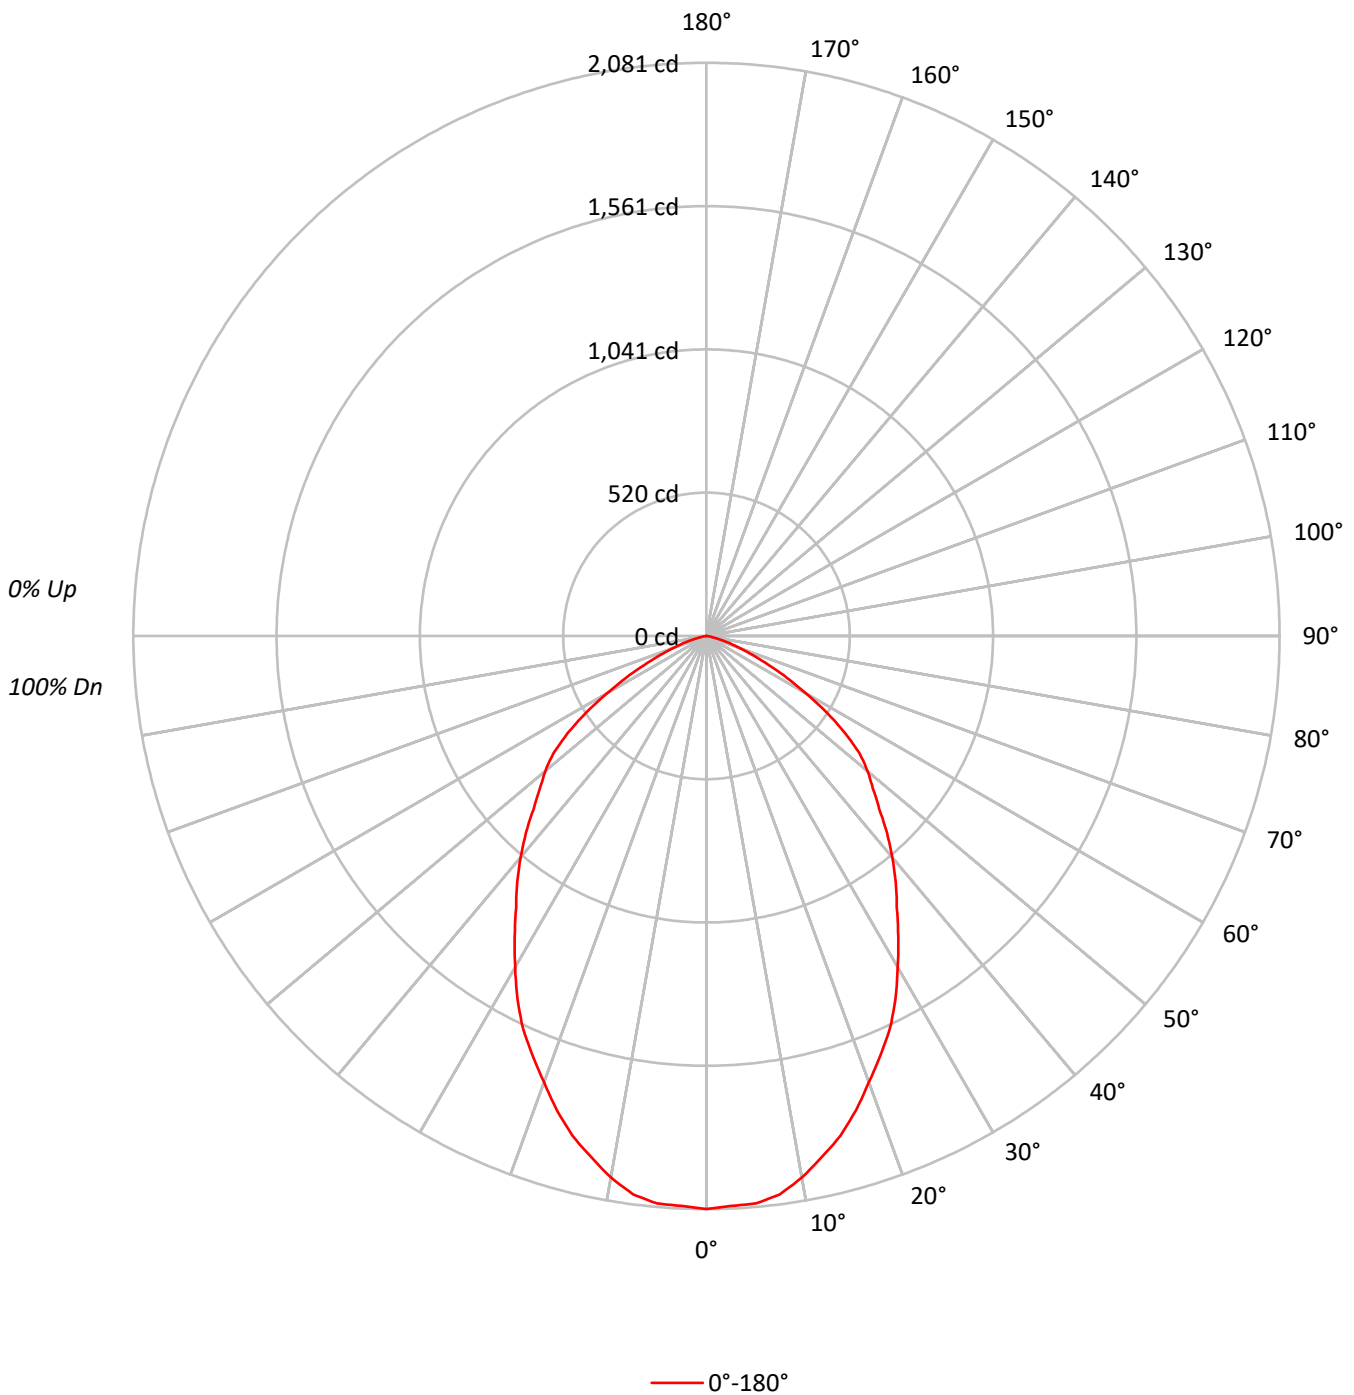



TEST NUMBER: P210636

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68
4	88	78	70	64	86	76	69	64	74	68	63	72	66	62	70	65	61	59
5	82	70	62	57	80	69	62	56	67	61	56	65	60	55	64	59	55	53
6	76	64	56	50	74	63	56	50	61	55	50	60	54	49	58	53	49	47
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	64161
5°	64016
10°	62518
15°	59979
20°	56574
25°	53591
30°	49461
35°	45357
40°	42234
45°	38673
50°	36651
55°	33020
60°	25791
65°	18176
70°	11450
75°	6410
80°	1794
85°	0



TEST NUMBER: P210636

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.2	5.2
10°-20°	526.4	14.0
20°-30°	720.8	19.2
30°-40°	757.2	20.2
40°-50°	690.6	18.4
50°-60°	540.6	14.4
60°-70°	253.9	6.8
70°-80°	62.6	1.7
80°-90°	1.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1442.3	38.5
0°-40°	2199.5	58.7
0°-60°	3430.7	91.5
0°-90°	3748.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3748.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2081	
5°	2068	195
15°	1879	526
25°	1575	721
35°	1205	757
45°	887	691
55°	614	541
65°	249	254
75°	54	63
85°	0	2
90°	0	



TEST NUMBER: P210636

CATALOG NUMBER: PR8S40D010 - PR8M34MDMMS - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2080.7
2.5°	2071.5
5°	2068.1
7.5°	2044.6
10°	1996.6
12.5°	1937.7
15°	1878.8
17.5°	1805.6
20°	1724.0
22.5°	1649.1
25°	1575.1
27.5°	1486.7
30°	1389.1
32.5°	1295.7
35°	1204.9
37.5°	1128.3
40°	1049.2
42.5°	970.1
45°	886.8
47.5°	819.5
50°	764.0
52.5°	700.9
55°	614.2
57.5°	517.5
60°	418.2
62.5°	329.0
65°	249.1
67.5°	180.1
70°	127.0
72.5°	86.7
75°	53.8
77.5°	29.4
80°	10.1
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)