

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P210656

Luminaire Tested: **PR8S40D010 - PR8M34WDMB - 4000K**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P210656  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29051)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: PR8S40D010 - PR8M34WDMB - 4000K  
Description: HALO 8" ROUND DOWNLIGHT, WIDE LENS, MATTE BLACK FINISH  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3518.2 lumens  
Efficiency: N/A  
Efficacy: 80.9 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.37 / 1.39  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 43.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P210656

CATALOG NUMBER: PR8S40D010 - PR8M34WDMB - 4000K

### Luminous Intensity Polar Plot

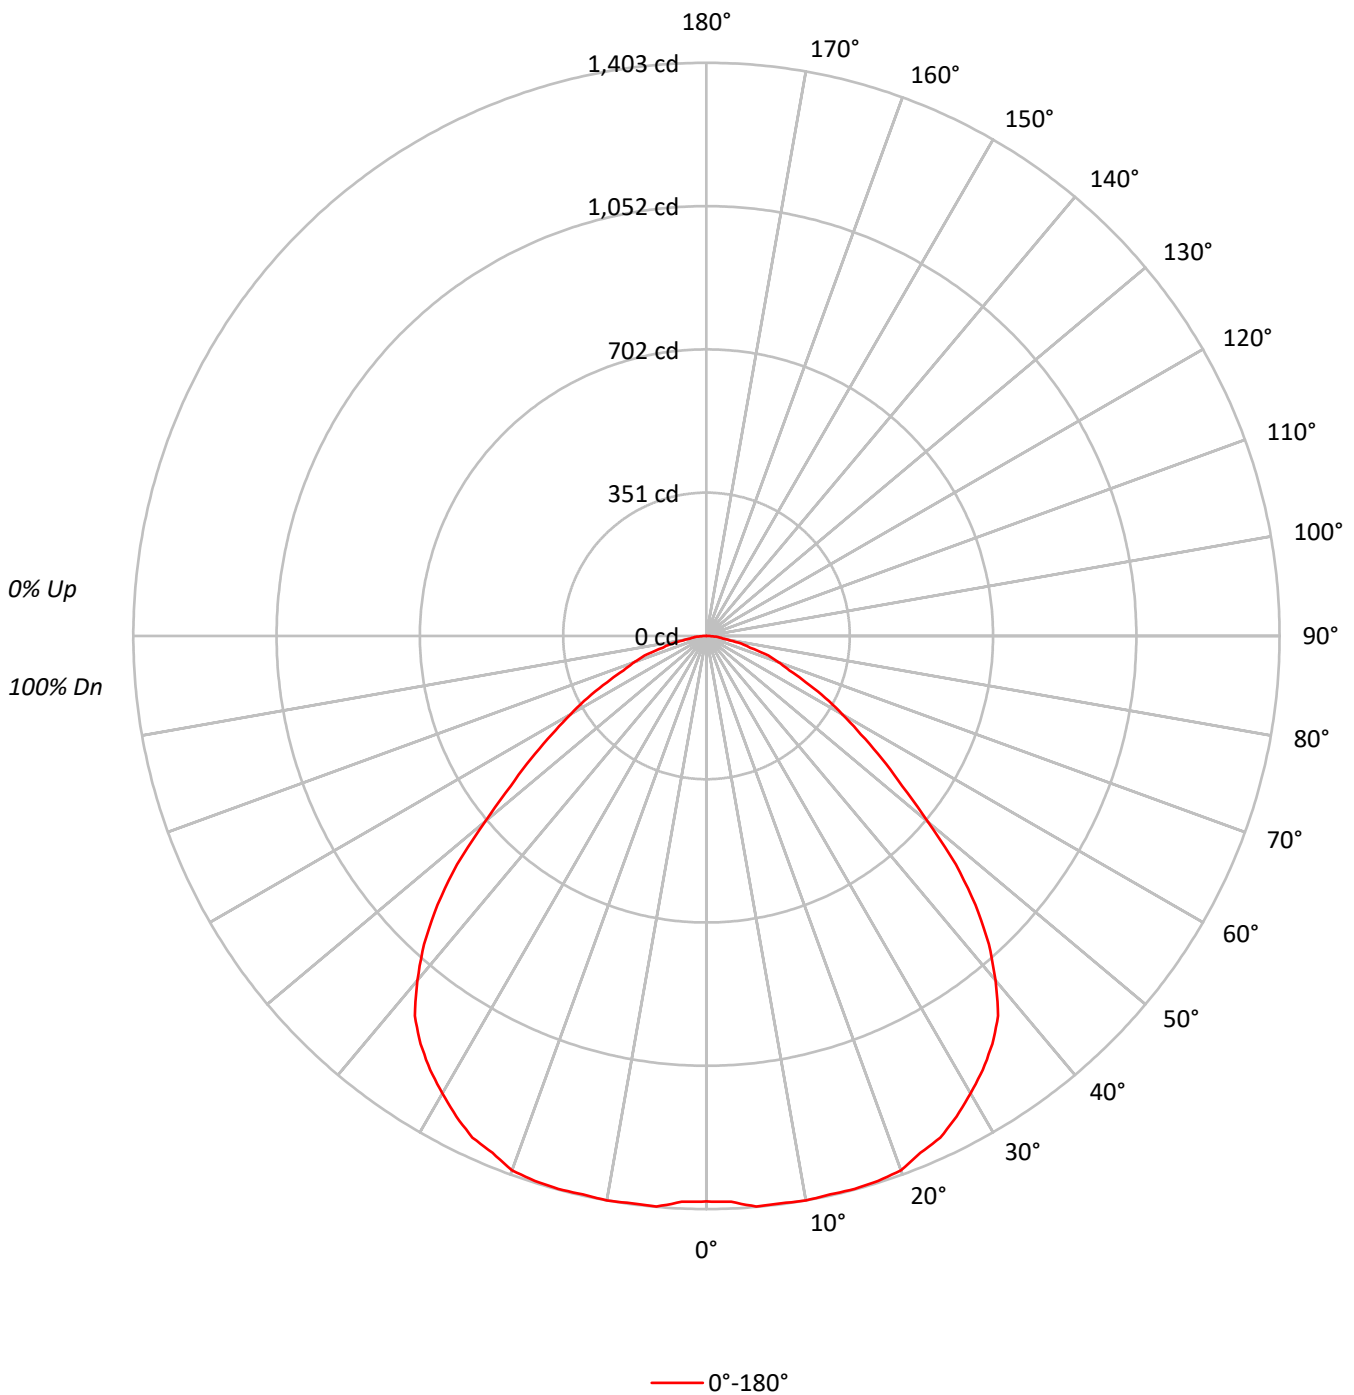



TEST NUMBER: P210656

CATALOG NUMBER: PR8S40D010 - PR8M34WDMB - 4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	92	91	89	87
2	102	94	88	83	99	92	87	82	89	84	80	86	82	79	83	80	77	75
3	93	84	77	71	91	82	76	70	79	74	69	77	72	68	74	70	67	65
4	86	75	67	61	84	74	66	61	71	65	60	69	64	59	67	62	58	56
5	80	68	59	53	78	67	59	53	64	58	52	63	57	52	61	56	51	49
6	74	61	53	47	72	60	52	47	59	52	46	57	51	46	55	50	46	44
7	68	56	48	42	67	55	47	42	53	46	41	52	46	41	51	45	41	39
8	64	51	43	37	62	50	43	37	49	42	37	48	42	37	47	41	37	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	37	33	31
10	56	43	36	31	55	43	36	31	42	35	31	41	35	30	40	34	30	29

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	42687
5°	43404
10°	43928
15°	44742
20°	45685
25°	46103
30°	46029
35°	45915
40°	44320
45°	40587
50°	33907
55°	28193
60°	23695
65°	19576
70°	16833
75°	13213
80°	9145
85°	9624



TEST NUMBER: P210656

CATALOG NUMBER: PR8S40D010 - PR8M34WDMB - 4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	133.6	3.8
10°-20°	396.6	11.3
20°-30°	622.8	17.7
30°-40°	759.1	21.6
40°-50°	709.5	20.2
50°-60°	473.3	13.5
60°-70°	272.3	7.7
70°-80°	125.6	3.6
80°-90°	25.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1152.9	32.8
0°-40°	1912.1	54.3
0°-60°	3094.9	88.0
0°-90°	3518.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3518.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1384	
5°	1402	134
15°	1402	397
25°	1355	623
35°	1220	759
45°	931	710
55°	524	473
65°	268	272
75°	111	126
85°	27	26
90°	0	



TEST NUMBER: P210656

CATALOG NUMBER: PR8S40D010 - PR8M34WDMB - 4000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1384.3
2.5°	1386.4
5°	1402.2
7.5°	1400.7
10°	1402.9
12.5°	1400.0
15°	1401.5
17.5°	1398.6
20°	1392.2
22.5°	1369.3
25°	1355.0
27.5°	1326.3
30°	1292.7
32.5°	1259.1
35°	1219.7
37.5°	1172.5
40°	1101.0
42.5°	1023.0
45°	930.7
47.5°	828.4
50°	706.8
52.5°	603.8
55°	524.4
57.5°	448.6
60°	384.2
62.5°	328.4
65°	268.3
67.5°	220.3
70°	186.7
72.5°	158.8
75°	110.9
77.5°	88.0
80°	51.5
82.5°	32.9
85°	27.2
87.5°	7.9
90°	0.0

(END OF REPORT)