

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885624

Luminaire Tested: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMBB-340LM-3000K

Issue Date: 7/18/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P885624  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-123)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 7/18/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMBB-340LM-3000K  
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, MATTE BLACK BAFFLED TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 237.2 lumens  
Efficiency: N/A  
Efficacy: 38.9 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.45  
Luminous Opening: Circular (Dia: 0.08' x H: 0')  
CIE Type: Direct

Input Watts (W): 6.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P885624  
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMBB-340LM-3000K

### Luminous Intensity Polar Plot

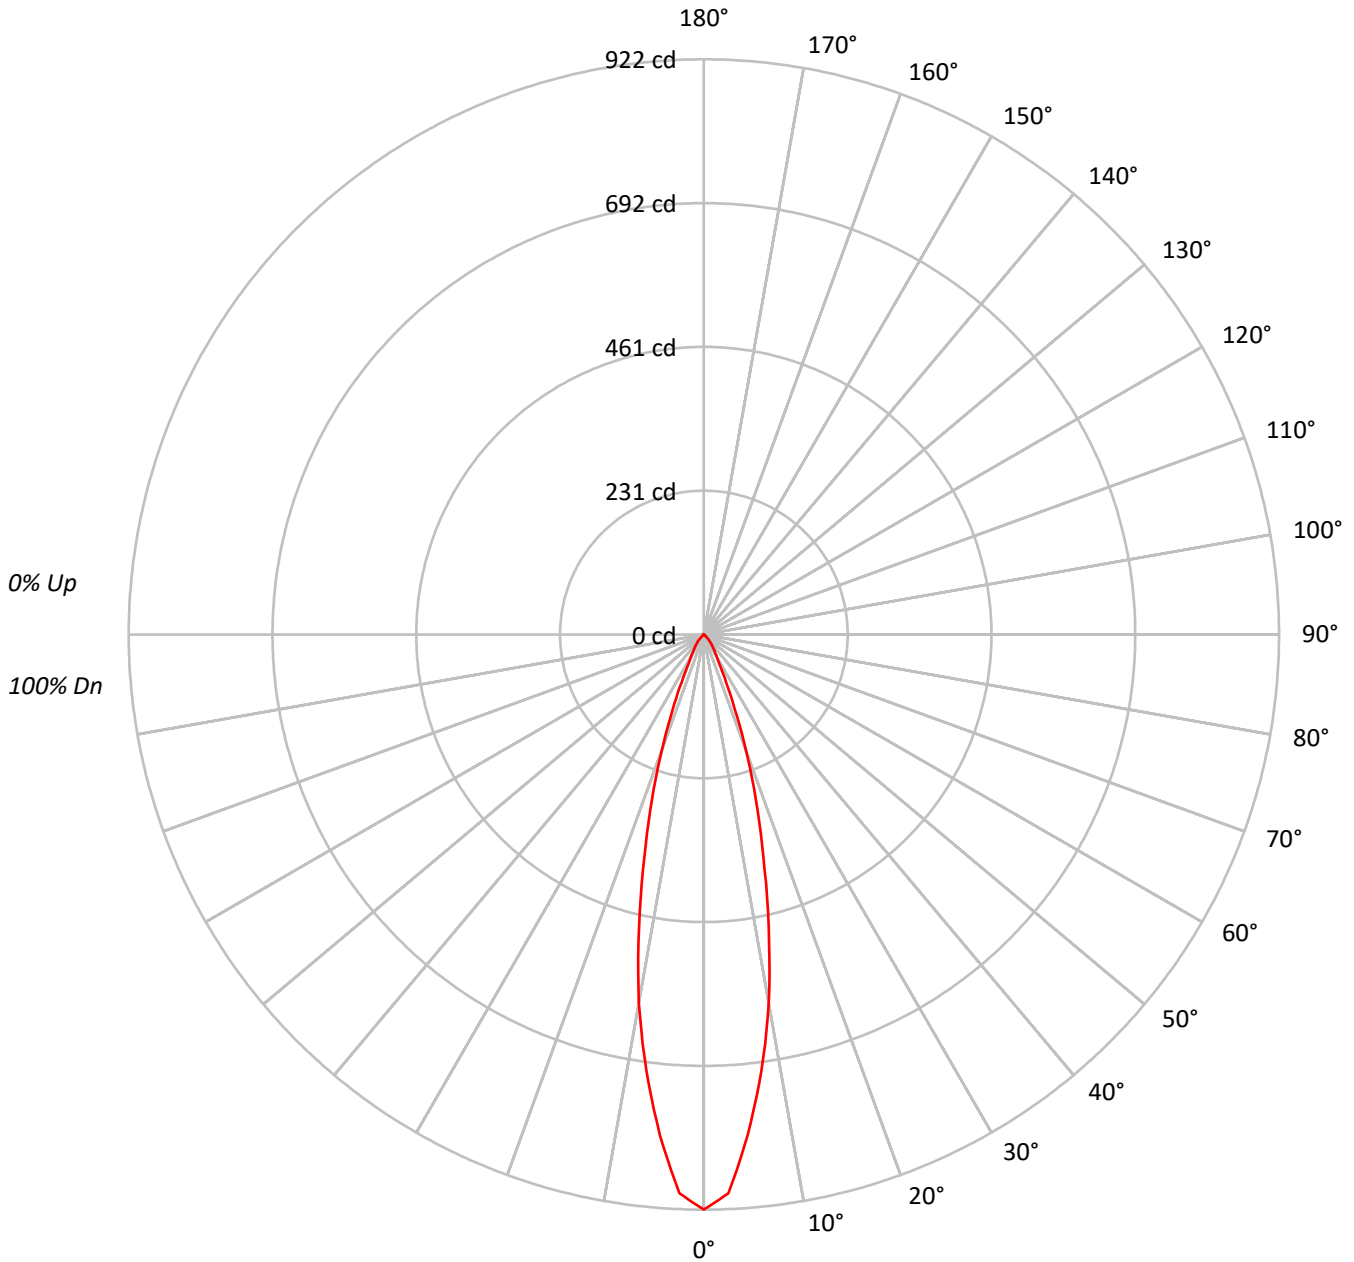



TEST NUMBER: P885624

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMMB-340LM-3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	92			
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	94	92	90	89			
4	103	97	93	90	101	96	92	89	94	91	88	92	90	87	91	88	86	85			
5	100	93	89	86	98	92	88	85	91	87	84	89	86	84	88	85	83	82			
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79			
7	93	86	82	79	92	86	81	78	85	81	78	83	80	78	83	80	77	76			
8	90	83	79	76	89	83	78	76	82	78	75	81	77	75	80	77	75	74			
9	88	80	76	73	87	80	76	73	79	75	73	78	75	72	78	75	72	71			
10	85	78	73	71	84	77	73	71	77	73	70	76	73	70	75	72	70	69			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1819211
5°	1596355
10°	1202192
15°	749636
20°	410799
25°	181391
30°	91610
35°	60954
40°	40963
45°	13118
50°	5834
55°	3097
60°	3552
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13118 cd/sqm



TEST NUMBER: P885624

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMBB-340LM-3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	70.5	29.7
10°-20°	101.8	42.9
20°-30°	42.6	18.0
30°-40°	16.3	6.9
40°-50°	5.0	2.1
50°-60°	0.9	0.4
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	214.9	90.6
0°-40°	231.2	97.5
0°-60°	237.1	100.0
0°-90°	237.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	237.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	922	
5°	806	70
15°	367	102
25°	83	43
35°	25	16
45°	5	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885624

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMBB-340LM-3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	921.8
2.5°	896.6
5°	805.8
7.5°	705.7
10°	599.9
12.5°	479.2
15°	366.9
17.5°	275.1
20°	195.6
22.5°	130.1
25°	83.3
27.5°	55.2
30°	40.2
32.5°	31.8
35°	25.3
37.5°	20.6
40°	15.9
42.5°	11.2
45°	4.7
47.5°	1.9
50°	1.9
52.5°	0.9
55°	0.9
57.5°	0.9
60°	0.9
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)