

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885633

Luminaire Tested: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMWB-340LM-2700K

Issue Date: 7/18/2024

Test Information

Test Method: LM-79-2019
Report Number: P885633
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-121)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/18/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMWB-340LM-2700K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, MATTE WHITE BAFFLED TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 292.4 lumens
Efficiency: N/A
Efficacy: 47.9 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.48
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 6.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885633
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMWB-340LM-2700K

Luminous Intensity Polar Plot

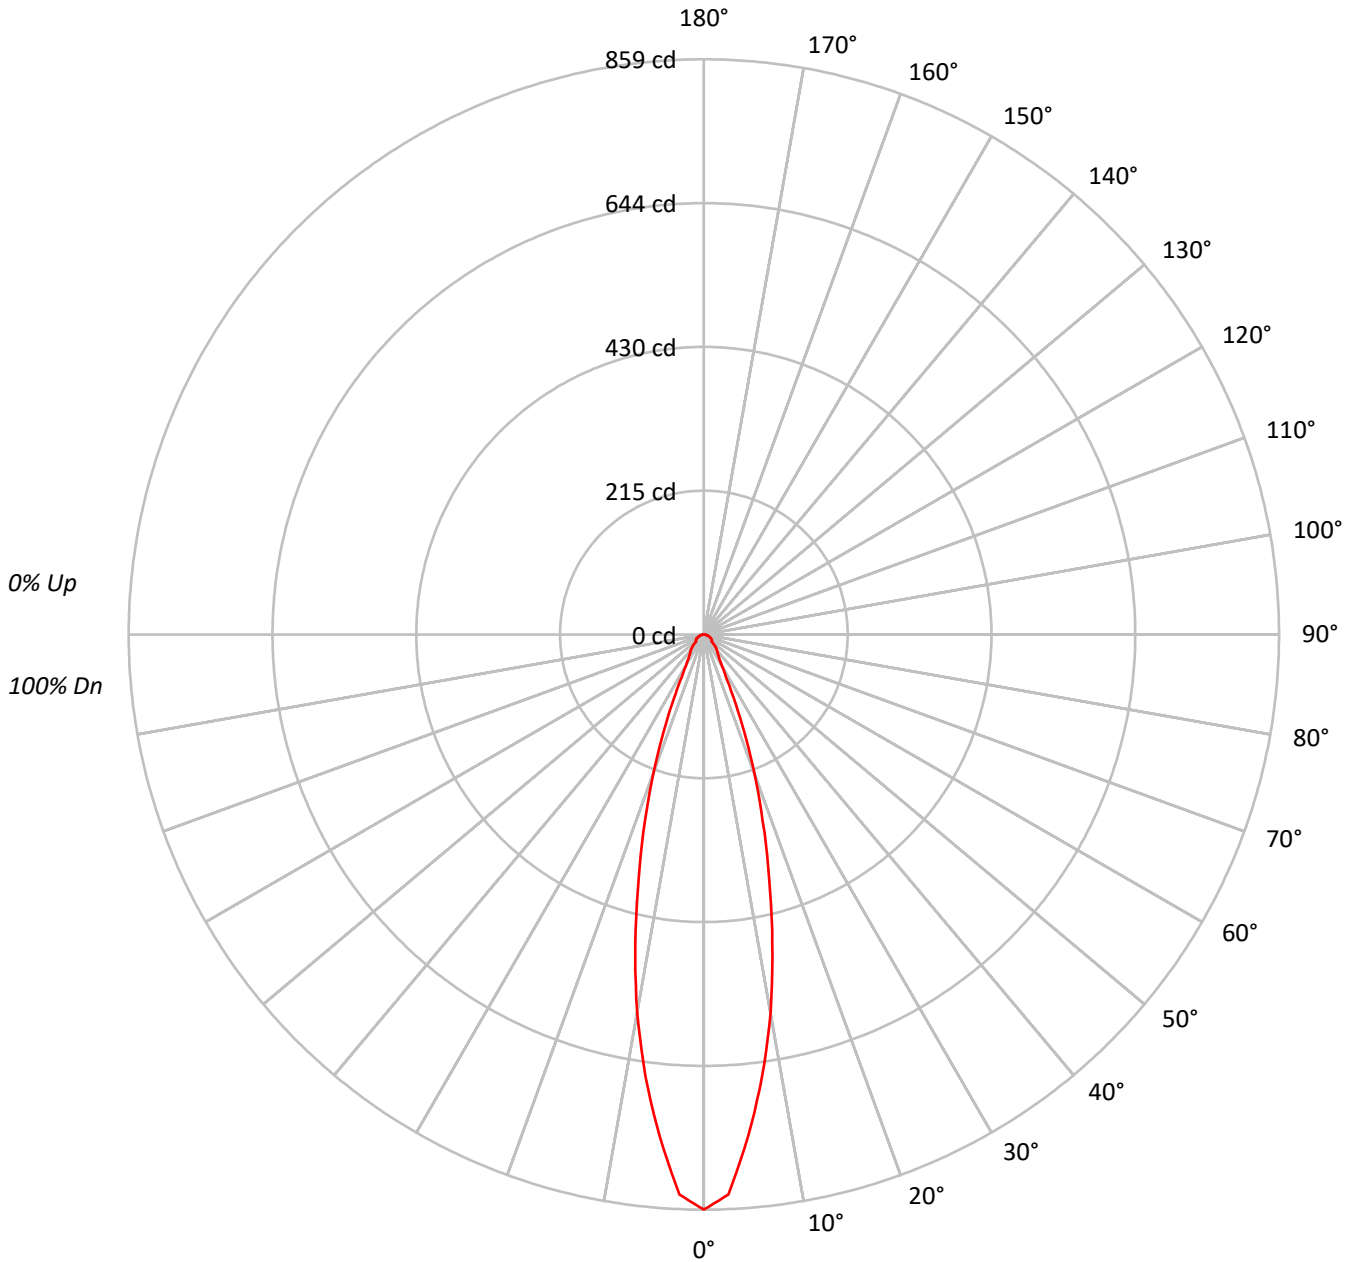



TEST NUMBER: P885633
 CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMWB-340LM-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93				93															
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86				86															
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	87	85	83	81				81															
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76				76															
5	94	86	80	76	92	85	80	76	83	78	75	81	77	74	80	76	74	72				72															
6	90	81	76	72	88	81	75	71	79	74	71	78	74	71	76	73	70	69				69															
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66				66															
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63				63															
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60				60															
10	77	68	63	60	76	68	63	60	67	63	59	66	62	59	66	62	59	58				58															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1694878
5°	1492744
10°	1149086
15°	767003
20°	461204
25°	229297
30°	121007
35°	88901
40°	76515
45°	62798
50°	46975
55°	49547
60°	49733
65°	46231
70°	41546
75°	41176
80°	30686
85°	20379

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 62798 cd/sqm



TEST NUMBER: P885633

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMWB-340LM-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.4	22.7
10°-20°	103.8	35.5
20°-30°	52.0	17.8
30°-40°	24.0	8.2
40°-50°	16.7	5.7
50°-60°	12.8	4.4
60°-70°	10.0	3.4
70°-80°	5.3	1.8
80°-90°	1.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	222.2	76.0
0°-40°	246.2	84.2
0°-60°	275.7	94.3
0°-90°	292.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	292.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	859	
5°	754	66
15°	375	104
25°	105	52
35°	37	24
45°	22	17
55°	14	13
65°	10	10
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P885633

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D25NFL-TL1RDMWB-340LM-2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	858.8
2.5°	837.2
5°	753.5
7.5°	666.1
10°	573.4
12.5°	472.6
15°	375.4
17.5°	292.6
20°	219.6
22.5°	156.6
25°	105.3
27.5°	71.1
30°	53.1
32.5°	43.2
35°	36.9
37.5°	33.3
40°	29.7
42.5°	26.1
45°	22.5
47.5°	16.2
50°	15.3
52.5°	15.3
55°	14.4
57.5°	13.5
60°	12.6
62.5°	11.7
65°	9.9
67.5°	9.0
70°	7.2
72.5°	6.3
75°	5.4
77.5°	3.6
80°	2.7
82.5°	1.8
85°	0.9
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)