

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885680

Luminaire Tested: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-3500K

Issue Date: 6/19/2024

Test Information

Test Method: LM-79-2019
Report Number: P885680
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-126)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-3500K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, MATTE BLACK TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 372.4 lumens
Efficiency: N/A
Efficacy: 61.0 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.65
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 6.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885680
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-3500K

Luminous Intensity Polar Plot

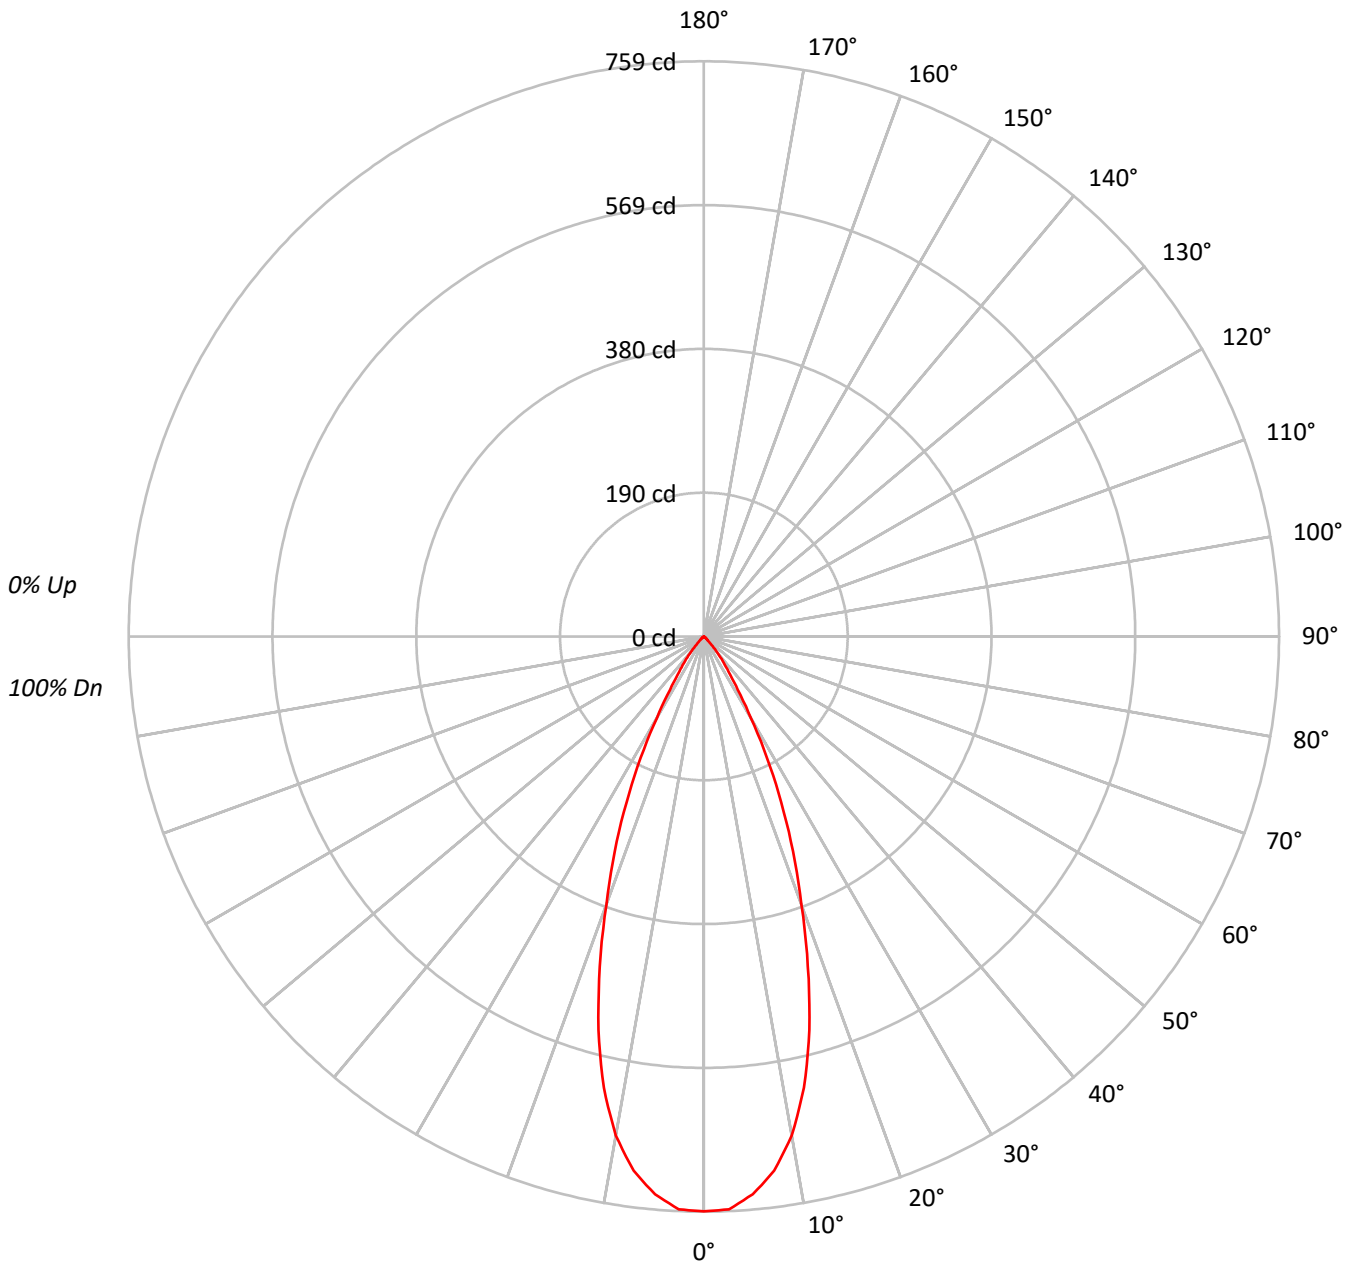



TEST NUMBER: P885680

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDDB-340LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	108	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	95	92	103	98	94	91	96	93	90	93	91	88	91	89	87	86	86	86	86
4	101	94	90	86	99	93	89	86	91	88	85	89	86	84	88	85	83	81	81	81	81
5	97	90	85	81	95	89	84	81	87	83	80	86	82	79	84	81	79	77	77	77	77
6	93	85	80	77	92	85	80	76	83	79	76	82	78	75	81	77	75	74	74	74	74
7	89	81	76	73	88	81	76	73	80	75	72	79	75	72	77	74	72	70	70	70	70
8	86	78	73	69	85	77	72	69	76	72	69	75	71	69	74	71	68	67	67	67	67
9	83	74	69	66	82	74	69	66	73	69	66	72	68	66	72	68	65	64	64	64	64
10	80	71	66	63	79	71	66	63	70	66	63	70	66	63	69	65	63	61	61	61	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1497129
5°	1463622
10°	1339665
15°	1098608
20°	790305
25°	526099
30°	282122
35°	135882
40°	68787
45°	19258
50°	9211
55°	3441
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19258 cd/sqm



TEST NUMBER: P885680

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.3	18.4
10°-20°	146.4	39.3
20°-30°	109.8	29.5
30°-40°	39.0	10.5
40°-50°	7.8	2.1
50°-60°	1.0	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	324.6	87.2
0°-40°	363.6	97.6
0°-60°	372.4	100.0
0°-90°	372.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	372.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	759	
5°	739	68
15°	538	146
25°	242	110
35°	56	39
45°	7	8
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885680

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	758.6
2.5°	756.6
5°	738.8
7.5°	711.0
10°	668.5
12.5°	610.0
15°	537.7
17.5°	456.5
20°	376.3
22.5°	307.0
25°	241.6
27.5°	180.2
30°	123.8
32.5°	83.2
35°	56.4
37.5°	40.6
40°	26.7
42.5°	14.9
45°	6.9
47.5°	5.0
50°	3.0
52.5°	2.0
55°	1.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)