

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885682

Luminaire Tested: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-5000K

Issue Date: 6/19/2024

Test Information

Test Method: LM-79-2019
Report Number: P885682
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-126)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-5000K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, MATTE BLACK TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 440.5 lumens
Efficiency: N/A
Efficacy: 72.2 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.65
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 6.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885682
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-5000K

Luminous Intensity Polar Plot

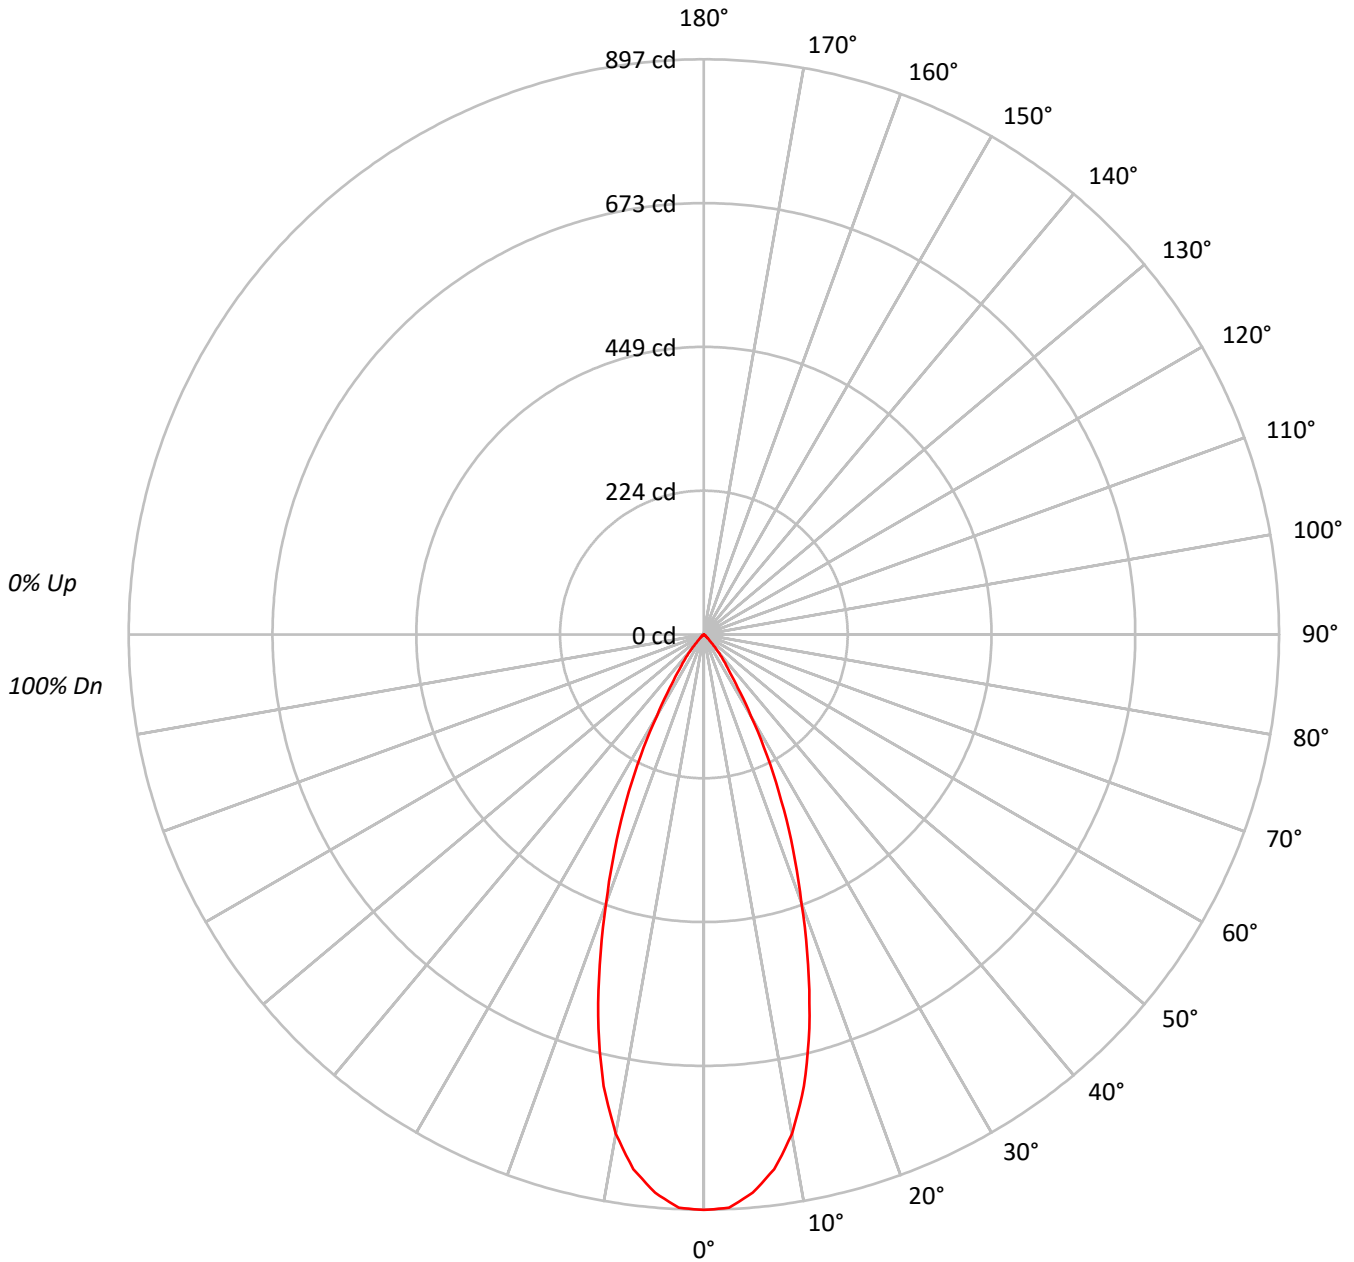



TEST NUMBER: P885682

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDDB-340LM-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	105	102	99	108	104	101	98	101	98	96	98	96	94	95	93	92	90		
3	105	100	95	92	103	98	94	91	96	93	90	93	91	88	91	89	87	86		
4	101	94	90	86	99	93	89	86	91	88	85	89	86	84	88	85	83	81		
5	97	90	85	81	95	89	84	81	87	83	80	86	82	79	84	81	79	77		
6	93	85	80	77	92	85	80	76	83	79	76	82	78	75	81	77	75	74		
7	89	81	76	73	88	81	76	73	80	75	72	79	75	72	77	74	72	70		
8	86	78	73	69	85	77	72	69	76	72	69	75	71	69	74	71	68	67		
9	83	74	69	66	82	74	69	66	73	69	66	72	68	66	72	68	65	64		
10	80	71	66	63	79	71	66	63	70	66	63	70	66	63	69	65	63	61		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1770859
5°	1731068
10°	1584552
15°	1299450
20°	934799
25°	622347
30°	333624
35°	160938
40°	81410
45°	22886
50°	10746
55°	4129
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22886 cd/sqm



TEST NUMBER: P885682

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.8	18.4
10°-20°	173.2	39.3
20°-30°	129.9	29.5
30°-40°	46.1	10.5
40°-50°	9.3	2.1
50°-60°	1.1	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	383.9	87.2
0°-40°	430.1	97.6
0°-60°	440.5	100.0
0°-90°	440.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	440.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	897	
5°	874	81
15°	636	173
25°	286	130
35°	67	46
45°	8	9
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885682

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D40FL-TL1RDMB-340LM-5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	897.3
2.5°	894.9
5°	873.8
7.5°	841.0
10°	790.7
12.5°	721.6
15°	636.0
17.5°	540.0
20°	445.1
22.5°	363.1
25°	285.8
27.5°	213.2
30°	146.4
32.5°	98.4
35°	66.8
37.5°	48.0
40°	31.6
42.5°	17.6
45°	8.2
47.5°	5.9
50°	3.5
52.5°	2.3
55°	1.2
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)