

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885744

Luminaire Tested: ML104LSFL95FS1E-TIR1D55WFL-TL1RDMBB-340LM-3000K

Issue Date: 6/19/2024

Test Information

Test Method: LM-79-2019
Report Number: P885744
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-135)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFL95FS1E-TIR1D55WFL-TL1RDMBB-340LM-3000K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE BLACK BAFFLED TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 341.4 lumens
Efficiency: N/A
Efficacy: 56.0 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.78
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 6.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885744
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDMMB-340LM-3000K

Luminous Intensity Polar Plot

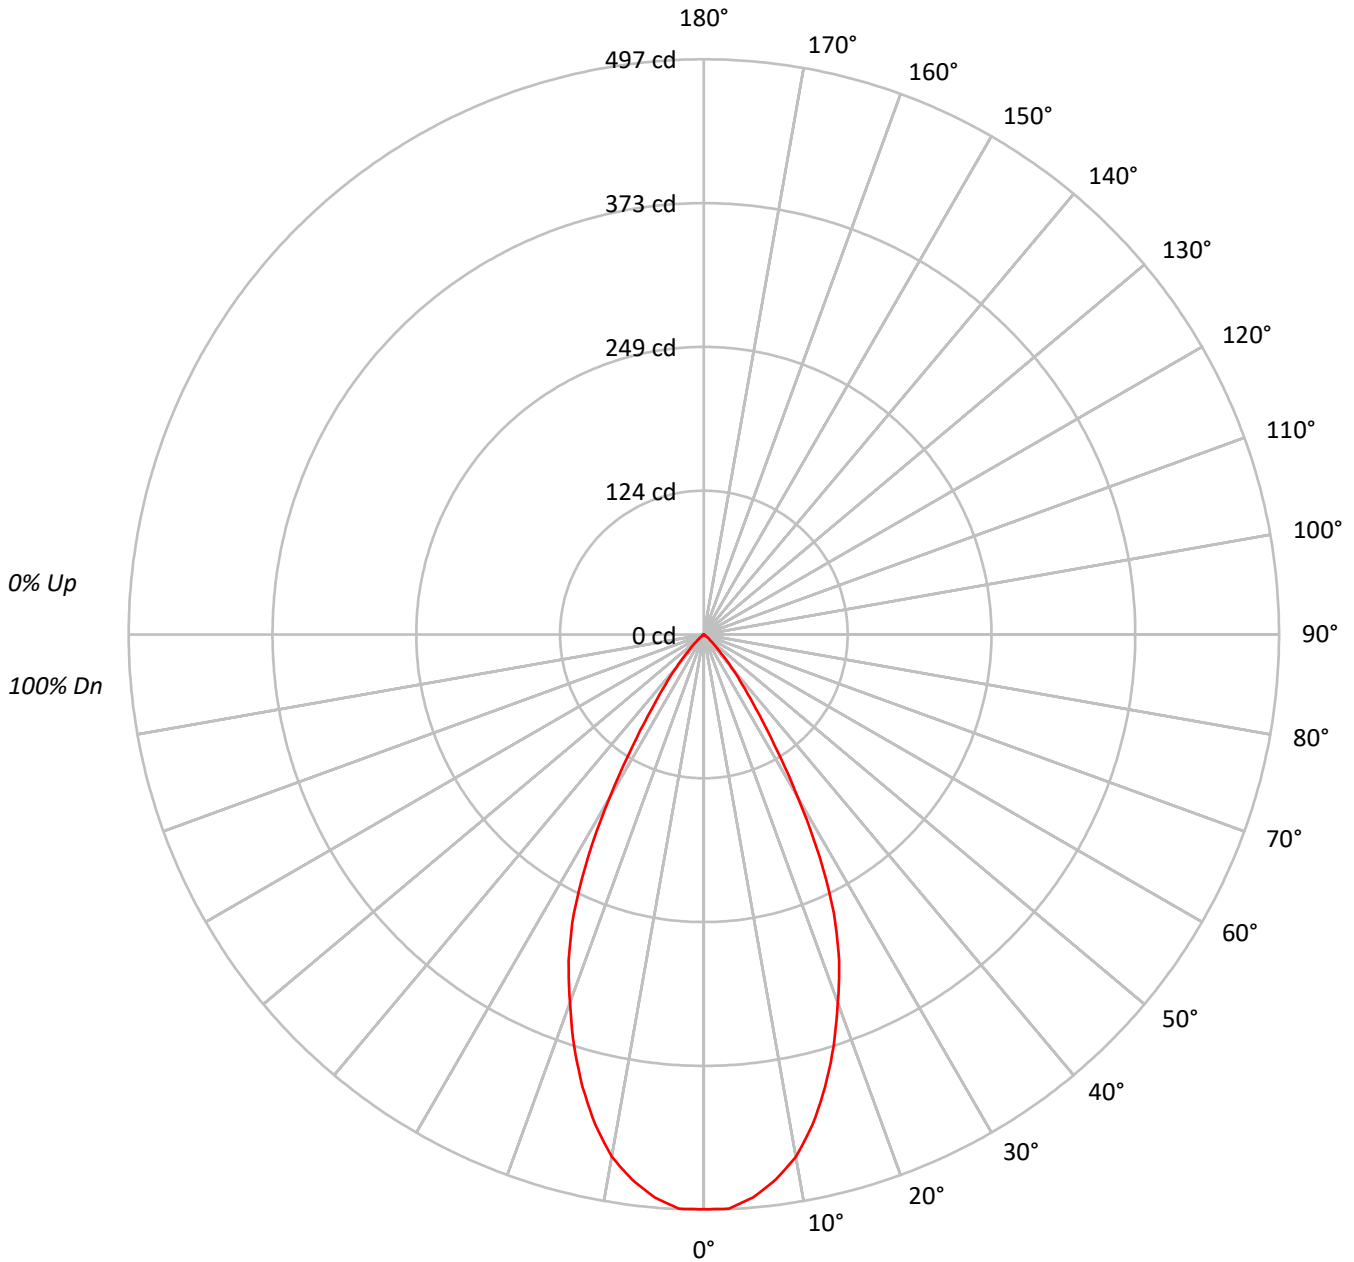



TEST NUMBER: P885744

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDMBB-340LM-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	104	102	101	100	99	98	97	96	94			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89			
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	90	82	77	73	89	81	76	72	80	75	72	79	75	71	77	74	71	70			
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66			
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	62			
9	79	70	65	61	78	70	64	61	69	64	61	68	64	60	67	63	60	59			
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	980061
5°	967163
10°	918227
15°	827072
20°	710497
25°	579449
30°	369402
35°	187440
40°	94034
45°	36562
50°	11360
55°	3097
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 36562 cd/sqm



TEST NUMBER: P885744

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDMBB-340LM-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.6	13.4
10°-20°	112.3	32.9
20°-30°	117.7	34.5
30°-40°	52.8	15.5
40°-50°	11.9	3.5
50°-60°	1.0	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	275.7	80.8
0°-40°	328.5	96.2
0°-60°	341.4	100.0
0°-90°	341.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	341.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	497	
5°	488	46
15°	405	112
25°	266	118
35°	78	53
45°	13	12
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885744

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDMBB-340LM-3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	496.6
2.5°	496.6
5°	488.2
7.5°	475.1
10°	458.2
12.5°	433.8
15°	404.8
17.5°	372.9
20°	338.3
22.5°	305.5
25°	266.1
27.5°	216.4
30°	162.1
32.5°	114.3
35°	77.8
37.5°	54.3
40°	36.5
42.5°	22.5
45°	13.1
47.5°	7.5
50°	3.7
52.5°	1.9
55°	0.9
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)