

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885763

Luminaire Tested: ML104LSFL95FS1E-TIR1D55WFL-TL1RDSL B-340LM-2700K

Issue Date: 6/19/2024


**Test Information**

Test Method: LM-79-2019  
Report Number: P885763  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-134)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 6/19/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML104LSFL95FS1E-TIR1D55WFL-TL1RDSL B-340LM-2700K  
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, METALLIC SILVER BAFFLED TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 350.8 lumens  
Efficiency: N/A  
Efficacy: 57.5 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.79  
Luminous Opening: Circular (Dia: 0.08' x H: 0')  
CIE Type: Direct


Input Watts (W): 6.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

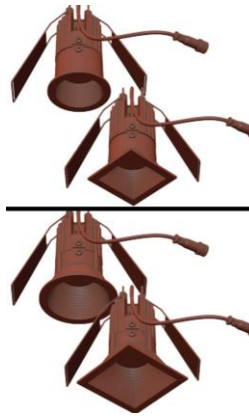

TEST NUMBER: P885763

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDSL B-340LM-2700K

### Luminous Intensity Polar Plot

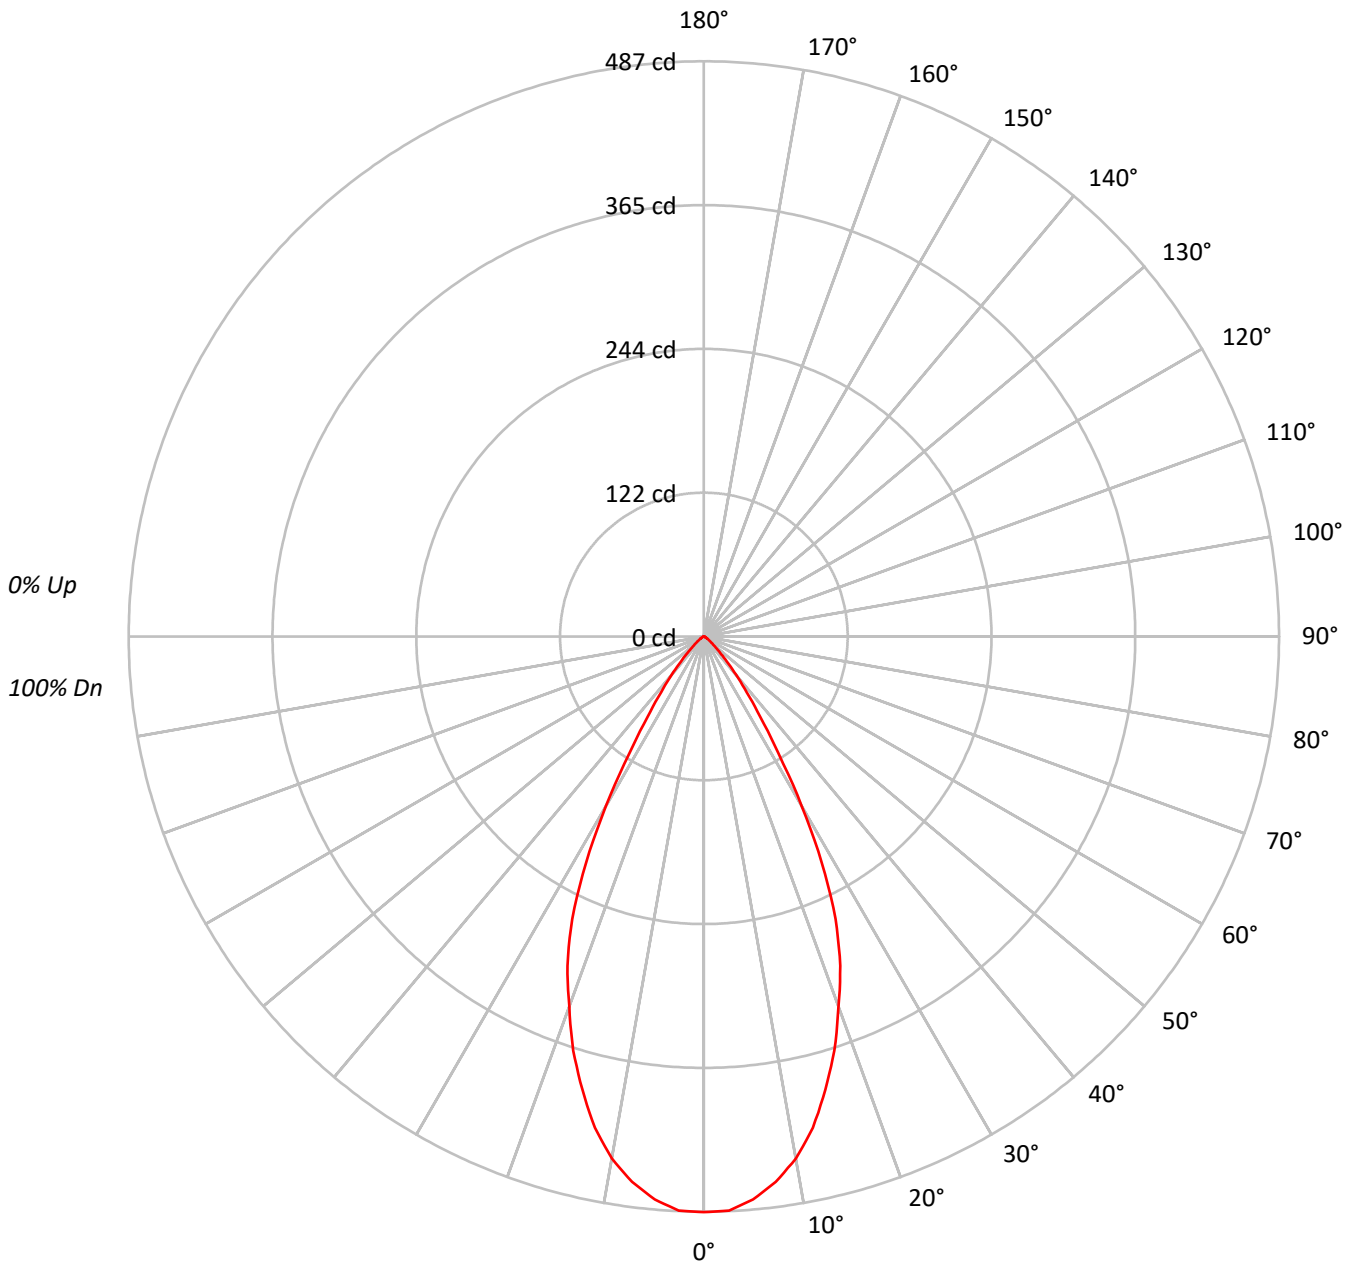



TEST NUMBER: P885763

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDSL B-340LM-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	97	106	102	98	95	99	96	93	96	93	91	93	91	90	88			
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	88	86	84	82			
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77			
5	94	86	80	76	92	85	80	76	83	79	75	81	77	74	80	76	74	72			
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68			
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64			
8	81	72	67	63	80	72	66	63	71	66	62	70	65	62	69	65	62	60			
9	78	69	63	59	77	68	63	59	67	62	59	66	62	59	65	61	58	57			
10	74	65	60	56	73	65	59	56	64	59	56	63	59	56	62	58	55	54			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	961904
5°	947749
10°	899189
15°	811748
20°	699996
25°	574877
30°	377833
35°	199727
40°	108976
45°	52750
50°	27633
55°	15483
60°	10657
65°	8406
70°	5193
75°	6863
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 52750 cd/sqm



TEST NUMBER: P885763

CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDSL B-340LM-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.7	12.7
10°-20°	110.4	31.5
20°-30°	117.1	33.4
30°-40°	55.6	15.9
40°-50°	16.3	4.6
50°-60°	4.5	1.3
60°-70°	1.6	0.4
70°-80°	0.6	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	272.2	77.6
0°-40°	327.9	93.5
0°-60°	348.6	99.4
0°-90°	350.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	350.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	487	
5°	478	45
15°	397	110
25°	264	117
35°	83	56
45°	19	16
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P885763  
CATALOG NUMBER: ML104LSFL95FS1E-TIR1D55WFL-TL1RDSL B-340LM-2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	487.4
2.5°	486.5
5°	478.4
7.5°	465.8
10°	448.7
12.5°	426.1
15°	397.3
17.5°	367.6
20°	333.3
22.5°	301.8
25°	264.0
27.5°	216.2
30°	165.8
32.5°	117.1
35°	82.9
37.5°	59.5
40°	42.3
42.5°	28.8
45°	18.9
47.5°	12.6
50°	9.0
52.5°	6.3
55°	4.5
57.5°	3.6
60°	2.7
62.5°	1.8
65°	1.8
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)