

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885798

Luminaire Tested: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-100LM-2700K

Issue Date: 7/18/2024


**Test Information**

Test Method: LM-79-2019  
Report Number: P885798  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-120)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 7/18/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-100LM-2700K  
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, MATTE BLACK TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 61.8 lumens  
Efficiency: N/A  
Efficacy: 28.1 lumens/watt  
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.48  
Luminous Opening: Circular (Dia: 0.08' x H: 0')  
CIE Type: Direct

Input Watts (W): 2.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

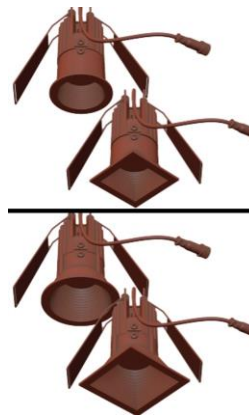

TEST NUMBER: P885798  
CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-100LM-2700K

### Luminous Intensity Polar Plot

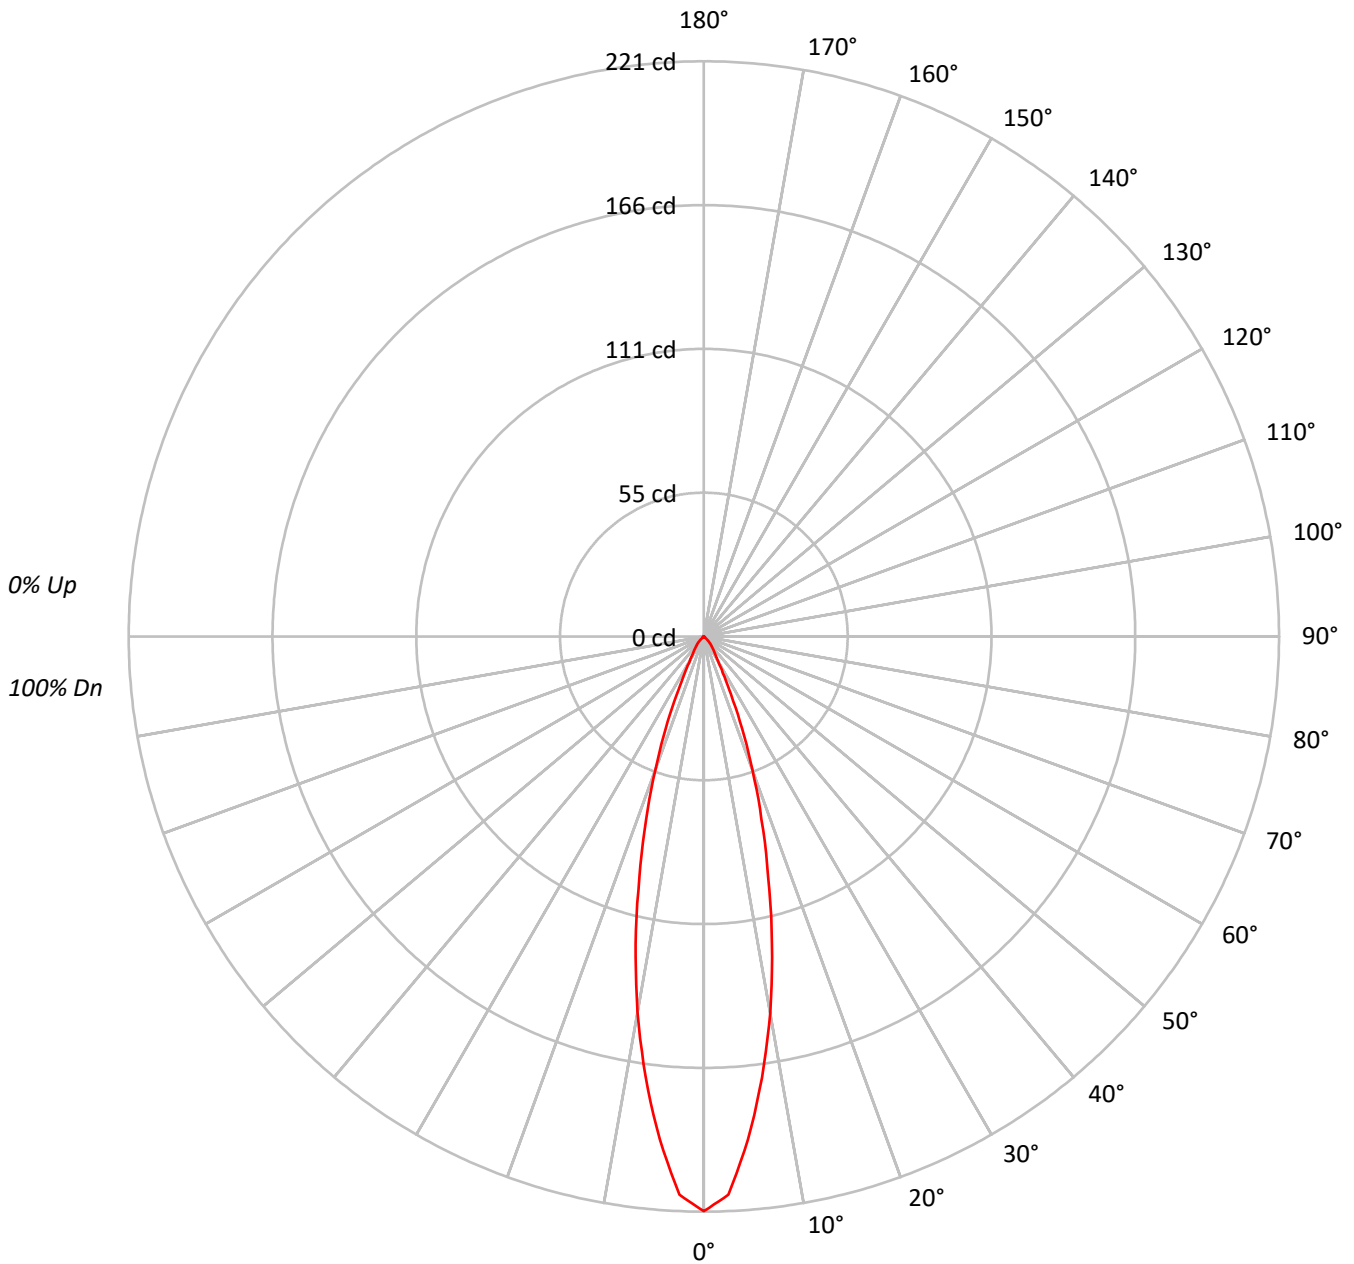



TEST NUMBER: P885798

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDDB-100LM-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	112	110	108	112	110	108	107	106	105	104	103	101	100	99	98	98	96				96															
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92				92															
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88				88															
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84				84															
5	99	93	88	85	98	92	87	84	90	86	84	88	85	83	87	84	82	81				81															
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78				78															
7	92	85	81	77	91	85	80	77	84	80	77	83	79	77	82	78	76	75				75															
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72				72															
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70				70															
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68				68															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	435758
5°	384528
10°	293985
15°	195122
20°	114251
25°	53350
30°	24384
35°	15660
40°	10820
45°	5861
50°	1535
55°	688
60°	789
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5861 cd/sqm



TEST NUMBER: P885798

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-100LM-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	17.0	27.6
10°-20°	26.3	42.6
20°-30°	12.2	19.8
30°-40°	4.2	6.8
40°-50°	1.6	2.6
50°-60°	0.3	0.4
60°-70°	0.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	55.6	90.1
0°-40°	59.8	96.9
0°-60°	61.7	99.9
0°-90°	61.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	61.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	221	
5°	194	17
15°	96	26
25°	24	12
35°	6	4
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885798

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-100LM-2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	220.8
2.5°	214.7
5°	194.1
7.5°	171.0
10°	146.7
12.5°	121.0
15°	95.5
17.5°	73.6
20°	54.4
22.5°	38.3
25°	24.5
27.5°	15.7
30°	10.7
32.5°	8.2
35°	6.5
37.5°	5.1
40°	4.2
42.5°	3.3
45°	2.1
47.5°	0.7
50°	0.5
52.5°	0.5
55°	0.2
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)