

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885803

Luminaire Tested: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-200LM-2700K

Issue Date: 7/18/2024

Test Information

Test Method: LM-79-2019
Report Number: P885803
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-120)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/18/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-200LM-2700K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, MATTE BLACK TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 115.3 lumens
Efficiency: N/A
Efficacy: 34.9 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.48
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 3.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885803
CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-200LM-2700K

Luminous Intensity Polar Plot

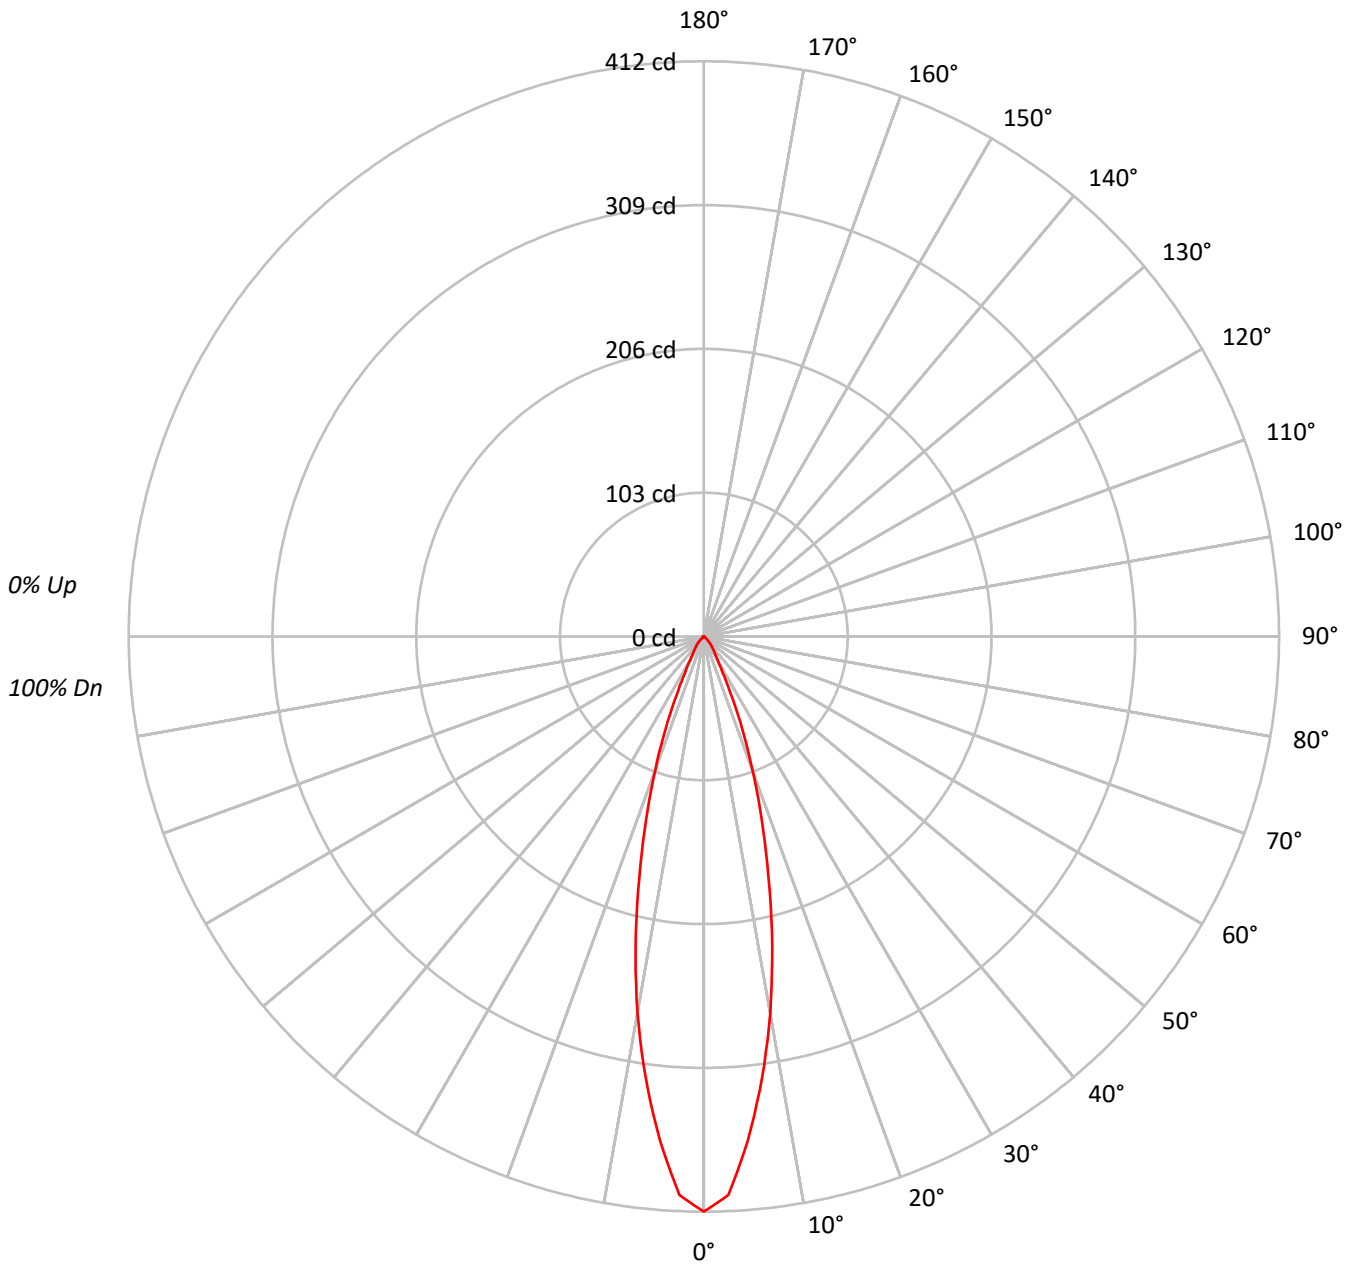



TEST NUMBER: P885803

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDDB-200LM-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	104	103	101	100	99	98	98	96	96	96	96
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	88	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78	78	78	78
7	92	85	81	77	91	85	80	77	84	80	77	83	79	77	82	78	76	75	75	75	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72	72	72	72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68	68	68	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	812902
5°	717547
10°	548491
15°	364296
20°	213170
25°	99732
30°	45577
35°	29393
40°	20095
45°	10885
50°	2763
55°	1376
60°	1579
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10885 cd/sqm



TEST NUMBER: P885803

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-200LM-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.8	27.6
10°-20°	49.1	42.6
20°-30°	22.9	19.8
30°-40°	7.9	6.8
40°-50°	2.9	2.6
50°-60°	0.5	0.5
60°-70°	0.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	103.8	90.0
0°-40°	111.7	96.9
0°-60°	115.1	99.9
0°-90°	115.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	115.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	412	
5°	362	32
15°	178	49
25°	46	23
35°	12	8
45°	4	3
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885803

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D25NFL-TL1RDMB-200LM-2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	411.9
2.5°	400.5
5°	362.2
7.5°	319.0
10°	273.7
12.5°	225.8
15°	178.3
17.5°	137.3
20°	101.5
22.5°	71.5
25°	45.8
27.5°	29.2
30°	20.0
32.5°	15.3
35°	12.2
37.5°	9.6
40°	7.8
42.5°	6.1
45°	3.9
47.5°	1.3
50°	0.9
52.5°	0.9
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)