

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885930

Luminaire Tested: ML104LSFL9FS1E-TIR1D55WFL-TL1RDMB-400LM-3500K

Issue Date: 6/19/2024

Test Information

Test Method: LM-79-2019
Report Number: P885930
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-132)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFL9FS1E-TIR1D55WFL-TL1RDMB-400LM-3500K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE BLACK TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 397.5 lumens
Efficiency: N/A
Efficacy: 66.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.76
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885930
CATALOG NUMBER: ML104LSFL9FS1E-TIR1D55WFL-TL1RD55WFL-400LM-3500K

Luminous Intensity Polar Plot

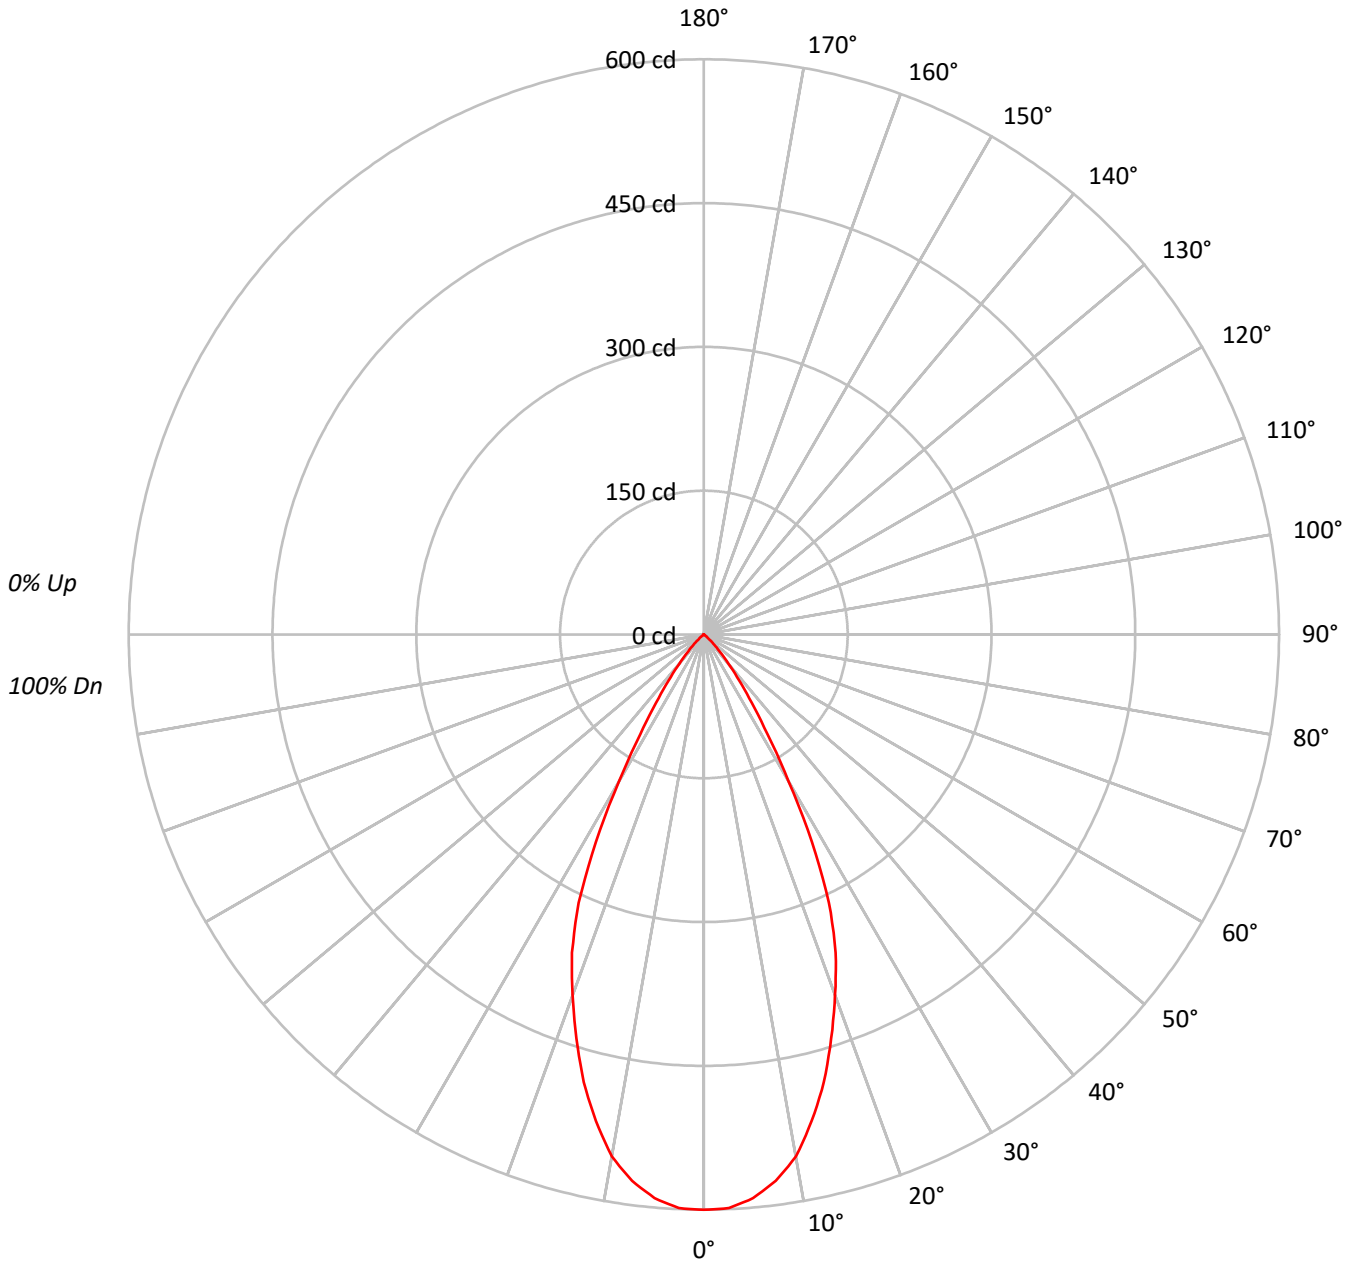



TEST NUMBER: P885930

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D55WFL-TL1RDMB-400LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98	97	96	94
2	109	104	101	98	107	103	99	97	100	97	94		97	94	92		94	92	91	89
3	104	98	94	90	102	97	93	89	94	91	88		92	89	86		90	87	85	84
4	99	92	87	84	98	91	87	83	89	85	82		87	84	81		85	83	80	79
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82	78	76	74
6	91	83	77	73	89	82	77	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	78	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1184322
5°	1169234
10°	1108004
15°	988073
20°	840290
25°	672649
30°	403356
35°	209123
40°	102021
45°	42982
50°	13509
55°	3785
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 42982 cd/sqm



TEST NUMBER: P885930

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D55WFL-TL1RDMB-400LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.1	13.9
10°-20°	134.0	33.7
20°-30°	135.9	34.2
30°-40°	57.8	14.6
40°-50°	13.5	3.4
50°-60°	1.2	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	325.0	81.8
0°-40°	382.9	96.3
0°-60°	397.5	100.0
0°-90°	397.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	397.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	600	
5°	590	55
15°	484	134
25°	309	136
35°	87	58
45°	15	13
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P885930

CATALOG NUMBER: ML104LSFL9FS1E-TIR1D55WFL-TL1RDMB-400LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	600.1
2.5°	599.0
5°	590.2
7.5°	574.8
10°	552.9
12.5°	519.9
15°	483.6
17.5°	441.8
20°	400.1
22.5°	359.4
25°	308.9
27.5°	244.0
30°	177.0
32.5°	123.1
35°	86.8
37.5°	60.5
40°	39.6
42.5°	25.3
45°	15.4
47.5°	8.8
50°	4.4
52.5°	2.2
55°	1.1
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)