

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P885998

Luminaire Tested: ML104LSFLD2W1E-TIR1D25NFL-TL1RDSL B-200LM-2700K

Issue Date: 7/18/2024

Test Information

Test Method: LM-79-2019
Report Number: P885998
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-122)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/18/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFLD2W1E-TIR1D25NFL-TL1RDSL B-200LM-2700K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, METALLIC SILVER BAFFLED TRIM
Light Source: (1) D2W LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 181.1 lumens
Efficiency: N/A
Efficacy: 56.6 lumens/watt
Spacing Criteria (0/90/45): 0.46 / 0.46 / 0.49
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct


Input Watts (W): 3.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P885998

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D25NFL-TL1RDSL B-200LM-2700K

Luminous Intensity Polar Plot

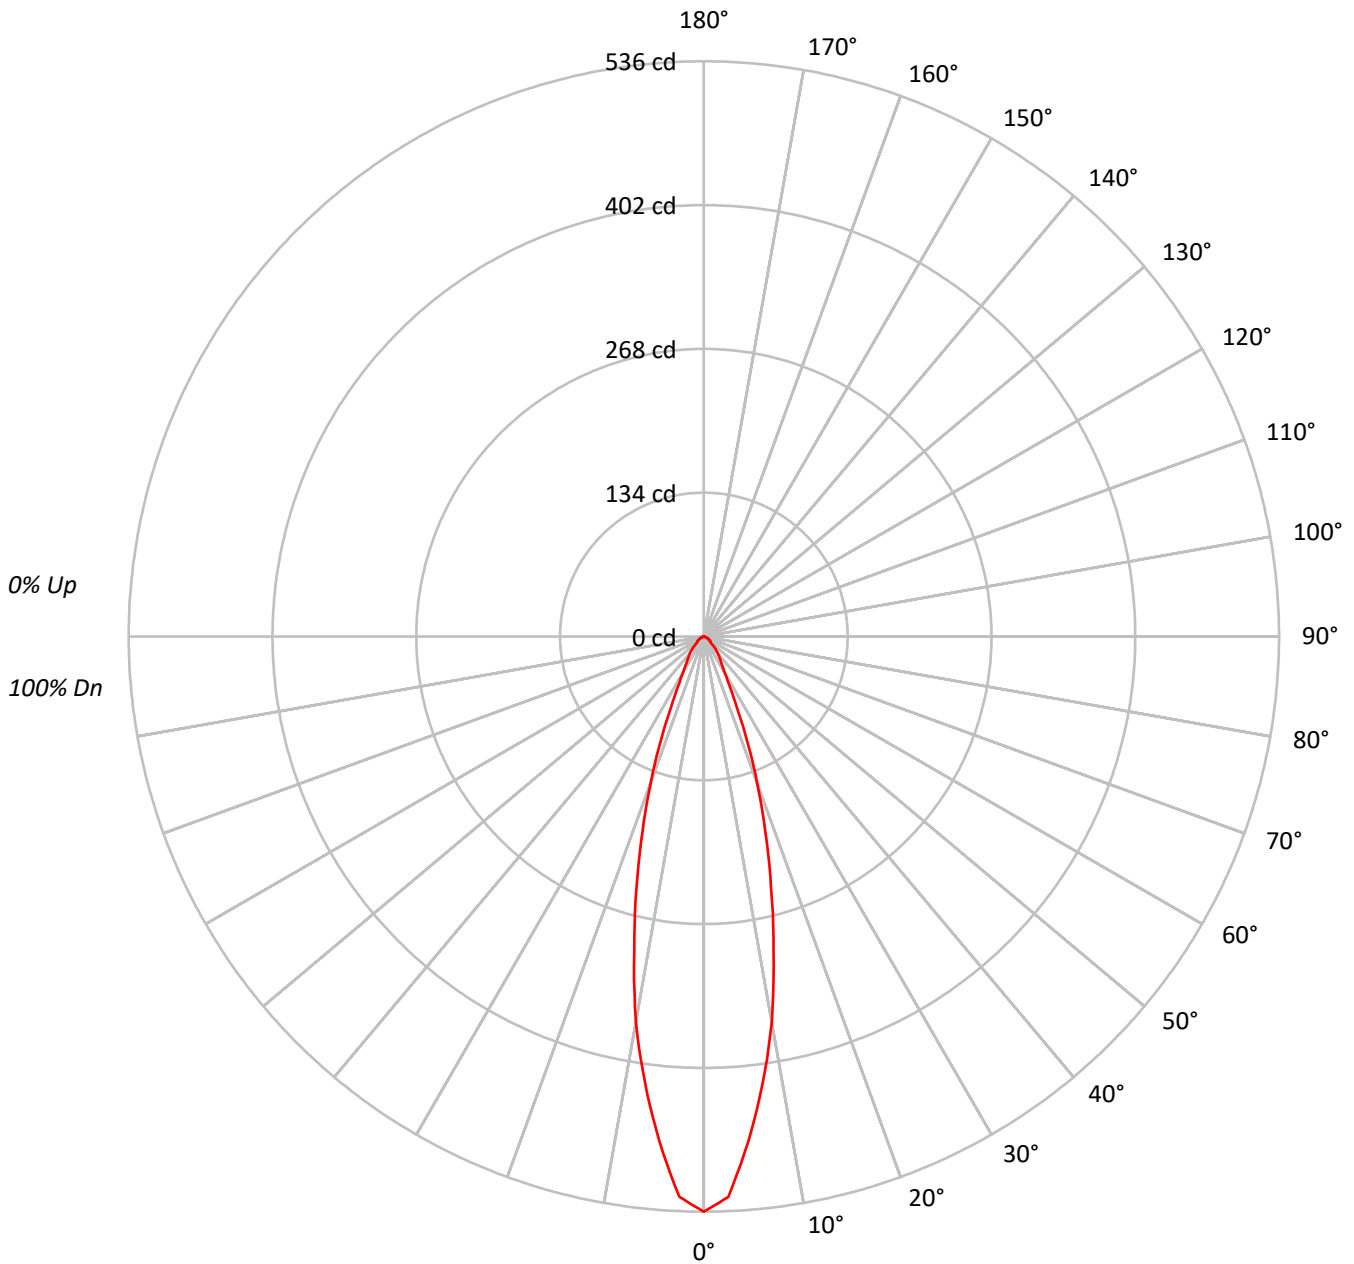



TEST NUMBER: P885998

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D25NFL-TL1RDSL B-200LM-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84			
4	100	93	88	84	98	92	87	83	89	85	82	88	84	81	86	83	80	79			
5	95	88	83	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75			
6	92	84	78	74	90	83	78	74	81	77	74	80	76	73	79	75	73	71			
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68			
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	67	65			
9	82	73	68	65	81	73	68	64	72	67	64	71	67	64	70	67	64	63			
10	79	70	65	62	78	70	65	62	69	65	62	68	64	62	68	64	61	60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1057818
5°	936655
10°	730654
15°	494241
20°	303059
25°	155913
30°	87280
35°	64086
40°	51526
45°	37120
50°	25483
55°	23053
60°	19735
65°	15410
70°	9809
75°	4575
80°	6819
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 37120 cd/sqm



TEST NUMBER: P885998

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D25NFL-TL1RDSL B-200LM-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.8	23.1
10°-20°	66.7	36.8
20°-30°	35.4	19.5
30°-40°	17.1	9.4
40°-50°	10.1	5.6
50°-60°	6.0	3.3
60°-70°	3.1	1.7
70°-80°	0.9	0.5
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	143.9	79.4
0°-40°	160.9	88.9
0°-60°	177.0	97.7
0°-90°	181.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	181.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	536	
5°	473	42
15°	242	67
25°	72	35
35°	27	17
45°	13	10
55°	7	6
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P885998

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D25NFL-TL1RDSL B-200LM-2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	536.0
2.5°	522.7
5°	472.8
7.5°	420.1
10°	364.6
12.5°	300.2
15°	241.9
17.5°	189.8
20°	144.3
22.5°	104.9
25°	71.6
27.5°	50.5
30°	38.3
32.5°	31.6
35°	26.6
37.5°	22.8
40°	20.0
42.5°	16.6
45°	13.3
47.5°	8.9
50°	8.3
52.5°	7.2
55°	6.7
57.5°	6.1
60°	5.0
62.5°	3.9
65°	3.3
67.5°	2.2
70°	1.7
72.5°	1.1
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)