

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886037

Luminaire Tested: ML104LSFLD2W1E-TIR1D55WFL-TL1RDMB-200LM-4000K

Issue Date: 6/19/2024

Test Information

Test Method: LM-79-2019
Report Number: P886037
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-132)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFLD2W1E-TIR1D55WFL-TL1RDMB-200LM-4000K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE BLACK TRIM
Light Source: (1) D2W LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 215.0 lumens
Efficiency: N/A
Efficacy: 67.2 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.76
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 3.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886037
CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDMB-200LM-4000K

Luminous Intensity Polar Plot

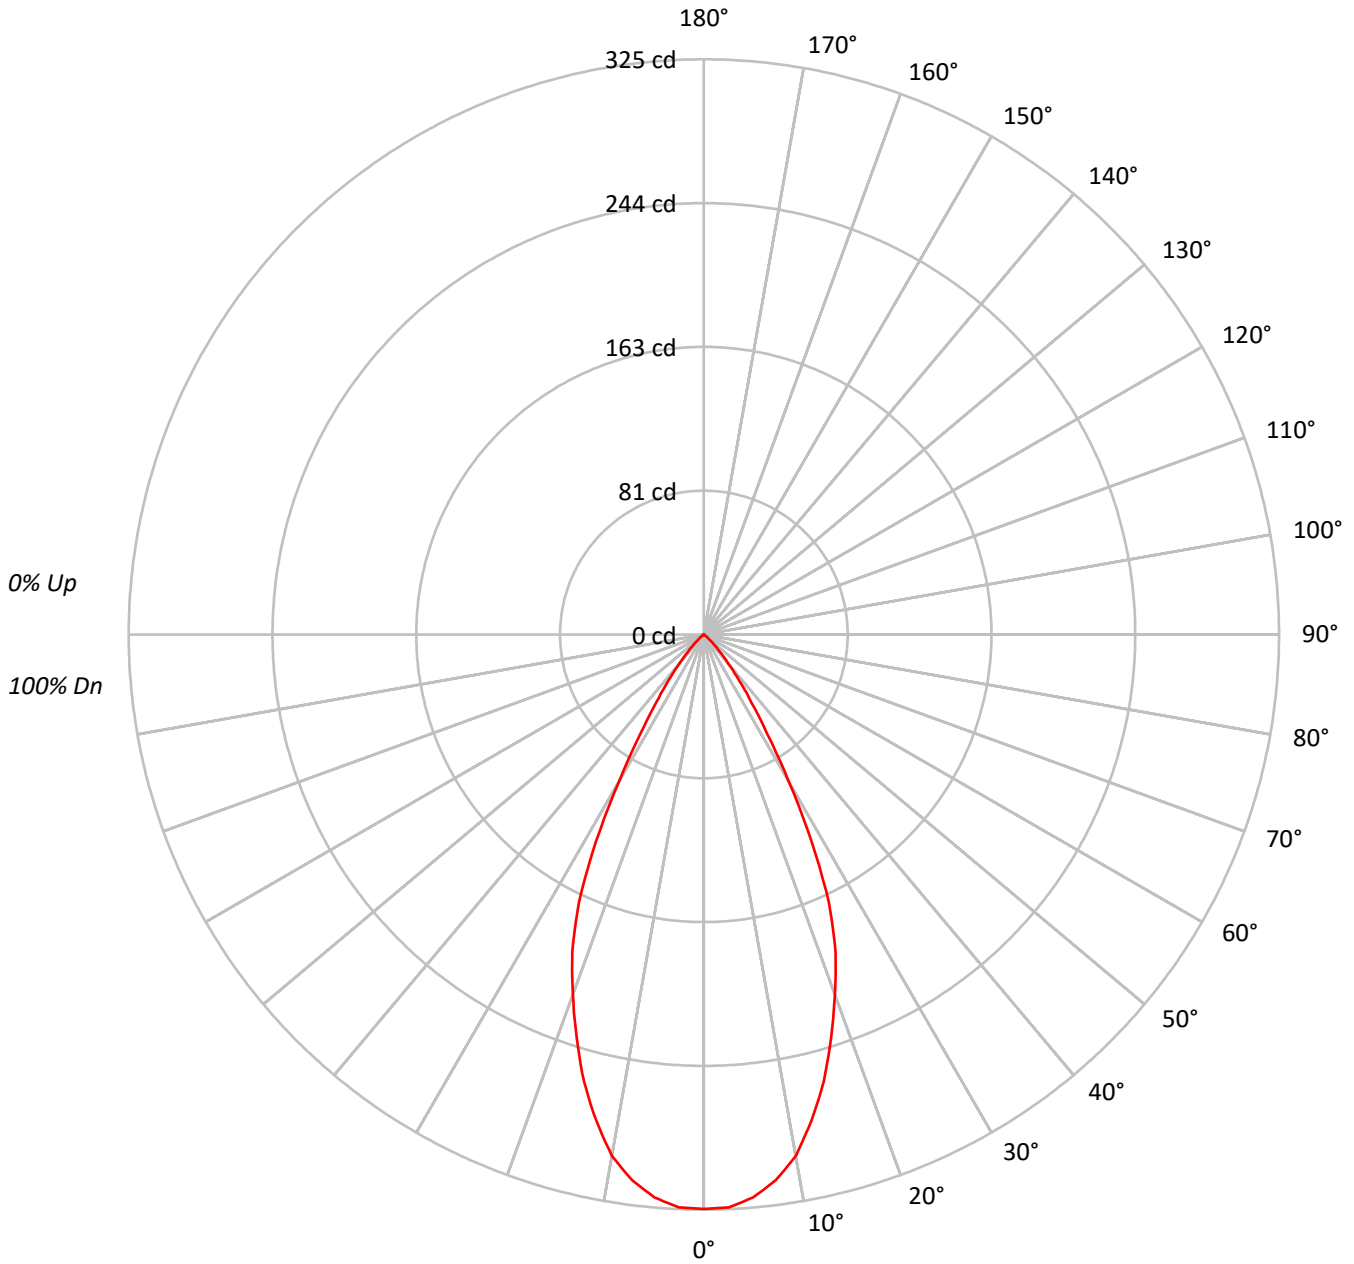



TEST NUMBER: P886037

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDDB-200LM-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	94			
2	109	104	101	98	107	103	99	97	100	97	94	97	94	92	94	92	91	89			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84			
4	99	92	87	84	98	91	87	83	89	85	82	87	84	81	85	83	80	79			
5	95	87	82	78	93	86	81	78	85	80	77	83	79	76	82	78	76	74			
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63			
9	79	71	65	62	78	70	65	61	69	65	61	68	64	61	68	64	61	60			
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	640612
5°	632559
10°	599392
15°	534491
20°	454483
25°	363871
30°	218086
35°	113235
40°	55132
45°	23165
50°	7369
55°	2064
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23165 cd/sqm



TEST NUMBER: P886037

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDDB-200LM-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.8	13.9
10°-20°	72.5	33.7
20°-30°	73.5	34.2
30°-40°	31.3	14.6
40°-50°	7.3	3.4
50°-60°	0.7	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	175.8	81.8
0°-40°	207.1	96.3
0°-60°	215.0	100.0
0°-90°	215.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	215.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	325	
5°	319	30
15°	262	72
25°	167	74
35°	47	31
45°	8	7
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P886037

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDMB-200LM-4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	324.6
2.5°	324.0
5°	319.3
7.5°	311.0
10°	299.1
12.5°	281.2
15°	261.6
17.5°	239.0
20°	216.4
22.5°	194.4
25°	167.1
27.5°	132.0
30°	95.7
32.5°	66.6
35°	47.0
37.5°	32.7
40°	21.4
42.5°	13.7
45°	8.3
47.5°	4.8
50°	2.4
52.5°	1.2
55°	0.6
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)