

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886044

Luminaire Tested: ML104LSFLD2W1E-TIR1D55WFL-TL1RDSL-200LM-3500K

Issue Date: 6/19/2024

Test Information

Test Method: LM-79-2019
Report Number: P886044
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-131)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML104LSFLD2W1E-TIR1D55WFL-TL1RDSL-200LM-3500K
Description: 1IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, METALLIC SILVER TRIM
Light Source: (1) D2W LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 215.9 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.77
Luminous Opening: Circular (Dia: 0.08' x H: 0')
CIE Type: Direct

Input Watts (W): 3.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886044
CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDSL-200LM-3500K

Luminous Intensity Polar Plot

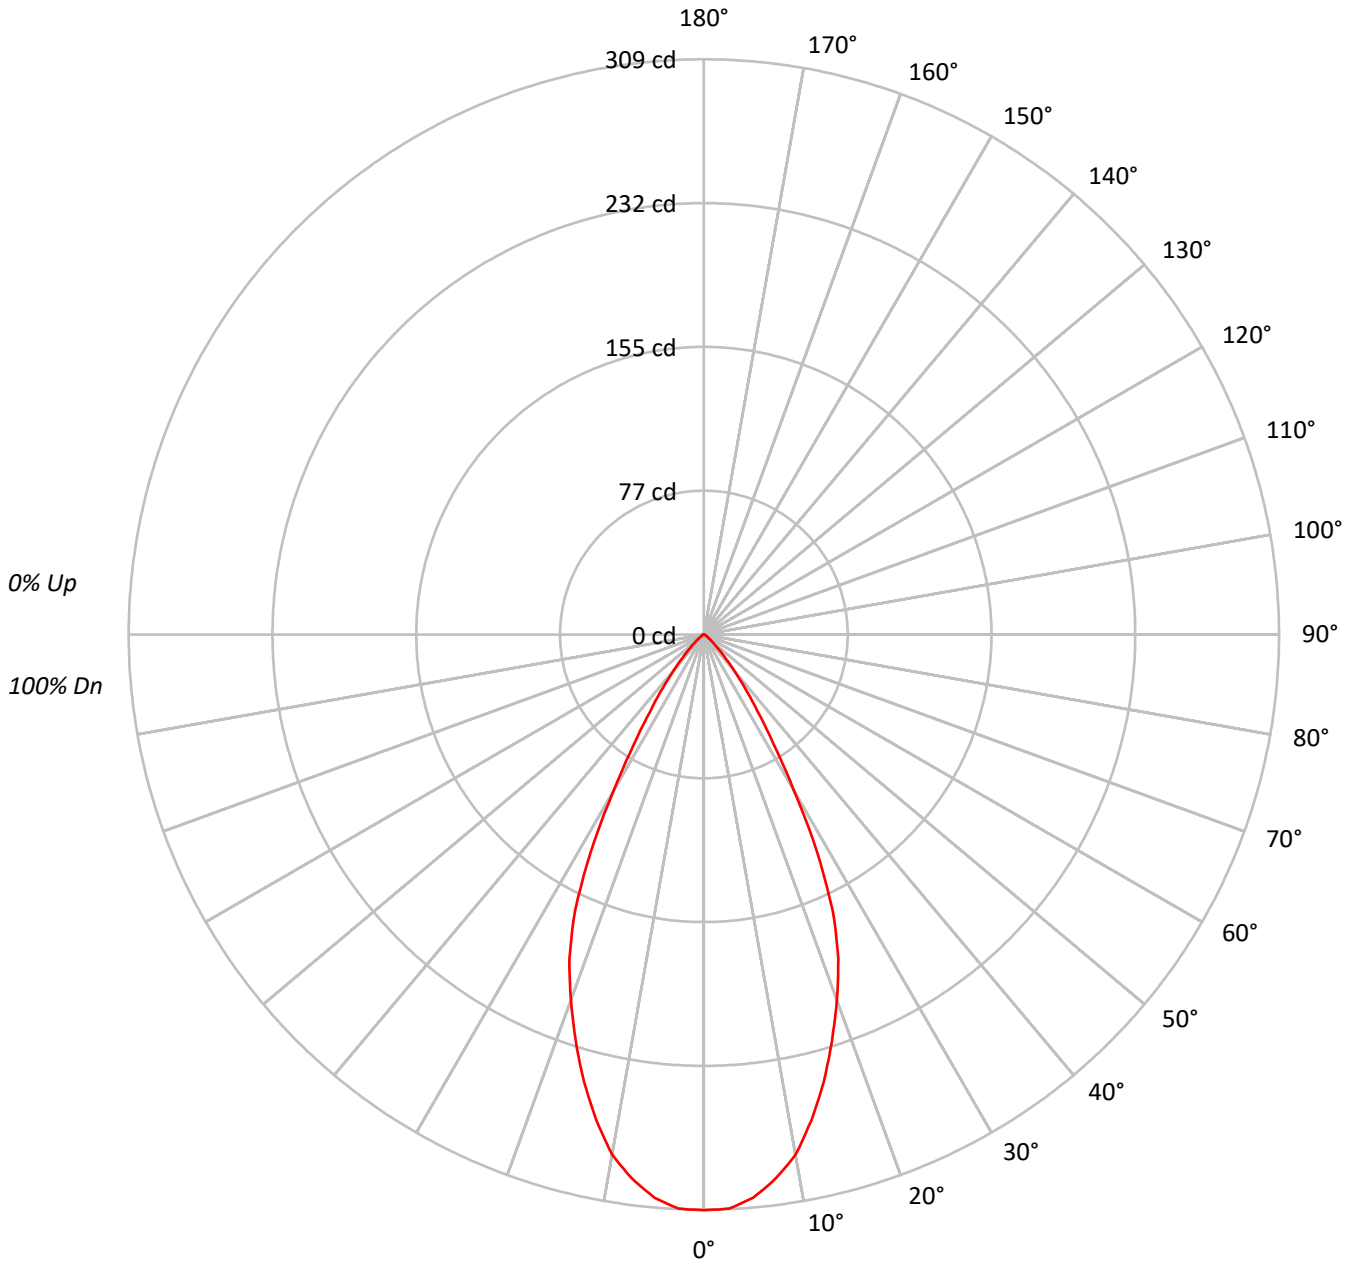



TEST NUMBER: P886044
 CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDSL-200LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88			
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	83			
4	99	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77			
5	94	86	81	76	92	85	80	76	83	79	75	82	78	75	80	77	74	73			
6	90	81	76	72	88	80	75	71	79	74	71	78	73	70	76	73	70	68			
7	86	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65			
8	82	73	67	63	81	72	67	63	71	66	63	70	66	63	69	65	62	61			
9	78	69	63	60	77	69	63	60	68	63	59	67	62	59	66	62	59	58			
10	75	66	60	57	74	65	60	56	64	60	56	64	59	56	63	59	56	55			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	610417
5°	601852
10°	568731
15°	508338
20°	438522
25°	356685
30°	220137
35°	120462
40°	64407
45°	30980
50°	15351
55°	7570
60°	4342
65°	5137
70°	3462
75°	4575
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30980 cd/sqm



TEST NUMBER: P886044

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDSL-200LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.3	13.1
10°-20°	69.1	32.0
20°-30°	72.2	33.4
30°-40°	33.1	15.3
40°-50°	9.6	4.4
50°-60°	2.3	1.1
60°-70°	0.9	0.4
70°-80°	0.4	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	169.6	78.6
0°-40°	202.8	93.9
0°-60°	214.6	99.4
0°-90°	215.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	215.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	309	
5°	304	28
15°	249	69
25°	164	72
35°	50	33
45°	11	10
55°	2	2
65°	1	1
75°	1	0
85°	0	0
90°	0	



TEST NUMBER: P886044

CATALOG NUMBER: ML104LSFLD2W1E-TIR1D55WFL-TL1RDSL-200LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	309.3
2.5°	308.8
5°	303.8
7.5°	294.9
10°	283.8
12.5°	267.1
15°	248.8
17.5°	228.8
20°	208.8
22.5°	188.8
25°	163.8
27.5°	131.6
30°	96.6
32.5°	69.4
35°	50.0
37.5°	36.1
40°	25.0
42.5°	17.2
45°	11.1
47.5°	7.2
50°	5.0
52.5°	3.3
55°	2.2
57.5°	1.7
60°	1.1
62.5°	1.1
65°	1.1
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)