

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886132

Luminaire Tested: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-3500K

Issue Date: 6/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P886132
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-79)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-3500K
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, MATTE BLACK TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 504.1 lumens
Efficiency: N/A
Efficacy: 63.0 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.67
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886132

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDDB-468LM-3500K

Luminous Intensity Polar Plot

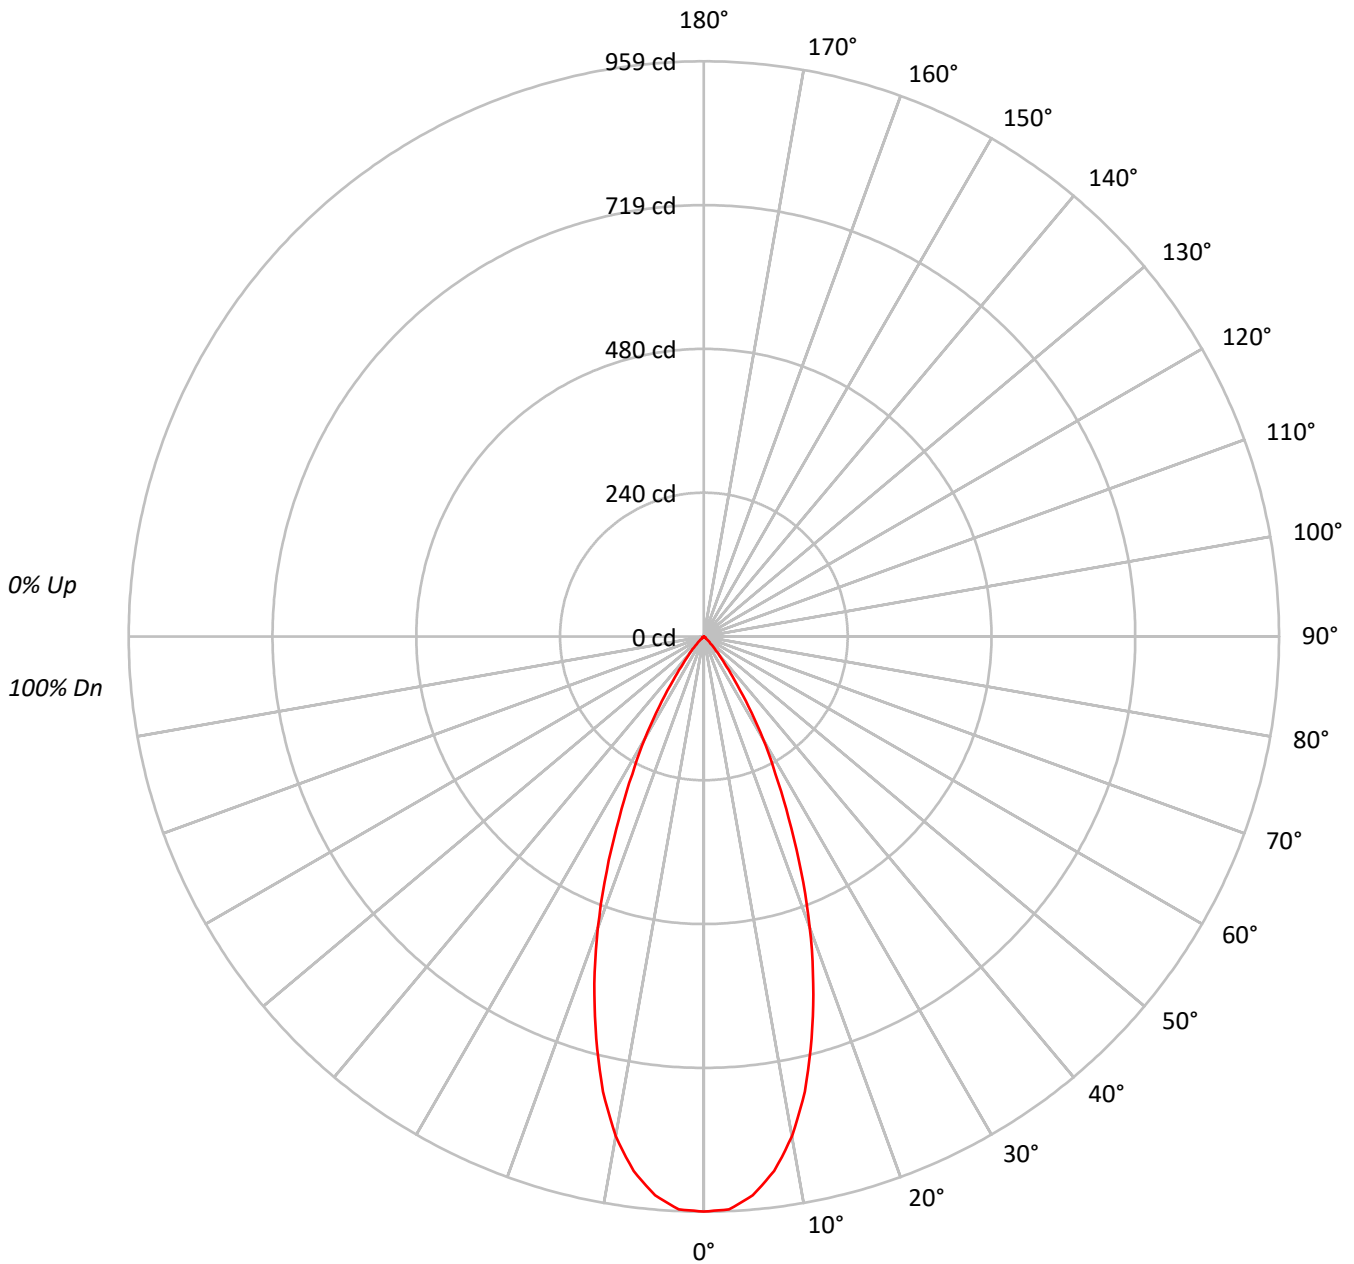



TEST NUMBER: P886132

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDDB-468LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63	63	63	63
10	79	70	65	62	78	70	65	62	69	65	62	68	64	62	68	64	61	60	60	60	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	473052
5°	463320
10°	423838
15°	354382
20°	271185
25°	181770
30°	112175
35°	53364
40°	23637
45°	7466
50°	2072
55°	774
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7466 cd/sqm



TEST NUMBER: P886132

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDDB-468LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.4	17.1
10°-20°	190.7	37.8
20°-30°	154.5	30.6
30°-40°	60.9	12.1
40°-50°	10.7	2.1
50°-60°	0.9	0.2
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	431.6	85.6
0°-40°	492.5	97.7
0°-60°	504.1	100.0
0°-90°	504.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	504.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	959	
5°	936	86
15°	694	191
25°	334	154
35°	89	61
45°	11	11
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P886132

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	958.8
2.5°	956.1
5°	935.5
7.5°	898.8
10°	846.0
12.5°	777.1
15°	693.8
17.5°	607.0
20°	516.5
22.5°	423.4
25°	333.9
27.5°	258.7
30°	196.9
32.5°	138.8
35°	88.6
37.5°	56.4
40°	36.7
42.5°	22.4
45°	10.7
47.5°	4.5
50°	2.7
52.5°	1.8
55°	0.9
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)