

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886133

Luminaire Tested: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-4000K

Issue Date: 6/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P886133
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-79)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-4000K
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, MATTE BLACK TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 521.4 lumens
Efficiency: N/A
Efficacy: 65.2 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.67
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886133

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-4000K

Luminous Intensity Polar Plot

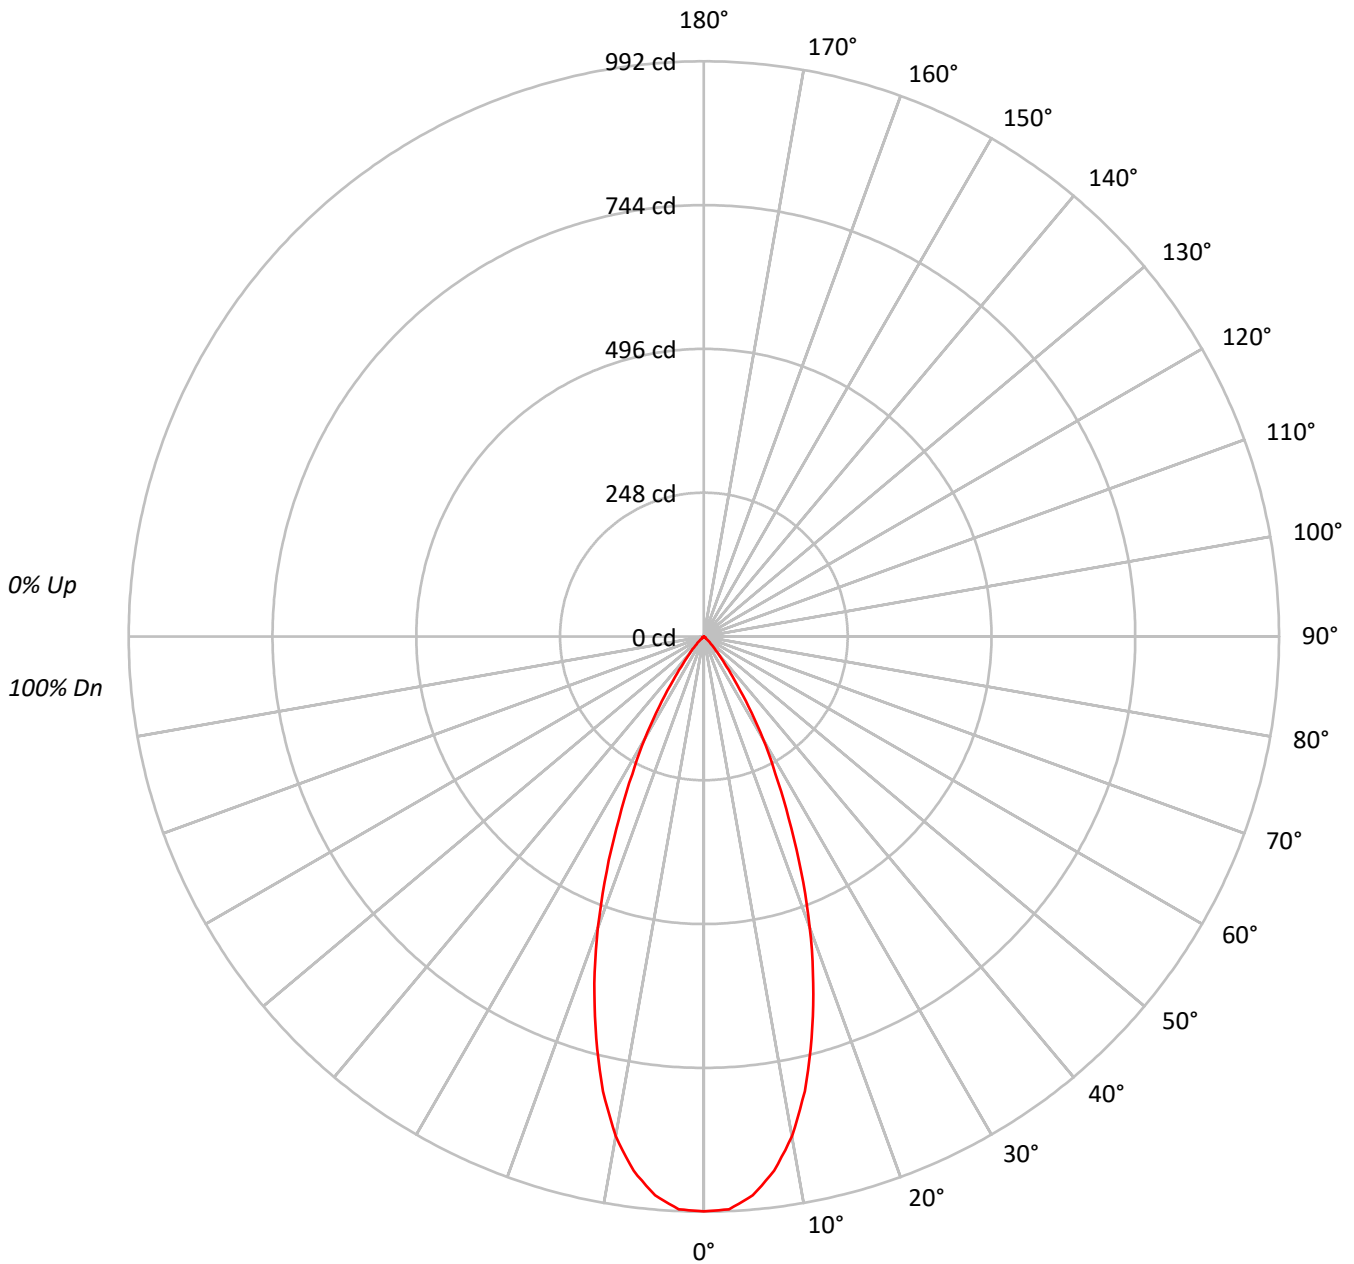



TEST NUMBER: P886133

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDDB-468LM-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90		
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73		
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66		
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63		
10	79	70	65	62	78	70	65	62	69	65	62	68	64	62	68	64	61	60		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	489186
5°	479168
10°	438317
15°	366488
20°	280478
25°	187976
30°	116049
35°	55231
40°	24474
45°	7745
50°	2149
55°	774
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7745 cd/sqm



TEST NUMBER: P886133

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDDB-468LM-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.4	17.1
10°-20°	197.2	37.8
20°-30°	159.8	30.6
30°-40°	63.0	12.1
40°-50°	11.1	2.1
50°-60°	0.9	0.2
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	446.4	85.6
0°-40°	509.4	97.7
0°-60°	521.4	100.0
0°-90°	521.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	521.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	992	
5°	968	89
15°	718	197
25°	345	160
35°	92	63
45°	11	11
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P886133

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D40FL-TL2RDMB-468LM-4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	991.5
2.5°	988.8
5°	967.5
7.5°	929.5
10°	874.9
12.5°	803.6
15°	717.5
17.5°	627.7
20°	534.2
22.5°	437.9
25°	345.3
27.5°	267.6
30°	203.7
32.5°	143.5
35°	91.7
37.5°	58.3
40°	38.0
42.5°	23.1
45°	11.1
47.5°	4.6
50°	2.8
52.5°	1.9
55°	0.9
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)