

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886192

Luminaire Tested: ML204LSFL95FS1E-TIR1D55WFL-TL2RDDB-468LM-3500K

Issue Date: 6/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P886192
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-85)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML204LSFL95FS1E-TIR1D55WFL-TL2RDDB-468LM-3500K
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE BLACK TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 484.6 lumens
Efficiency: N/A
Efficacy: 60.6 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.81
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886192

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D55WFL-TL2RDDB-468LM-3500K

Luminous Intensity Polar Plot

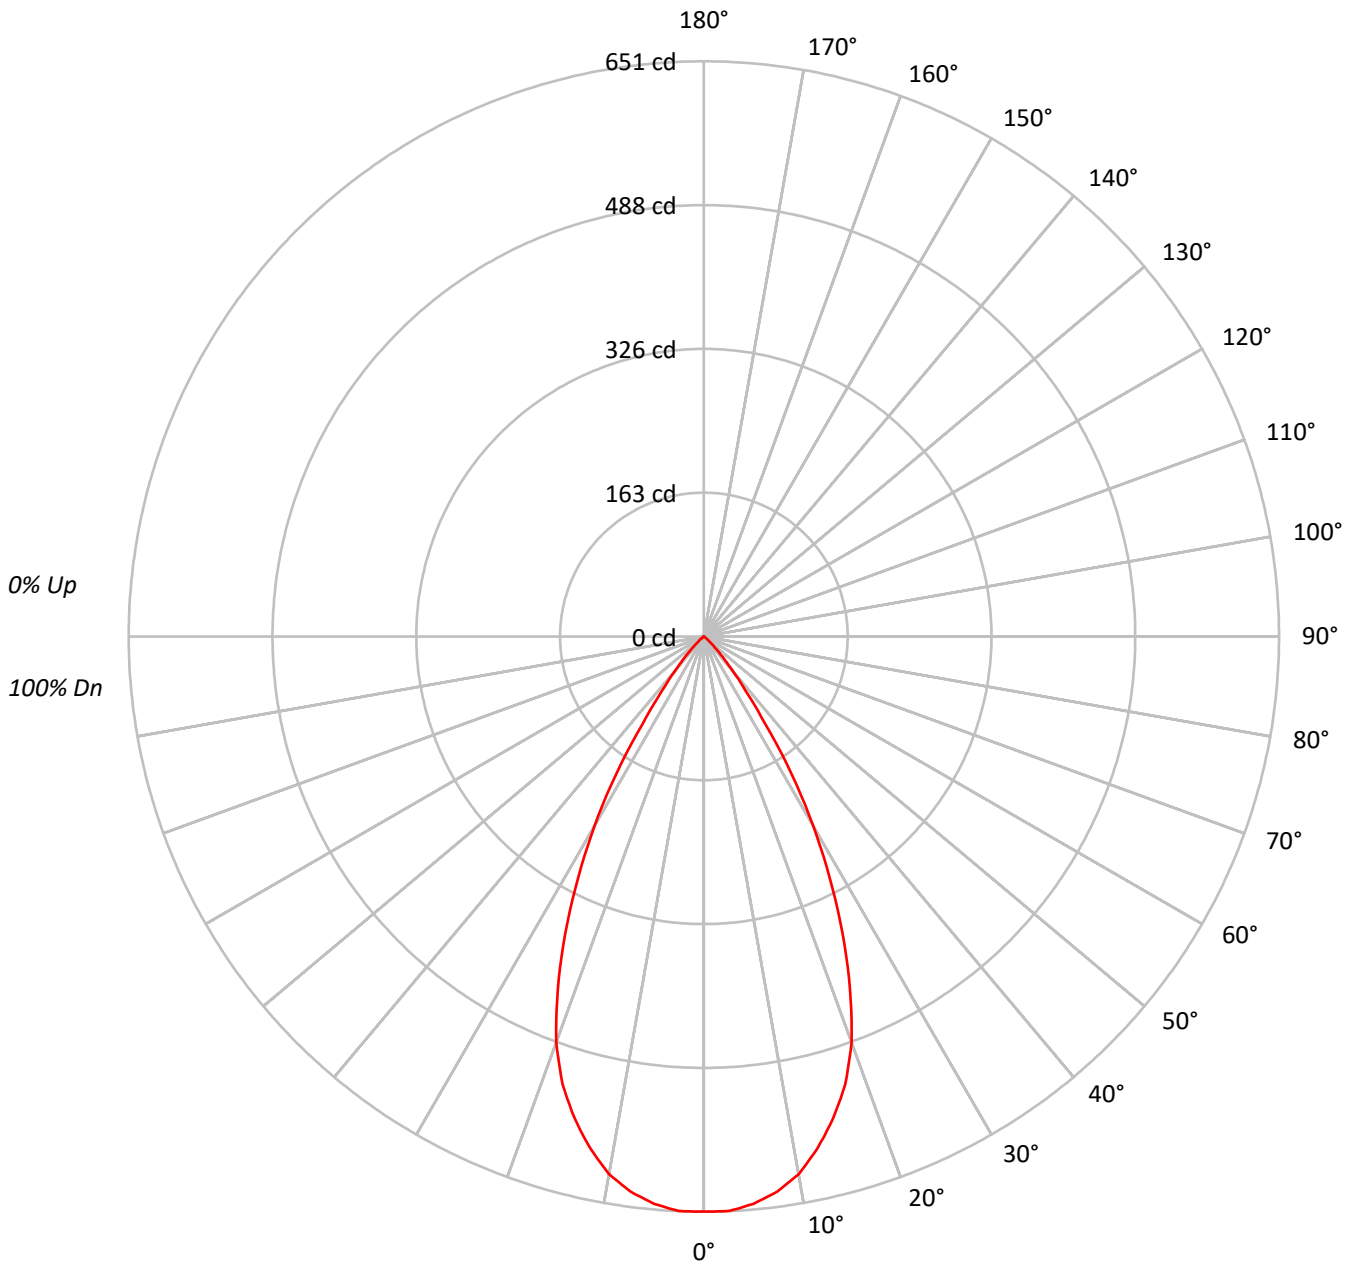



TEST NUMBER: P886192

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D55WFL-TL2RDMB-468LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78			
5	94	87	81	77	93	86	81	77	84	80	76	82	78	75	81	77	75	73			
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	71	69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65			
8	82	73	68	64	81	73	67	64	72	67	63	71	66	63	70	66	63	62			
9	79	69	64	60	77	69	64	60	68	63	60	67	63	60	66	62	60	58			
10	75	66	61	57	74	66	60	57	65	60	57	64	60	57	63	59	56	55			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	321141
5°	319247
10°	309512
15°	288542
20°	256641
25°	202239
30°	140774
35°	72819
40°	32847
45°	12490
50°	3454
55°	774
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12490 cd/sqm



TEST NUMBER: P886192

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D55WFL-TL2RDMB-468LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.7	12.5
10°-20°	157.2	32.4
20°-30°	168.0	34.7
30°-40°	81.2	16.8
40°-50°	16.2	3.3
50°-60°	1.3	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	385.9	79.6
0°-40°	467.1	96.4
0°-60°	484.6	100.0
0°-90°	484.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	484.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	651	
5°	645	61
15°	565	157
25°	372	168
35°	121	81
45°	18	16
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P886192

CATALOG NUMBER: ML204LSFL95FS1E-TIR1D55WFL-TL2RDDB-468LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	650.9
2.5°	650.9
5°	644.6
7.5°	633.9
10°	617.8
12.5°	593.6
15°	564.9
17.5°	531.8
20°	488.8
22.5°	432.4
25°	371.5
27.5°	308.9
30°	247.1
32.5°	185.3
35°	120.9
37.5°	77.9
40°	51.0
42.5°	31.3
45°	17.9
47.5°	9.0
50°	4.5
52.5°	2.7
55°	0.9
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)