

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886279

Luminaire Tested: ML204LSFL9FS1E-TIR1D25NFL-TL2RDMWB-550LM-5000K

Issue Date: 7/18/2024

Test Information

Test Method: LM-79-2019
Report Number: P886279
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-74)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/18/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML204LSFL9FS1E-TIR1D25NFL-TL2RDMWB-550LM-5000K
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, MATTE WHITE BAFFLED TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 549.0 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 0.46 / 0.46 / 0.54
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886279
CATALOG NUMBER: ML204LSFL9FS1E-TIR1D25NFL-TL2RDMWB-550LM-5000K

Luminous Intensity Polar Plot

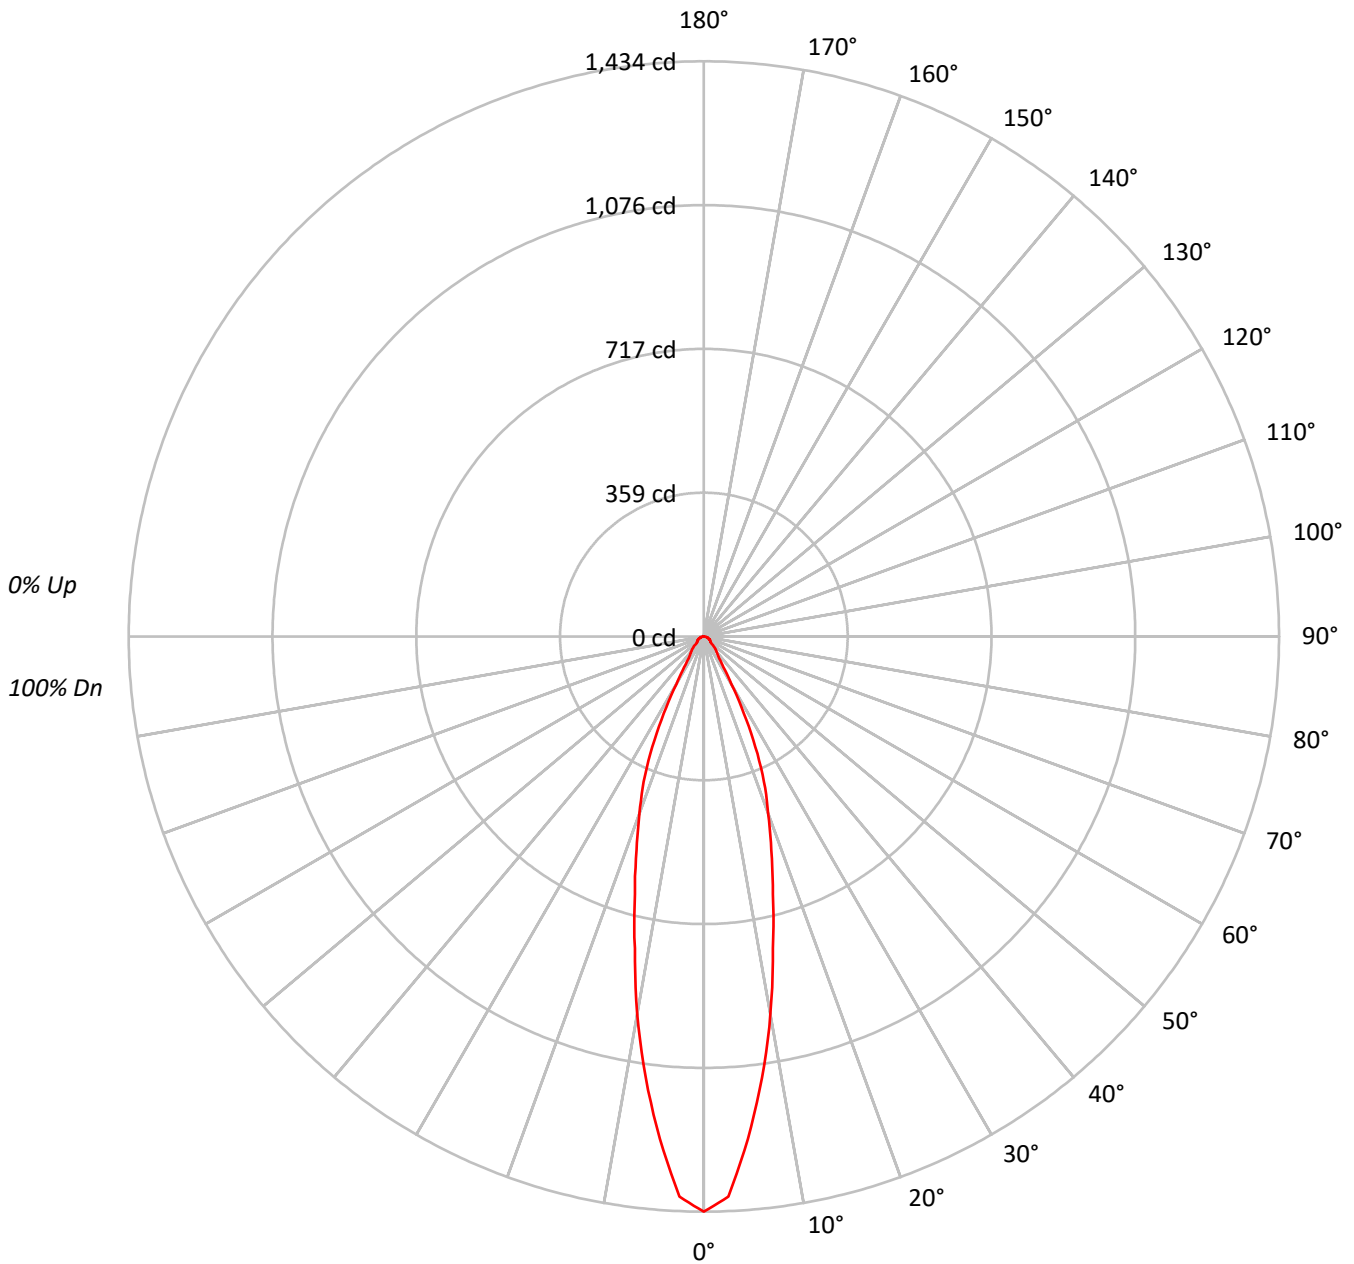



TEST NUMBER: P886279
 CATALOG NUMBER: ML204LSFL9FS1E-TIR1D25NFL-TL2RDMWB-550LM-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87																			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82																			
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77																			
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	73																			
6	90	82	76	72	89	81	76	72	79	75	71	78	74	71	77	73	70	69																			
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66																			
8	83	74	69	65	82	74	68	65	73	68	64	72	67	64	71	67	64	63																			
9	80	71	66	62	79	70	65	62	70	65	62	69	64	61	68	64	61	60																			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	61	59	58																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	707457
5°	622795
10°	478897
15°	339518
20°	246088
25°	165438
30°	77993
35°	39812
40°	31366
45°	25119
50°	16886
55°	16946
60°	17170
65°	16227
70°	15002
75°	15441
80°	13070
85°	13020

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25119 cd/sqm



TEST NUMBER: P886279

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D25NFL-TL2RDMWB-550LM-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.7	20.2
10°-20°	186.6	34.0
20°-30°	135.9	24.8
30°-40°	46.9	8.5
40°-50°	26.5	4.8
50°-60°	17.7	3.2
60°-70°	13.8	2.5
70°-80°	8.4	1.5
80°-90°	2.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	433.2	78.9
0°-40°	480.1	87.4
0°-60°	524.3	95.5
0°-90°	549.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	549.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1434	
5°	1258	111
15°	665	187
25°	304	136
35°	66	47
45°	36	27
55°	20	18
65°	14	14
75°	8	8
85°	2	3
90°	0	



TEST NUMBER: P886279

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D25NFL-TL2RDMWB-550LM-5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1433.9
2.5°	1397.9
5°	1257.5
7.5°	1110.2
10°	955.9
12.5°	795.8
15°	664.7
17.5°	558.0
20°	468.7
22.5°	392.1
25°	303.9
27.5°	215.8
30°	136.9
32.5°	90.5
35°	66.1
37.5°	55.7
40°	48.7
42.5°	42.9
45°	36.0
47.5°	24.4
50°	22.0
52.5°	20.9
55°	19.7
57.5°	18.6
60°	17.4
62.5°	15.1
65°	13.9
67.5°	12.8
70°	10.4
72.5°	9.3
75°	8.1
77.5°	7.0
80°	4.6
82.5°	3.5
85°	2.3
87.5°	1.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)