

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886330

Luminaire Tested: ML204LSFL9FS1E-TIR1D40FL-TL2RDMW-550LM-2700K

Issue Date: 6/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P886330  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-77)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 6/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML204LSFL9FS1E-TIR1D40FL-TL2RDMW-550LM-2700K  
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, MATTE WHITE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 598.8 lumens  
Efficiency: N/A  
Efficacy: 75.8 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.67  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P886330

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDMW-550LM-2700K

### Luminous Intensity Polar Plot

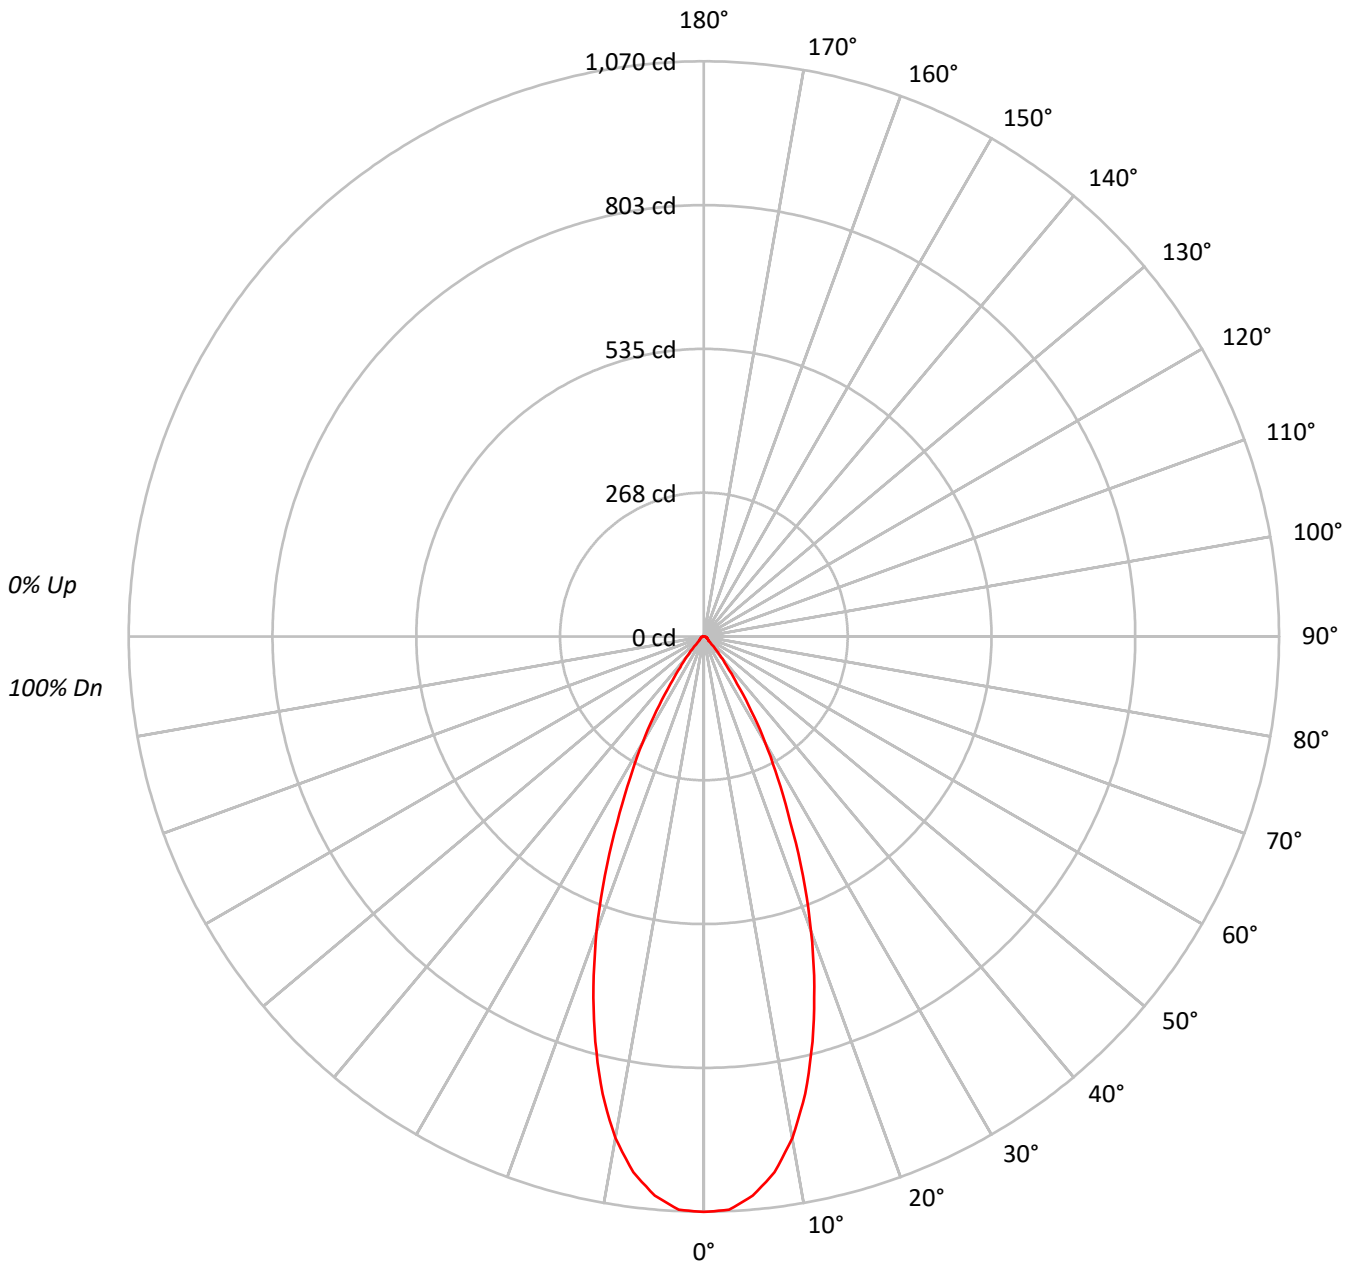



TEST NUMBER: P886330

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDMW-550LM-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94	94	94	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88	88	88	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83	83	83	83
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78	78	78	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74	74	74	74
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70	70	70	70
7	87	78	73	69	86	78	73	69	77	72	69	75	71	68	74	71	68	67	67	67	67
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	65	63	63	63	63
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60	60	60	60
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58	58	58	58

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	528113
5°	517254
10°	474639
15°	398565
20°	306205
25°	206975
30°	129950
35°	65049
40°	32203
45°	13955
50°	8443
55°	6881
60°	6907
65°	7005
70°	7213
75°	7625
80°	8524
85°	5661

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13955 cd/sqm



TEST NUMBER: P886330

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDMW-550LM-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.6	16.1
10°-20°	214.4	35.8
20°-30°	176.1	29.4
30°-40°	73.7	12.3
40°-50°	18.3	3.1
50°-60°	7.8	1.3
60°-70°	6.2	1.0
70°-80°	4.2	0.7
80°-90°	1.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	487.1	81.4
0°-40°	560.8	93.7
0°-60°	586.9	98.0
0°-90°	598.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	598.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1070	
5°	1044	97
15°	780	214
25°	380	176
35°	108	74
45°	20	18
55°	8	8
65°	6	6
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P886330

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDMW-550LM-2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1070.4
2.5°	1067.4
5°	1044.4
7.5°	1005.4
10°	947.4
12.5°	871.4
15°	780.3
17.5°	683.3
20°	583.2
22.5°	481.2
25°	380.2
27.5°	297.1
30°	228.1
32.5°	164.1
35°	108.0
37.5°	72.0
40°	50.0
42.5°	33.0
45°	20.0
47.5°	13.0
50°	11.0
52.5°	10.0
55°	8.0
57.5°	8.0
60°	7.0
62.5°	7.0
65°	6.0
67.5°	6.0
70°	5.0
72.5°	5.0
75°	4.0
77.5°	3.0
80°	3.0
82.5°	2.0
85°	1.0
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)