

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886345

Luminaire Tested: ML204LSFL9FS1E-TIR1D40FL-TL2RDSLb-550LM-2700K

Issue Date: 6/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P886345
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-81)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML204LSFL9FS1E-TIR1D40FL-TL2RDSL B-550LM-2700K
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, METALLIC SILVER BAFFLED TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 594.5 lumens
Efficiency: N/A
Efficacy: 75.3 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.68
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886345

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDSL B-550LM-2700K

Luminous Intensity Polar Plot

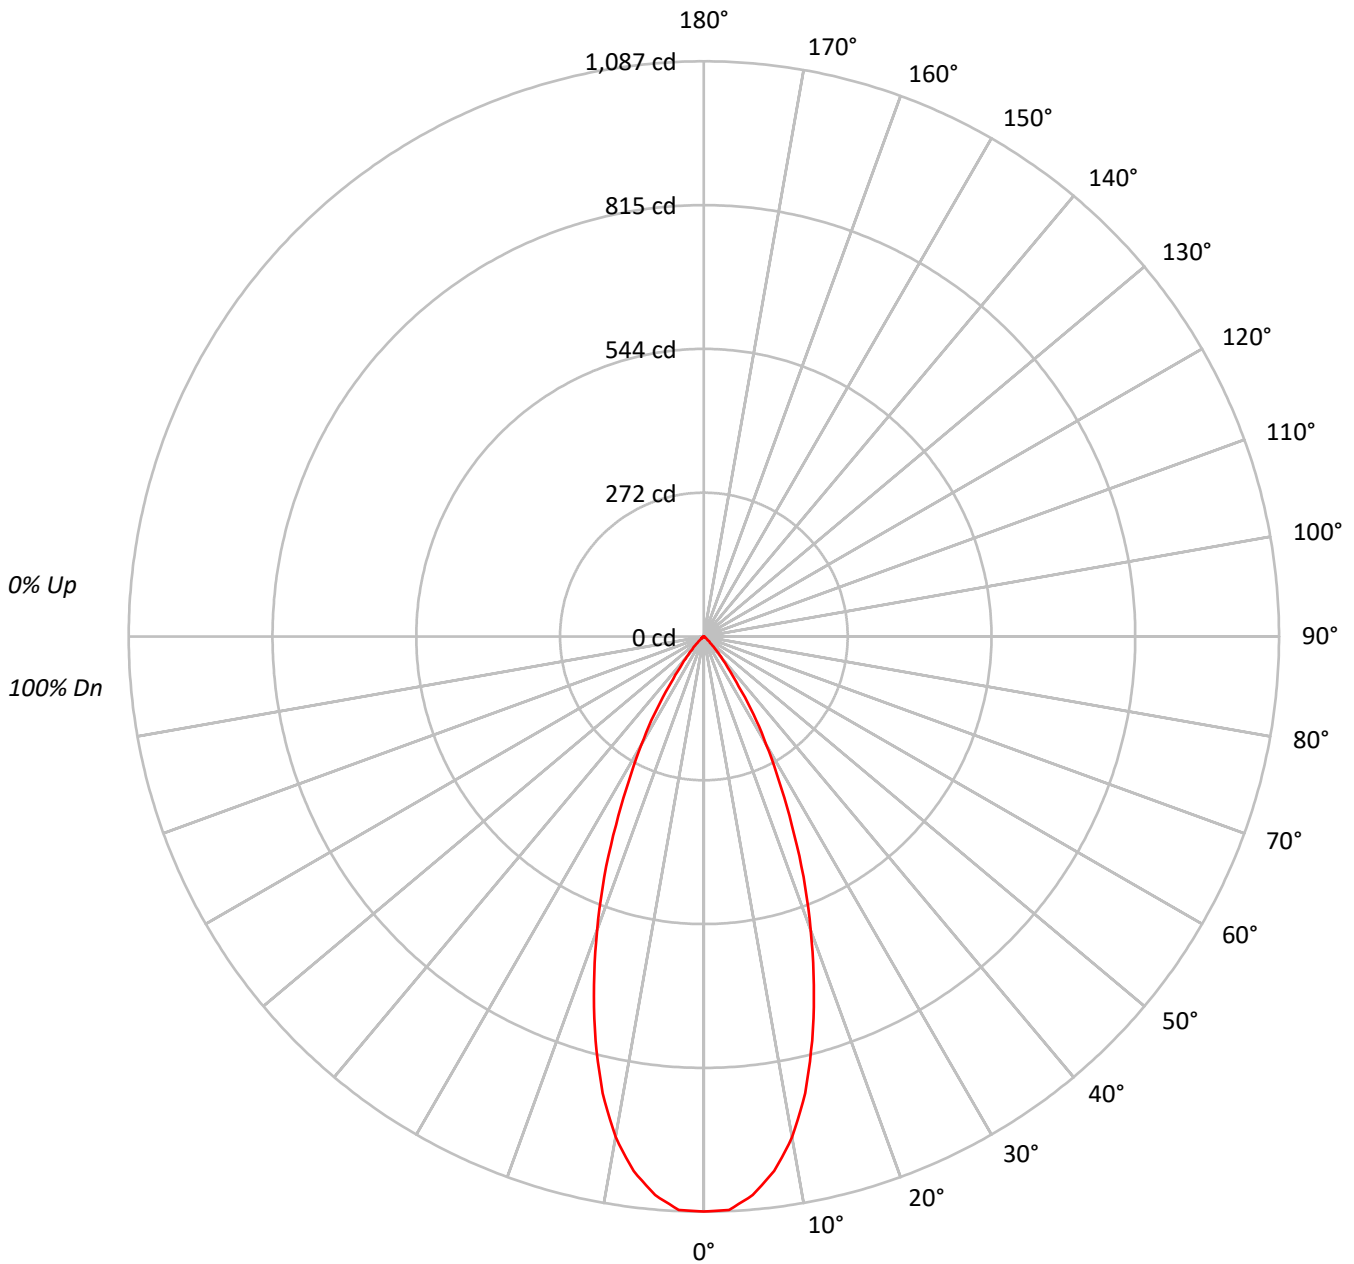



TEST NUMBER: P886345

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDSLb-550LM-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95		
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89		
3	104	99	94	91	103	97	93	90	95	91	89	92	90	87	90	88	86	84		
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80		
5	96	88	83	79	94	87	83	79	86	81	78	84	80	78	83	79	77	76		
6	92	84	78	75	90	83	78	74	82	77	74	80	76	73	79	76	73	72		
7	88	80	74	71	87	79	74	70	78	73	70	77	73	70	76	72	69	68		
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	72	69	66	65		
9	81	72	67	64	80	72	67	64	71	67	63	70	66	63	69	66	63	62		
10	78	69	64	61	77	69	64	61	68	64	60	67	63	60	67	63	60	59		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	536156
5°	524831
10°	481352
15°	403928
20°	309723
25°	213889
30°	134394
35°	69265
40°	32203
45°	12559
50°	5373
55°	2581
60°	1974
65°	1167
70°	1443
75°	1906
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12559 cd/sqm



TEST NUMBER: P886345

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDSLb-550LM-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	16.5
10°-20°	217.1	36.5
20°-30°	180.7	30.4
30°-40°	77.3	13.0
40°-50°	16.5	2.8
50°-60°	3.2	0.5
60°-70°	1.1	0.2
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	495.8	83.4
0°-40°	573.1	96.4
0°-60°	592.7	99.7
0°-90°	594.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	594.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1087	
5°	1060	98
15°	791	217
25°	393	181
35°	115	77
45°	18	16
55°	3	3
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P886345
CATALOG NUMBER: ML204LSFL9FS1E-TIR1D40FL-TL2RDSL B-550LM-2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1086.7
2.5°	1084.7
5°	1059.7
7.5°	1018.8
10°	960.8
12.5°	883.8
15°	790.8
17.5°	690.8
20°	589.9
22.5°	491.9
25°	392.9
27.5°	305.9
30°	235.9
32.5°	175.0
35°	115.0
37.5°	74.0
40°	50.0
42.5°	32.0
45°	18.0
47.5°	9.0
50°	7.0
52.5°	5.0
55°	3.0
57.5°	2.0
60°	2.0
62.5°	1.0
65°	1.0
67.5°	1.0
70°	1.0
72.5°	1.0
75°	1.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)