

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886392

Luminaire Tested: ML204LSFL9FS1E-TIR1D55WFL-TL2RDMW-550LM-3500K

Issue Date: 6/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P886392
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-83)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 6/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML204LSFL9FS1E-TIR1D55WFL-TL2RDMW-550LM-3500K
Description: 2IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE WHITE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 612.8 lumens
Efficiency: N/A
Efficacy: 77.6 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.82
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886392

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D55WFL-TL2RDMW-550LM-3500K

Luminous Intensity Polar Plot

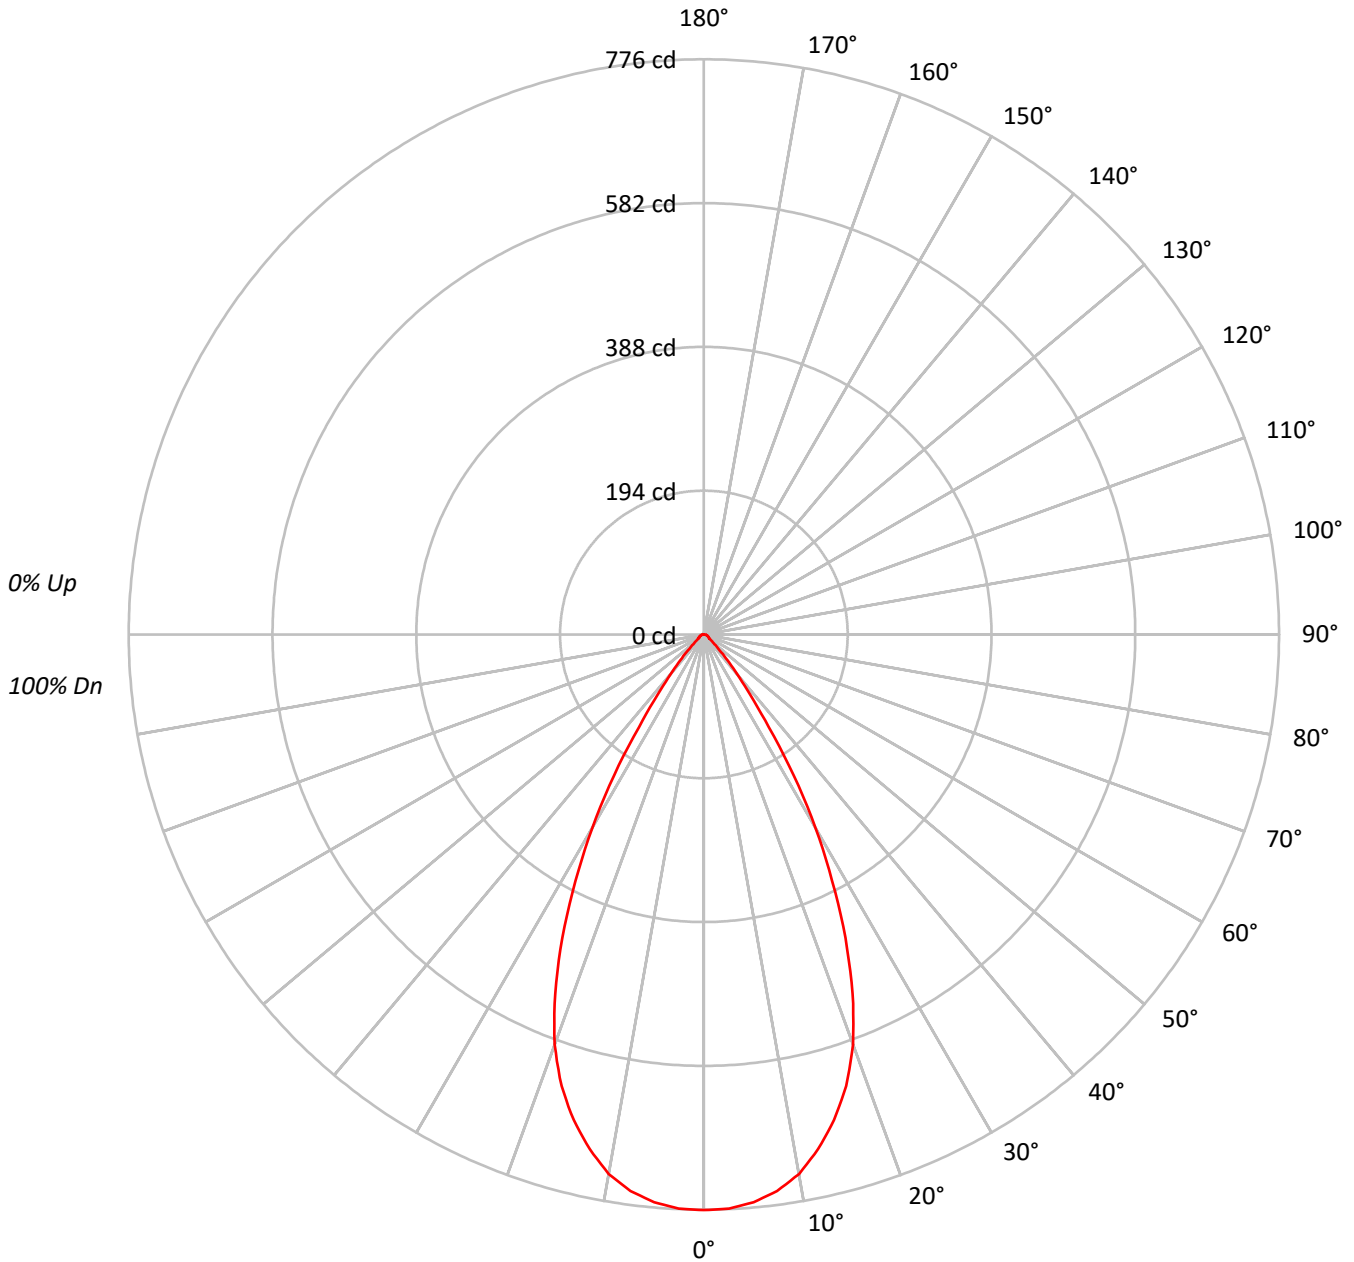



TEST NUMBER: P886392

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D55WFL-TL2RDMW-550LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76			
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	73	71			
6	88	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	60	59			
9	77	67	62	58	76	67	62	58	66	61	58	65	61	57	64	60	57	56			
10	73	64	58	55	72	64	58	55	63	58	54	62	58	54	61	57	54	53			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	383109
5°	380858
10°	370282
15°	346414
20°	308988
25°	245953
30°	171595
35°	91972
40°	44698
45°	20863
50°	10669
55°	7312
60°	7401
65°	7472
70°	7645
75°	8197
80°	9092
85°	6227

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20863 cd/sqm



TEST NUMBER: P886392

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D55WFL-TL2RDMW-550LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	11.8
10°-20°	188.6	30.8
20°-30°	203.9	33.3
30°-40°	101.5	16.6
40°-50°	26.1	4.3
50°-60°	8.3	1.4
60°-70°	6.1	1.0
70°-80°	4.2	0.7
80°-90°	1.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	465.0	75.9
0°-40°	566.5	92.4
0°-60°	600.9	98.1
0°-90°	612.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	612.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	776	
5°	769	72
15°	678	189
25°	452	204
35°	153	102
45°	30	26
55°	8	8
65°	6	6
75°	4	4
85°	1	2
90°	0	



TEST NUMBER: P886392

CATALOG NUMBER: ML204LSFL9FS1E-TIR1D55WFL-TL2RDMW-550LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	776.5
2.5°	775.4
5°	769.0
7.5°	757.2
10°	739.1
12.5°	711.3
15°	678.2
17.5°	638.7
20°	588.5
22.5°	524.4
25°	451.8
27.5°	374.9
30°	301.2
32.5°	225.4
35°	152.7
37.5°	101.5
40°	69.4
42.5°	47.0
45°	29.9
47.5°	19.2
50°	13.9
52.5°	10.7
55°	8.5
57.5°	7.5
60°	7.5
62.5°	6.4
65°	6.4
67.5°	5.3
70°	5.3
72.5°	4.3
75°	4.3
77.5°	3.2
80°	3.2
82.5°	2.1
85°	1.1
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)