

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P300483

Luminaire Tested: **ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P300483
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1902-156-63)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW
Description: ML4 2700K, 900LM DIM-TO-WARM, 15 DEG SP OPTIC, WITH ROUND/SQUARE PINHOLE MATTE WHITE FLANGE
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 483.0 lumens
Efficiency: N/A
Efficacy: 43.1 lumens/watt
Spacing Criteria (0/90/45): 0.32 / 0.32 / 0.32
Luminous Opening: Circular (Dia: 0.19' x H: 0')
CIE Type: Direct


Input Watts (W): 11.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P300483

CATALOG NUMBER: ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW

Luminous Intensity Polar Plot

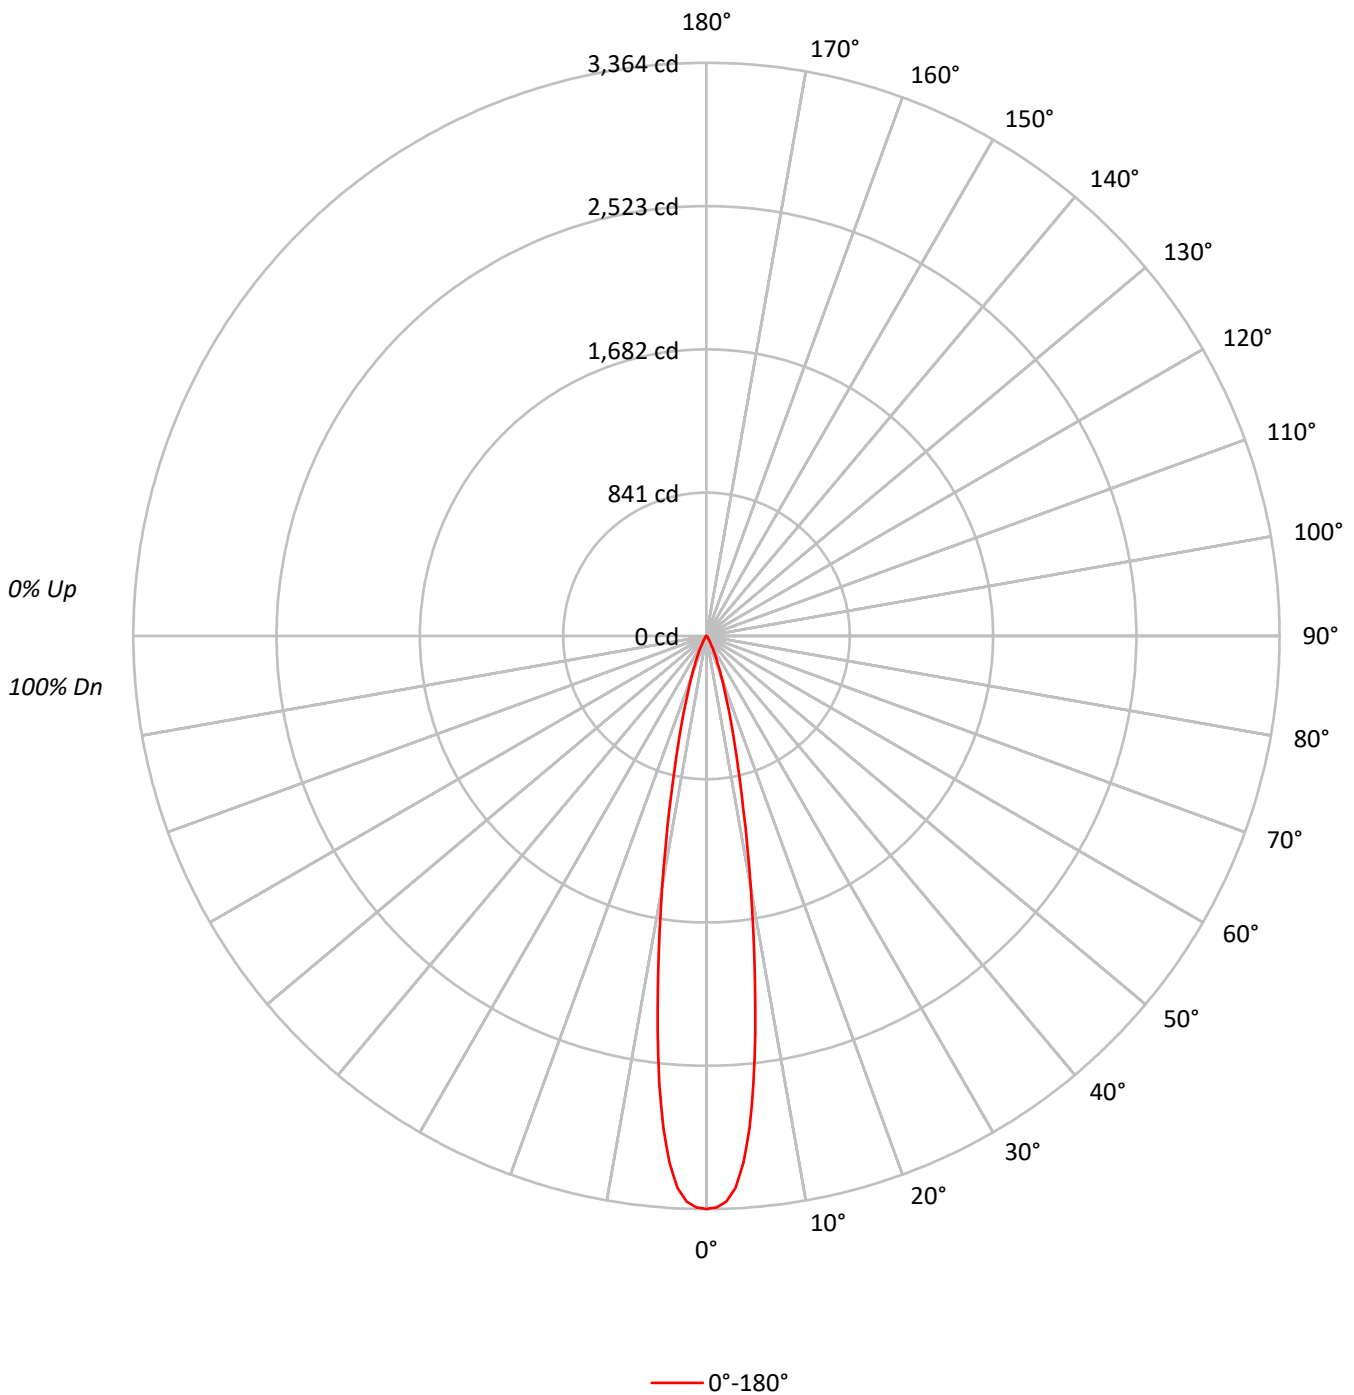



TEST NUMBER: P300483

CATALOG NUMBER: ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92
4	106	101	97	94	104	100	97	94	98	95	93	96	94	92	94	92	91	90
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	92	90	89	88
6	101	95	91	88	99	94	91	88	93	90	88	92	89	87	91	88	86	86
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	85	84
8	96	90	86	84	95	90	86	84	89	85	83	88	85	83	87	85	83	82
9	94	88	84	82	93	87	84	82	87	84	81	86	83	81	85	83	81	80
10	92	86	82	80	91	86	82	80	85	82	80	84	81	79	84	81	79	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1311318
5°	1135106
10°	591909
15°	246630
20°	106243
25°	46454
30°	19356
35°	9994
40°	5598
45°	2757
50°	1213
55°	680
60°	780
65°	922
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P300483

CATALOG NUMBER: ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	227.2	47.0
10°-20°	181.5	37.6
20°-30°	54.3	11.2
30°-40°	14.1	2.9
40°-50°	4.1	0.8
50°-60°	1.2	0.3
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	463.0	95.9
0°-40°	477.1	98.8
0°-60°	482.4	99.9
0°-90°	483.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	483.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3364	
5°	2901	227
15°	611	181
25°	108	54
35°	21	14
45°	5	4
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P300483

CATALOG NUMBER: ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3363.8
1°	3354.8
2°	3322.8
3°	3243.8
4°	3099.7
5°	2900.7
6°	2641.6
7°	2345.5
8°	2043.5
9°	1754.4
10°	1495.3
11°	1256.3
12°	1048.2
13°	872.2
14°	734.2
15°	611.1
17.5°	391.1
20°	256.1
22.5°	167.0
25°	108.0
27.5°	69.0
30°	43.0
32.5°	29.0
35°	21.0
37.5°	15.0
40°	11.0
42.5°	7.0
45°	5.0
47.5°	3.0
50°	2.0
52.5°	2.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P300483

CATALOG NUMBER: ML4D09_27D2WE - TIR45SP15 - TL41RMW - TL42SMW

CANDELA DISTRIBUTION (continued):

90° | $\frac{0^\circ}{0.0}$

(END OF REPORT)