

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: HALO

Report Number: P601382

Luminaire Tested: **ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K**

Issue Date: 7/29/2022

Tested By:

Approved By:



Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2005 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor. Information related to the luminaire tested has been supplied by requestor and can affect the validity of the test results. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Lighting Laboratory. Test performed at address noted above.

**Test Information**

Test Method: LM-79-08  
 Report Number: P601382  
 Test Lab: COOPER LIGHTING SOLUTIONS  
 Issue Date: 7/29/2022  
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
 Product Line: HALO  
 Catalog Number: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K  
 Description: DIRECT MOUNT, 25D WW OPTIC, OPEN TRIM  
 Light Source: (1) SELECTABLE LUMEN LED 95CRI / 2700K CCT  
 Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
 Luminaire Lumens: 592.3 lumens  
 Efficiency: N/A  
 Efficacy: 57.5 lumens/watt  
 Spacing Criteria (0/90/45): 1.31 / 0.61 / 0.81  
 Luminous Opening: Circular (Dia: 0.21' x H: 0')  
 CIE Type: Direct


Input Watts (W): 10.3  
 Input Voltage (V): NR  
 Input Current (Ain): NR  
 Voltage Rise (V): NR  
 Power Factor: NR  
 Total Harmonic Distortion (THDi): NR  
 Frequency (hertz): 60  
 Stabilization Time: NR  
 Operation Time: NR  
 Ambient Temperature (°C): NR  
 Test Distance: 25 FT



Meas			
Instrument	Identificatio		Calibration Due Date
Photometer	GONIO 1 11111111	4/22/2021	10/22/2021
Power Meter	XITRON 2801 IN0197	12/1/2020	12/1/2021
AC Power Source	CHROMA 61505 IN0196	12/1/2020	12/1/2021
DC Power Supply	AGILENT E3634A IN0198	11/30/2020	11/30/2021
Room Thermometer	ONSET IN0143	12/1/2020	12/1/2021

TEST NUMBER: P601382  
CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K

### Luminous Intensity Polar Plot

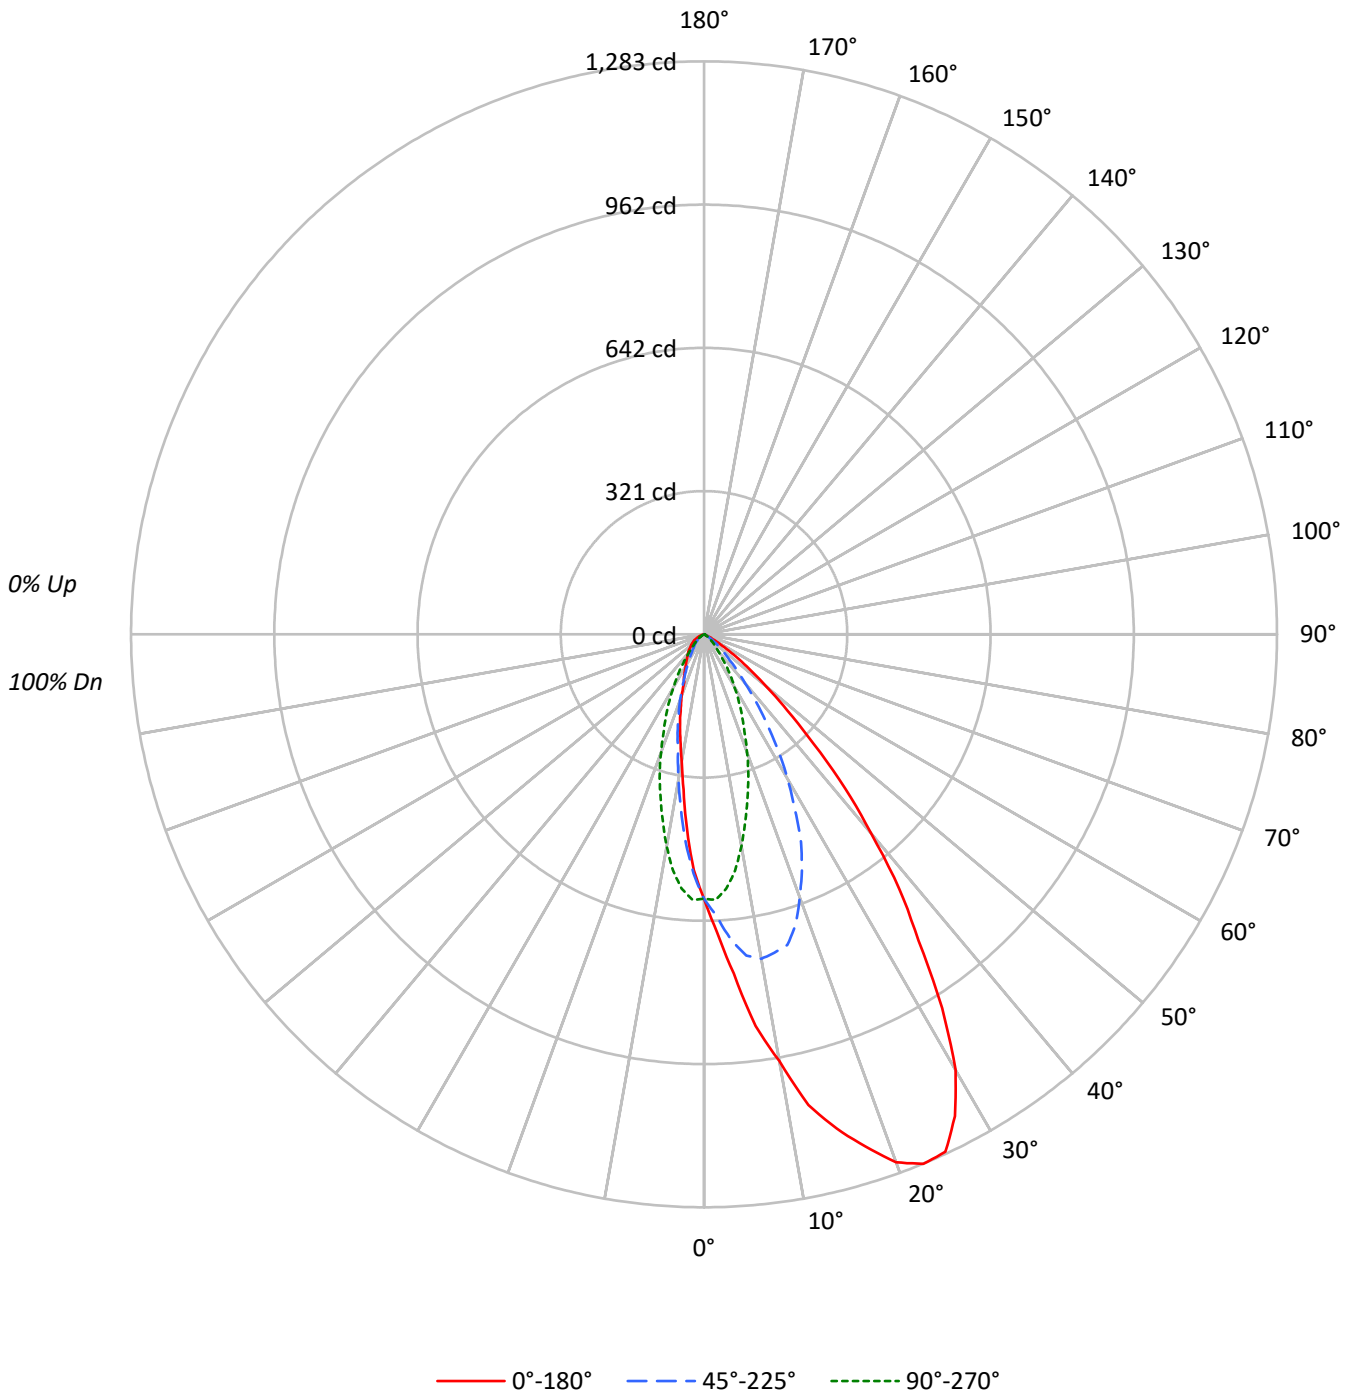

TEST NUMBER: P601382  
 CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66
6	85	75	69	64	83	75	68	64	73	68	64	72	67	63	70	66	63	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53
9	72	62	56	51	71	61	55	51	60	55	51	60	54	51	59	54	51	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	186996	186996	186996
5°	241564	181244	139087
10°	310953	154386	92151
15°	374469	122818	67898
20°	422760	94593	49262
25°	445440	70030	36862
30°	410592	49916	29716
35°	322568	33691	25827
40°	239696	20404	22795
45°	154777	13888	20363
50°	90585	10021	18127
55°	48115	6937	16020
60°	20209	3663	14083
65°	7247	2914	10909
70°	923	1754	6278
75°	1220	1220	0
80°	0	0	0
85°	0	0	0

TEST NUMBER: P601382  
 CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	54.6	9.2
10°-20°	141.3	23.9
20°-30°	172.7	29.2
30°-40°	129.3	21.8
40°-50°	64.1	10.8
50°-60°	23.6	4.0
60°-70°	5.9	1.0
70°-80°	0.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	368.6	62.2
0°-40°	497.9	84.1
0°-60°	585.6	98.9
0°-90°	592.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	592.3	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	592	592	592	592	592	
5°	762	685	572	469	439	80
15°	1146	720	376	228	208	326
25°	1278	514	201	101	106	573
35°	837	247	87	47	67	527
45°	347	81	31	26	46	276
55°	87	22	13	11	29	83
65°	10	3	4	4	15	12
75°	1	1	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P601382

CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	45°	67.5°	90°	112.5°	135°
0°	592.2	592.2	592.2	592.2	592.2	592.2	592.2	592.2	592.2	592.2	592.2
2.5°	666.9	666.9	674.7	662.1	662.1	658.2	630.0	613.5	595.1	567.9	535.9
5°	762.1	781.5	765.9	744.6	757.2	751.4	685.4	625.2	571.8	519.4	468.9
7.5°	884.4	889.2	875.6	848.5	842.6	838.8	725.2	626.2	533.0	454.3	396.1
10°	969.8	976.6	970.8	961.1	928.1	920.3	737.8	589.3	481.5	398.0	328.1
12.5°	1079.5	1077.6	1068.8	1040.7	1002.8	992.1	730.0	556.3	427.1	334.9	268.9
15°	1145.5	1157.2	1144.6	1069.8	1052.3	1025.1	720.3	511.6	375.7	290.3	228.1
17.5°	1202.8	1197.9	1173.7	1126.1	1081.4	1057.2	682.5	446.6	330.1	241.7	188.3
20°	1258.1	1259.1	1221.2	1163.0	1091.2	1047.5	626.2	401.9	281.5	199.0	156.3
22.5°	1283.4	1281.4	1232.9	1146.5	1063.0	1018.3	572.8	351.4	235.9	161.1	125.2
25°	1278.5	1243.6	1211.5	1109.6	1015.4	961.1	513.5	307.7	201.0	135.9	101.0
27.5°	1216.4	1198.9	1144.6	1042.6	933.9	878.6	439.8	263.1	167.9	106.8	82.5
30°	1126.1	1105.7	1040.7	956.2	813.5	769.8	374.7	215.5	136.9	91.3	68.0
32.5°	992.1	976.6	909.6	799.0	687.3	637.8	310.6	171.8	110.7	67.0	55.3
35°	836.8	835.8	776.6	686.3	569.8	519.4	246.6	137.9	87.4	53.4	46.6
37.5°	718.4	693.1	634.9	551.4	453.4	411.6	193.2	107.8	65.0	41.7	38.8
40°	581.5	570.8	509.7	438.8	352.4	321.3	142.7	80.6	49.5	34.0	34.9
42.5°	467.9	453.4	402.9	333.9	272.8	247.5	108.7	62.1	38.8	29.1	31.1
45°	346.6	339.8	310.6	248.5	201.9	184.4	80.6	48.5	31.1	24.3	26.2
47.5°	252.4	244.6	224.3	184.4	146.6	135.9	62.1	37.9	25.2	19.4	20.4
50°	184.4	179.6	166.0	134.0	107.8	99.0	46.6	29.1	20.4	15.5	17.5
52.5°	127.2	129.1	117.5	95.1	76.7	70.9	34.9	21.4	16.5	12.6	14.6
55°	87.4	85.4	80.6	62.1	49.5	45.6	22.3	14.6	12.6	9.7	10.7
57.5°	53.4	53.4	49.5	38.8	31.1	29.1	13.6	9.7	8.7	6.8	8.7
60°	32.0	32.0	27.2	22.3	18.4	16.5	7.8	5.8	5.8	4.9	6.8
62.5°	17.5	17.5	15.5	12.6	9.7	8.7	4.9	4.9	3.9	3.9	5.8
65°	9.7	8.7	7.8	5.8	4.9	4.9	2.9	3.9	3.9	3.9	3.9
67.5°	3.9	3.9	3.9	2.9	2.9	2.9	1.9	2.9	2.9	2.9	2.9
70°	1.0	1.9	1.9	1.9	1.0	1.0	1.9	1.9	1.9	1.9	1.9
72.5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
75°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.0	1.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P601382  
 CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL41R\_ TL42S\_ 2700K

**CANDELA DISTRIBUTION (continued):**

	157.5°	180°
0°	592.2	592.2
2.5°	536.8	528.1
5°	449.5	438.8
7.5°	357.2	350.5
10°	292.2	287.4
12.5°	246.6	243.7
15°	208.7	207.7
17.5°	175.7	172.8
20°	143.7	146.6
22.5°	118.4	116.5
25°	100.0	105.8
27.5°	85.4	93.2
30°	74.8	81.5
32.5°	64.1	74.8
35°	56.3	67.0
37.5°	50.5	60.2
40°	46.6	55.3
42.5°	40.8	51.5
45°	35.9	45.6
47.5°	31.1	40.8
50°	28.2	36.9
52.5°	24.3	33.0
55°	20.4	29.1
57.5°	18.4	26.2
60°	15.5	22.3
62.5°	11.6	18.4
65°	8.7	14.6
67.5°	5.8	10.7
70°	2.9	6.8
72.5°	1.0	1.9
75°	0.0	0.0
77.5°	0.0	0.0
80°	0.0	0.0
82.5°	0.0	0.0
85°	0.0	0.0
87.5°	0.0	0.0
90°	0.0	0.0

(END OF REPORT)