

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO

Report Number: P601396

Luminaire Tested: **ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K**

Issue Date: 7/29/2022

Tested By:

Approved By:



Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2005 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor. Information related to the luminaire tested has been supplied by requestor and can affect the validity of the test results. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Lighting Laboratory. Test performed at address noted above.

Test Information

Test Method: LM-79-08
 Report Number: P601396
 Test Lab: COOPER LIGHTING SOLUTIONS
 Issue Date: 7/29/2022
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
 Product Line: HALO
 Catalog Number: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K
 Description: DIRECT MOUNT, 25D WW OPTIC, LINEAR SPREAD LENS TRIM
 Light Source: (1) SELECTABLE LUMEN LED 95CRI / 5000K CCT
 Ballast/Driver: -

Summary

Lumens per Lamp: N/A
 Luminaire Lumens: 802.5 lumens
 Efficiency: N/A
 Efficacy: 77.9 lumens/watt
 Spacing Criteria (0/90/45): 1.21 / 0.78 / 1
 Luminous Opening: Circular (Dia: 0.21' x H: 0')
 CIE Type: Direct


Input Watts (W): 10.3
 Input Voltage (V): NR
 Input Current (Ain): NR
 Voltage Rise (V): NR
 Power Factor: NR
 Total Harmonic Distortion (THDi): NR
 Frequency (hertz): 60
 Stabilization Time: NR
 Operation Time: NR
 Ambient Temperature (°C): NR
 Test Distance: 25 FT



Meas		Calibration Due Date	
Instrument	Identificatio		
Photometer	GONIO 1 11111111	4/22/2021	10/22/2021
Power Meter	XITRON 2801 IN0197	12/1/2020	12/1/2021
AC Power Source	CHROMA 61505 IN0196	12/1/2020	12/1/2021
DC Power Supply	AGILENT E3634A IN0198	11/30/2020	11/30/2021
Room Thermometer	ONSET IN0143	12/1/2020	12/1/2021

TEST NUMBER: P601396
CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K

Luminous Intensity Polar Plot

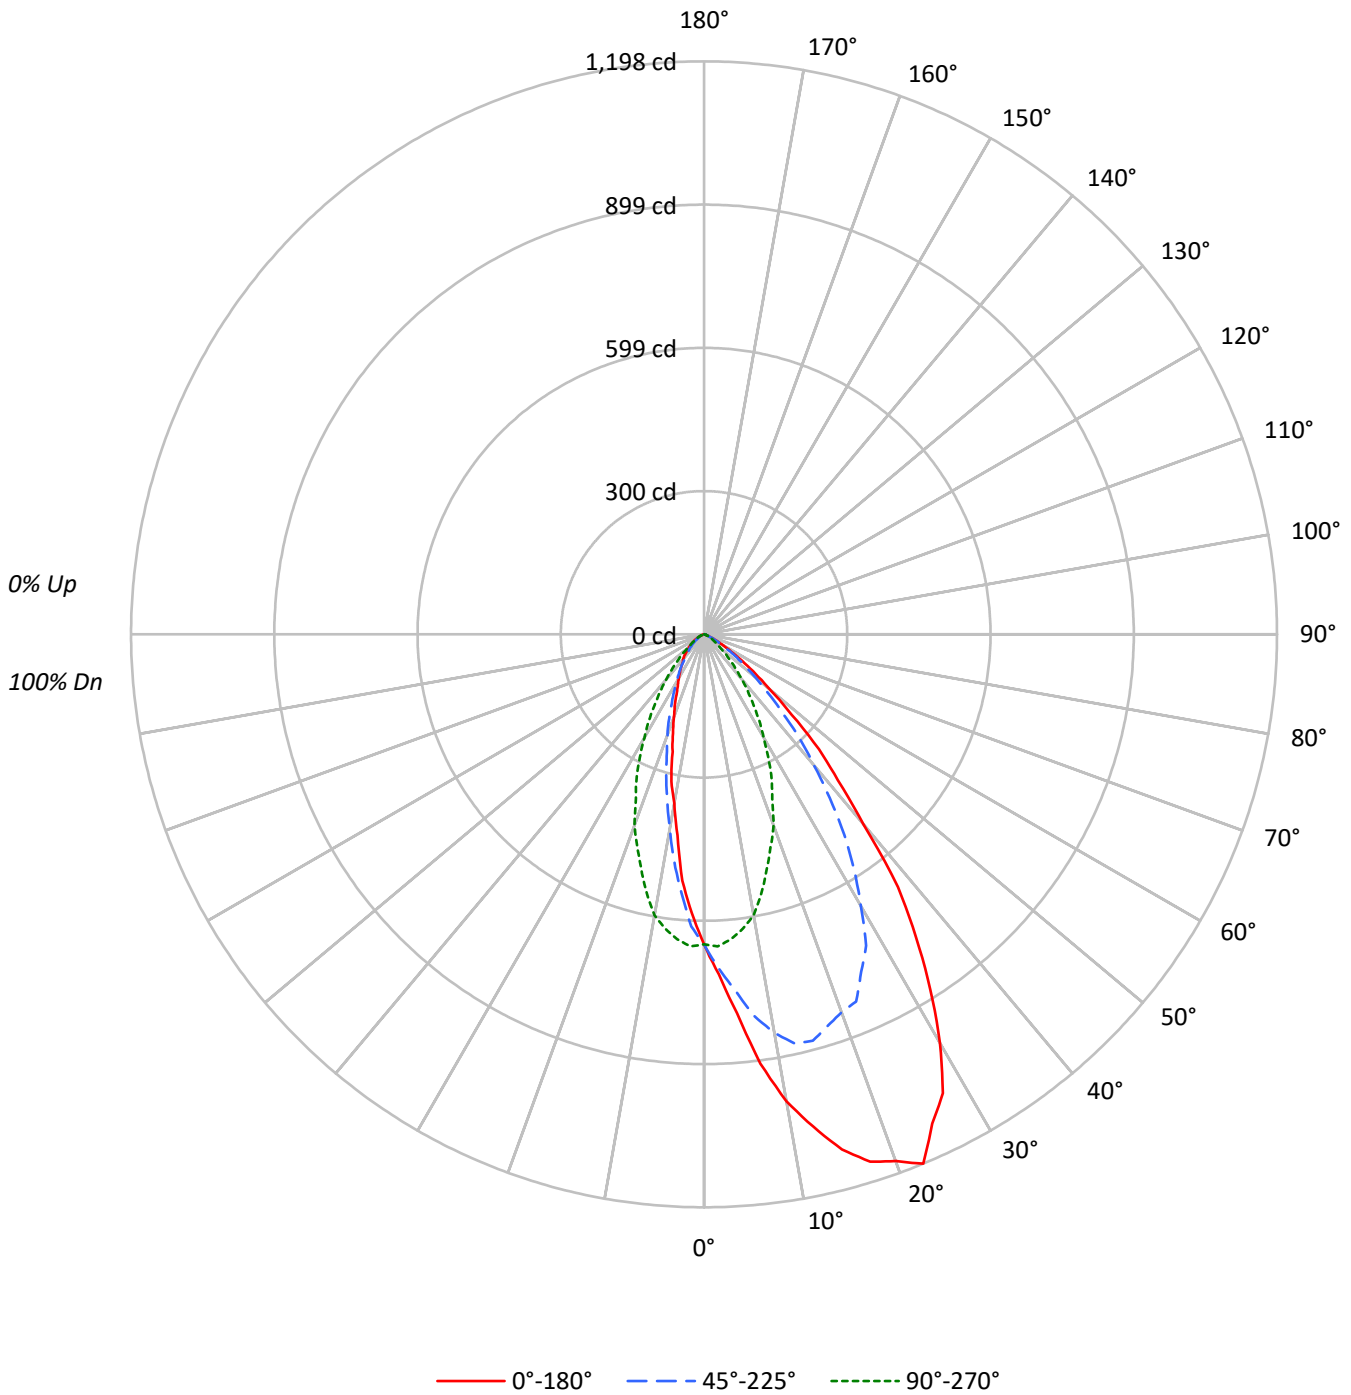

TEST NUMBER: P601396

CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76
4	94	85	79	74	92	84	78	73	82	76	72	79	75	72	78	74	71	69
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	63
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49
9	70	59	52	48	68	58	52	48	57	52	47	56	51	47	55	51	47	46
10	66	55	49	44	65	55	48	44	54	48	44	53	48	44	52	47	44	42

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	204679	204679	204679
5°	252119	202925	163969
10°	317751	191260	115076
15°	364629	165937	82968
20°	393828	142880	61393
25°	393144	116577	46756
30°	359546	90789	38321
35°	297859	69155	31763
40°	213892	50660	27989
45°	151607	34653	23087
50°	88964	22253	19060
55°	53400	15139	15139
60°	28608	11241	11241
65°	15690	8443	7247
70°	8955	6001	4432
75°	3904	3904	0
80°	2909	2909	0
85°	0	0	0

TEST NUMBER: P601396
 CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.4	7.7
10°-20°	167.1	20.8
20°-30°	218.5	27.2
30°-40°	187.3	23.3
40°-50°	107.1	13.4
50°-60°	43.8	5.5
60°-70°	14.0	1.7
70°-80°	3.0	0.4
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	447.0	55.7
0°-40°	634.3	79.0
0°-60°	785.3	97.8
0°-90°	802.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	802.5	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	648	648	648	648	648	
5°	795	747	640	542	517	82
15°	1115	879	508	306	254	315
25°	1128	778	335	160	134	516
35°	773	511	179	84	82	477
45°	340	231	78	42	52	258
55°	97	79	28	19	28	92
65°	21	18	11	8	10	23
75°	3	3	3	2	0	4
85°	0	0	0	0	0	1
90°	0	0	0	0	0	

TEST NUMBER: P601396

CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	45°	67.5°	90°	112.5°	135°
0°	648.2	648.2	648.2	648.2	648.2	648.2	648.2	648.2	648.2	648.2	648.2
2.5°	711.3	725.8	721.0	729.1	727.5	712.9	698.4	675.7	653.1	640.2	611.1
5°	795.4	813.1	826.1	816.4	811.5	800.2	746.9	696.7	640.2	583.6	541.6
7.5°	905.3	900.4	915.0	885.9	887.5	882.6	805.1	708.1	620.8	538.3	478.5
10°	991.0	976.4	991.0	981.3	961.9	939.2	845.5	703.2	596.5	493.1	412.2
12.5°	1054.0	1073.4	1073.4	1050.8	1031.4	1005.5	876.2	700.0	554.5	438.1	355.6
15°	1115.4	1121.9	1110.6	1092.8	1073.4	1020.1	879.4	679.0	507.6	384.7	305.5
17.5°	1155.8	1157.5	1152.6	1136.5	1109.0	1076.6	858.4	659.6	464.0	342.7	257.0
20°	1172.0	1159.1	1157.5	1128.4	1104.1	1075.0	840.6	612.7	425.2	292.6	223.1
22.5°	1197.9	1167.2	1167.2	1138.1	1088.0	1083.1	830.9	559.3	371.8	250.6	190.8
25°	1128.4	1123.5	1133.2	1092.8	1054.0	1045.9	777.6	518.9	334.6	216.6	160.0
27.5°	1081.5	1068.6	1055.6	1029.8	992.6	973.2	733.9	467.2	291.0	181.1	135.8
30°	986.1	986.1	969.9	957.0	906.9	892.3	656.3	418.7	249.0	155.2	113.2
32.5°	881.0	866.5	868.1	853.6	822.8	811.5	583.6	365.3	215.0	126.1	98.6
35°	772.7	756.6	748.5	737.2	732.3	696.7	510.8	315.2	179.4	109.9	84.1
37.5°	666.0	649.9	643.4	625.6	599.7	591.7	431.6	261.9	150.3	90.5	69.5
40°	518.9	518.9	517.3	497.9	489.8	485.0	357.3	218.2	122.9	72.7	59.8
42.5°	413.8	418.7	415.5	407.4	389.6	386.4	297.4	177.8	100.2	61.4	50.1
45°	339.5	324.9	321.7	320.1	310.4	308.8	231.2	140.6	77.6	50.1	42.0
47.5°	249.0	247.3	250.6	242.5	231.2	240.9	182.7	106.7	61.4	40.4	35.6
50°	181.1	184.3	184.3	176.2	173.0	176.2	140.6	80.8	45.3	32.3	30.7
52.5°	135.8	134.2	132.6	134.2	132.6	132.6	105.1	59.8	35.6	25.9	24.2
55°	97.0	97.0	95.4	98.6	100.2	97.0	79.2	43.6	27.5	21.0	19.4
57.5°	67.9	67.9	64.7	67.9	67.9	71.1	56.6	32.3	22.6	16.2	16.2
60°	45.3	45.3	45.3	46.9	48.5	48.5	38.8	22.6	17.8	12.9	12.9
62.5°	30.7	30.7	30.7	32.3	32.3	35.6	27.5	17.8	14.5	11.3	9.7
65°	21.0	21.0	21.0	21.0	22.6	22.6	17.8	12.9	11.3	9.7	8.1
67.5°	12.9	14.5	12.9	14.5	14.5	14.5	11.3	9.7	8.1	6.5	4.8
70°	9.7	9.7	9.7	9.7	9.7	9.7	8.1	8.1	6.5	4.8	3.2
72.5°	6.5	6.5	6.5	6.5	6.5	6.5	4.8	4.8	4.8	3.2	3.2
75°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	1.6	1.6
77.5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0
80°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	0.0
82.5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P601396
 CATALOG NUMBER: ML4DM08LSAWW95FS1E - TIR4D25AWW - TL45R6G_ TL46S6G_ 5000K

CANDELA DISTRIBUTION (continued):

	157.5°	180°
0°	648.2	648.2
2.5°	594.9	583.6
5°	504.4	517.3
7.5°	439.7	423.5
10°	368.6	358.9
12.5°	320.1	315.2
15°	265.1	253.8
17.5°	227.9	216.6
20°	190.8	182.7
22.5°	163.3	158.4
25°	140.6	134.2
27.5°	121.2	118.0
30°	105.1	105.1
32.5°	90.5	93.8
35°	80.8	82.4
37.5°	69.5	72.7
40°	64.7	67.9
42.5°	55.0	61.4
45°	46.9	51.7
47.5°	40.4	45.3
50°	33.9	38.8
52.5°	30.7	33.9
55°	25.9	27.5
57.5°	21.0	22.6
60°	16.2	17.8
62.5°	12.9	14.5
65°	9.7	9.7
67.5°	6.5	8.1
70°	3.2	4.8
72.5°	1.6	1.6
75°	1.6	0.0
77.5°	0.0	0.0
80°	0.0	0.0
82.5°	0.0	0.0
85°	0.0	0.0
87.5°	0.0	0.0
90°	0.0	0.0

(END OF REPORT)