

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886596

Luminaire Tested: ML310LSFL95FS1E-TIR4D40FL-TL3RDSL-850LM-5000K

Issue Date: 7/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P886596
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML310LSFL95FS1E-TIR4D40FL-TL3RDSL-850LM-5000K
Description: 3IN ROUND ML FLEX, SELECTABLE CCT, WITH 40D TIR, METALLIC SILVER TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1272.1 lumens
Efficiency: N/A
Efficacy: 93.5 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886596
CATALOG NUMBER: ML310LSFL95FS1E-TIR4D40FL-TL3RDSL-850LM-5000K

Luminous Intensity Polar Plot

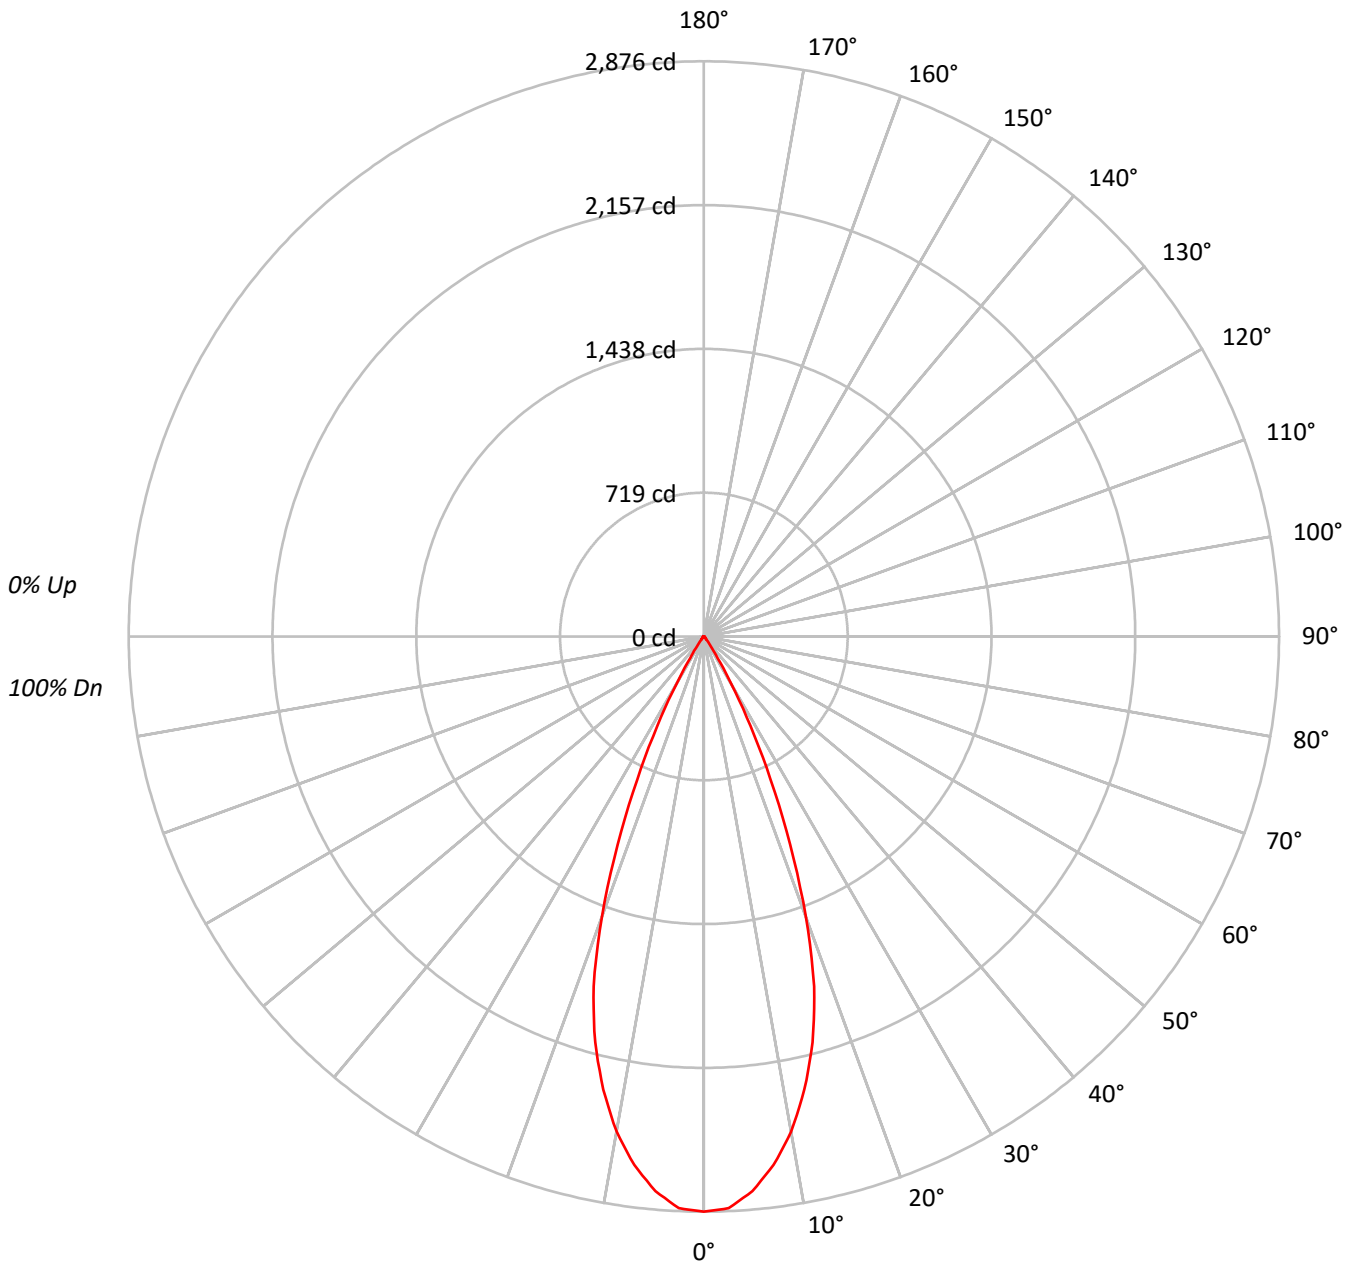



TEST NUMBER: P886596

CATALOG NUMBER: ML310LSFL95FS1E-TIR4D40FL-TL3RDSL-850LM-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95				95															
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	95	94	92	91				91															
3	106	100	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87				87															
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83				83															
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79				79															
6	94	87	82	79	93	87	82	79	85	81	78	84	80	78	83	80	77	76				76															
7	91	84	79	75	90	83	78	75	82	78	75	81	77	75	80	77	74	73				73															
8	88	80	75	72	87	80	75	72	79	75	72	78	74	71	77	74	71	70				70															
9	85	77	72	69	84	77	72	69	76	72	69	75	71	69	74	71	68	67				67															
10	82	74	70	66	81	74	69	66	73	69	66	72	69	66	72	68	66	65				65															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	630673
5°	612677
10°	559754
15°	476779
20°	347604
25°	190269
30°	68238
35°	15499
40°	6326
45°	2946
50°	2524
55°	2409
60°	2763
65°	2750
70°	2693
75°	2711
80°	2652
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 82.5°
 Luminance: 3528 cd/sqm



TEST NUMBER: P886596

CATALOG NUMBER: ML310LSFL95FS1E-TIR4D40FL-TL3RDSL-850LM-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.1	20.2
10°-20°	570.7	44.9
20°-30°	364.7	28.7
30°-40°	54.7	4.3
40°-50°	8.8	0.7
50°-60°	6.0	0.5
60°-70°	5.2	0.4
70°-80°	3.6	0.3
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1192.5	93.7
0°-40°	1247.2	98.0
0°-60°	1262.0	99.2
0°-90°	1272.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1272.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2876	
5°	2783	257
15°	2100	571
25°	786	365
35°	58	55
45°	10	9
55°	6	6
65°	5	5
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P886596

CATALOG NUMBER: ML310LSFL95FS1E-TIR4D40FL-TL3RDSL-850LM-5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2876.1
2.5°	2861.3
5°	2783.4
7.5°	2665.5
10°	2513.9
12.5°	2321.3
15°	2100.2
17.5°	1834.9
20°	1489.6
22.5°	1126.4
25°	786.4
27.5°	503.2
30°	269.5
32.5°	127.4
35°	57.9
37.5°	34.7
40°	22.1
42.5°	13.7
45°	9.5
47.5°	8.4
50°	7.4
52.5°	7.4
55°	6.3
57.5°	6.3
60°	6.3
62.5°	5.3
65°	5.3
67.5°	5.3
70°	4.2
72.5°	4.2
75°	3.2
77.5°	3.2
80°	2.1
82.5°	2.1
85°	1.1
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)