

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886809

Luminaire Tested: ML310LSFLD2W1E-TIR4D55WFL-TL3RDMB-600LM-3000K

Issue Date: 7/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P886809
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-9)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML310LSFLD2W1E-TIR4D55WFL-TL3RDMB-600LM-3000K
Description: 3IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE BLACK TRIM
Light Source: (1) D2W LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 727.0 lumens
Efficiency: N/A
Efficacy: 76.5 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886809
CATALOG NUMBER: ML310LSFLD2W1E-TIR4D55WFL-TL3RDMB-600LM-3000K

Luminous Intensity Polar Plot

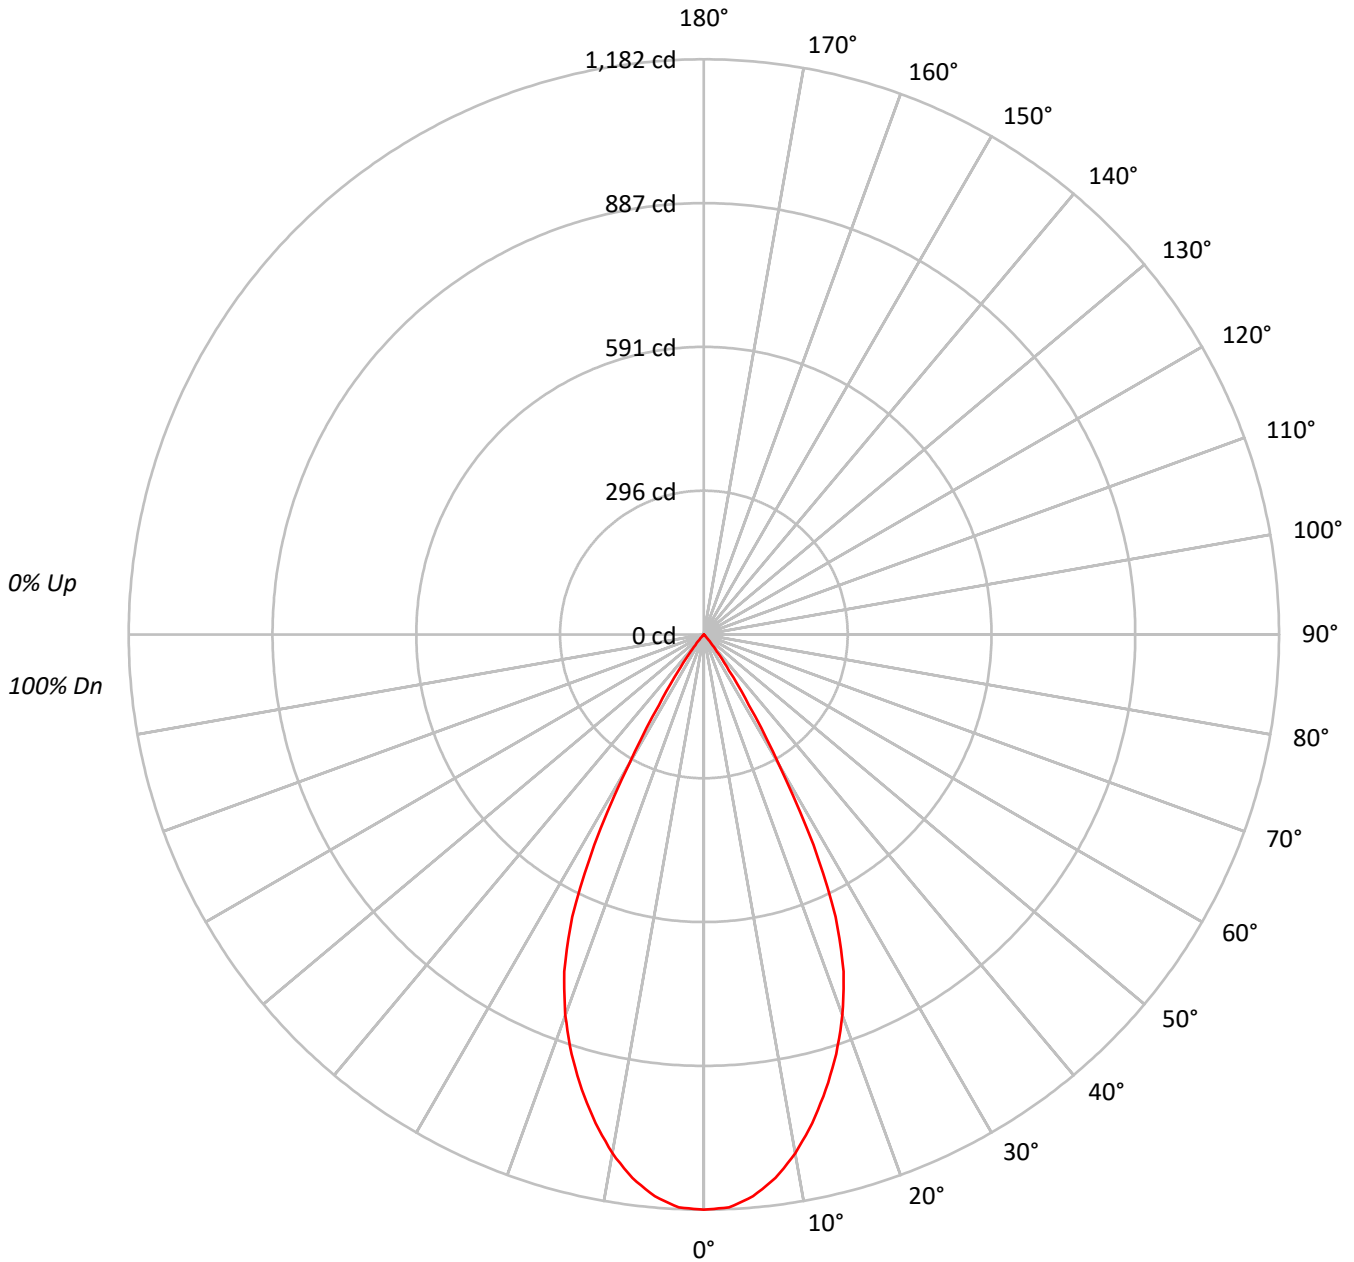



TEST NUMBER: P886809

CATALOG NUMBER: ML310LSFLD2W1E-TIR4D55WFL-TL3RDDB-600LM-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	104	100	98	100	98	96	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	89	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	84	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	70	69	69	69	69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
9	82	73	68	65	81	73	68	65	72	68	64	71	67	64	70	67	64	63	63	63	63
10	79	70	65	62	78	70	65	62	69	64	61	68	64	61	67	64	61	60	60	60	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	259190
5°	255117
10°	241055
15°	219820
20°	194244
25°	154944
30°	77379
35°	24253
40°	5038
45°	434
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 434 cd/sqm



TEST NUMBER: P886809

CATALOG NUMBER: ML310LSFLD2W1E-TIR4D55WFL-TL3RDMB-600LM-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.2	14.9
10°-20°	269.8	37.1
20°-30°	276.0	38.0
30°-40°	70.1	9.6
40°-50°	2.9	0.4
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	654.0	90.0
0°-40°	724.1	99.6
0°-60°	727.0	100.0
0°-90°	727.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	727.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1182	
5°	1159	108
15°	968	270
25°	640	276
35°	91	70
45°	1	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P886809

CATALOG NUMBER: ML310LSFLD2W1E-TIR4D55WFL-TL3RDMB-600LM-3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1182.0
2.5°	1178.6
5°	1159.0
7.5°	1126.5
10°	1082.6
12.5°	1028.5
15°	968.3
17.5°	904.1
20°	832.4
22.5°	749.9
25°	640.4
27.5°	487.5
30°	305.6
32.5°	172.4
35°	90.6
37.5°	43.3
40°	17.6
42.5°	4.7
45°	1.4
47.5°	0.7
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)