

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P85100

Luminaire Tested: **ELG405830SN(25 deg Beam-0deg tilt)**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P85100
Test Lab: INNOVATION CENTER P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: ELG405830SN(25 deg Beam-0deg tilt)
Description: HALO 4 INCH RECESSED FIXTURE WITH ROUND TUSCAN BRONZE(SATIN NICKEL) TRIM, TUSCAN BRONZE(SN) GIMBAL, NARROW UPPER REFLECTOR AND CLEAR LENS .
---ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING A 500 WATT, NIST TRACEABLE, OMNI-DIRECTIONAL LAB LUMEN STANDARD IN THE GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET----
Light Source: (1) SMT LED 3000K
(1) 221 14 WATTS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: 634 (1 lamp)
Luminaire Lumens: 637.4 lumens
Efficiency: 100.5%
Efficacy: 46.5 lumens/watt
Spacing Criteria (0/90/45): 0.37 / 0.37 / 0.41
Luminous Opening: Vertical Cylinder (Dia: 0.33' x H: 0.1')
CIE Type: Direct

Input Watts (W): 13.7
Input Voltage (V): NR
Input Current (Ain): 0.11966
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P85100
CATALOG NUMBER: ELG405830SN(25 deg Beam-0deg tilt)

Luminous Intensity Polar Plot

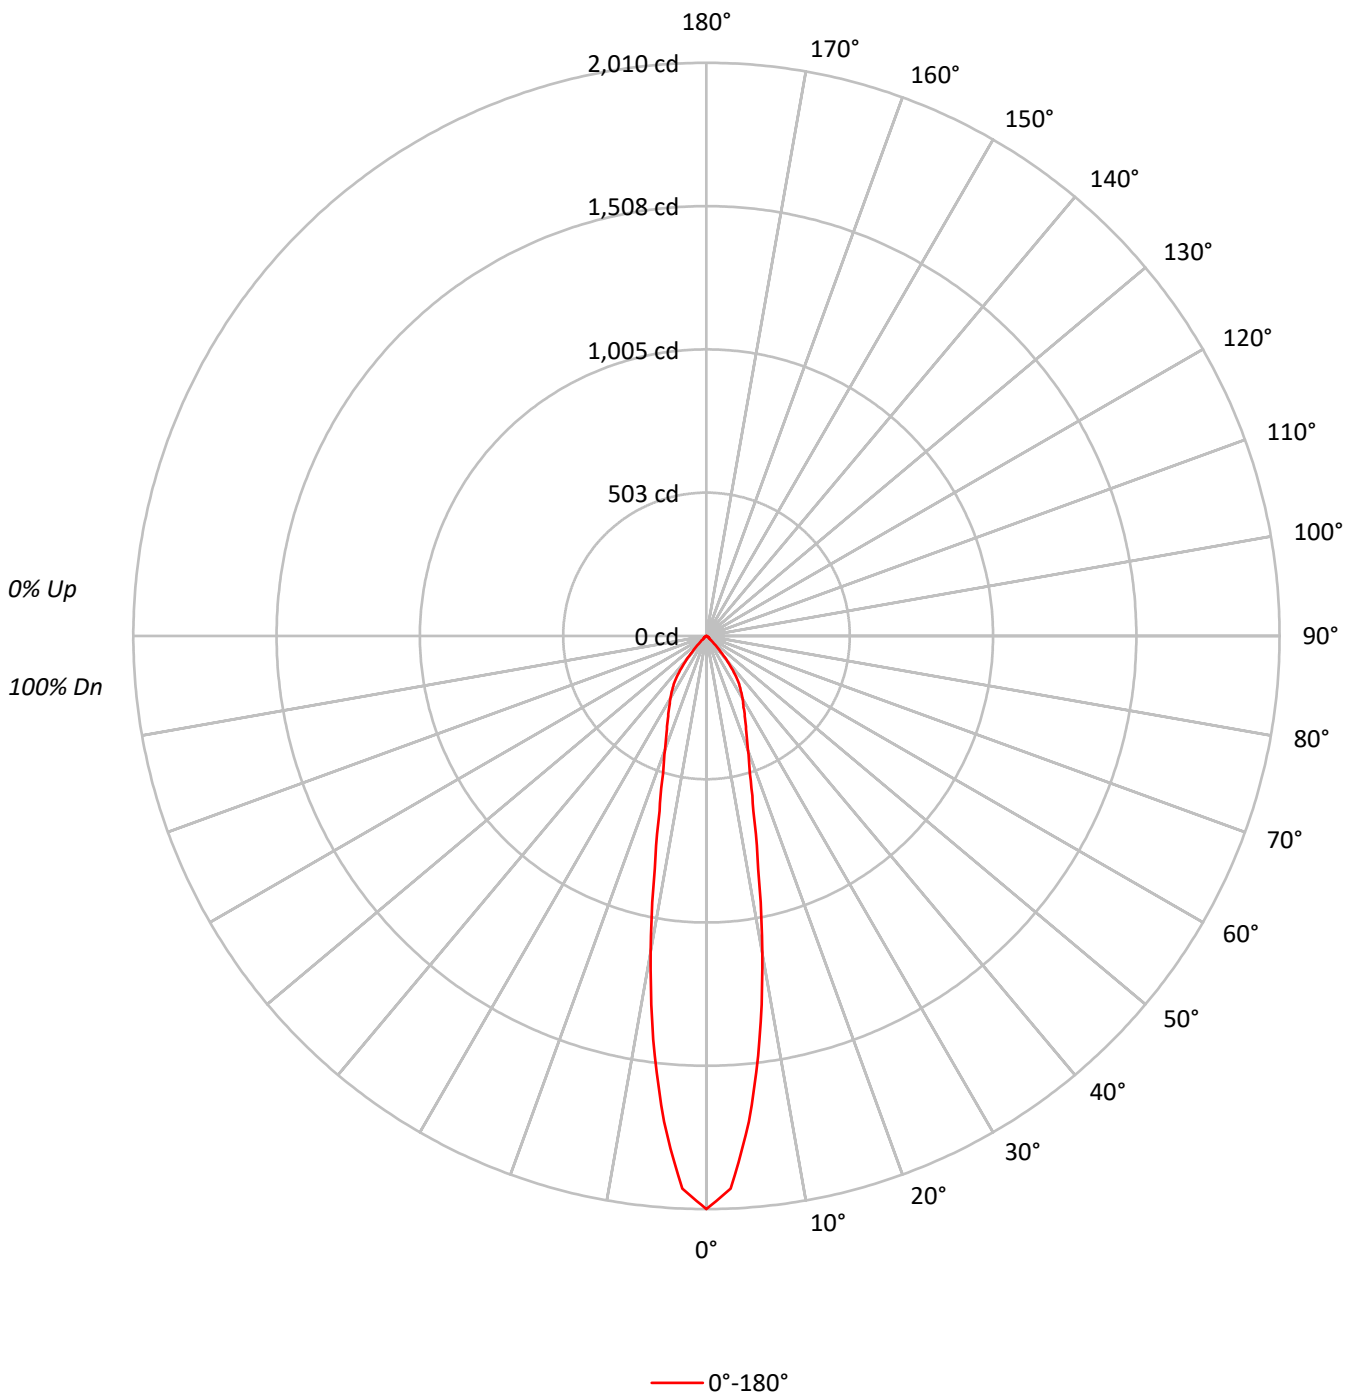



TEST NUMBER: P85100

CATALOG NUMBER: ELG405830SN(25 deg Beam-0deg tilt)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	120	120	120	120	117	117	117	117	112	112	112		107	107	107		103	103	103	101
1	115	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	105	101	98	107	103	100	97	100	97	95		97	95	93		94	93	91	89
3	105	99	94	91	103	97	93	90	95	91	88		92	90	87		90	88	86	84
4	100	93	88	84	98	92	87	84	90	86	83		88	85	82		86	83	81	80
5	96	88	83	79	94	87	82	79	85	81	78		84	80	77		82	79	77	75
6	92	84	78	74	90	83	78	74	81	77	74		80	76	73		79	75	73	71
7	88	79	74	70	87	79	74	70	78	73	70		76	72	69		75	72	69	68
8	84	76	70	67	83	75	70	67	74	70	66		73	69	66		72	69	66	64
9	81	72	67	63	80	72	67	63	71	66	63		70	66	63		69	66	63	62
10	78	69	64	61	77	69	64	61	68	64	60		67	63	60		67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	247925
5°	204880
10°	132248
15°	73559
20°	48977
25°	36967
30°	29407
35°	22929
40°	13291
45°	3913
50°	1714
55°	1113
60°	445
65°	321
70°	176
75°	196
80°	224
85°	264



TEST NUMBER: P85100

CATALOG NUMBER: ELG405830SN(25 deg Beam-0deg tilt)

ZONAL LUMENS:

Zone	Lumens	% Fixture	% Lamp
0°-10°	144.6	22.7	22.8
10°-20°	185.2	29.1	29.2
20°-30°	148.7	23.3	23.4
30°-40°	115.8	18.2	18.3
40°-50°	32.8	5.2	5.2
50°-60°	6.6	1.0	1.0
60°-70°	2.0	0.3	0.3
70°-80°	1.1	0.2	0.2
80°-90°	0.7	0.1	0.1
90°-100°	0.0	0.0	0.0
100°-110°	0.0	0.0	0.0
110°-120°	0.0	0.0	0.0
120°-130°	0.0	0.0	0.0
130°-140°	0.0	0.0	0.0
140°-150°	0.0	0.0	0.0
150°-160°	0.0	0.0	0.0
160°-170°	0.0	0.0	0.0
170°-180°	0.0	0.0	0.0
0°-30°	478.4	75.1	75.5
0°-40°	594.2	93.2	93.7
0°-60°	633.7	99.4	100.0
0°-90°	637.4	100.0	100.5
90°-120°	0.0	0.0	0.0
90°-150°	0.0	0.0	0.0
90°-180°	0.0	0.0	0.0
0°-180°	637.4	100.0	100.5

CANDELA DISTRIBUTION:

	0°	Flux
0°	2010	
5°	1710	145
15°	635	185
25°	320	149
35°	193	116
45°	31	33
55°	8	7
65°	2	2
75°	1	1
85°	1	1
90°	0	



TEST NUMBER: P85100

CATALOG NUMBER: ELG405830SN(25 deg Beam-0deg tilt)

CANDELA DISTRIBUTION (FULL):

	0°
0°	2010
2.5°	1940
5°	1710
7.5°	1427
10°	1127
12.5°	837
15°	635
17.5°	505
20°	425
22.5°	364
25°	320
27.5°	282
30°	252
32.5°	223
35°	193
37.5°	152
40°	109
42.5°	67
45°	31
47.5°	16
50°	13
52.5°	10
55°	8
57.5°	4
60°	3
62.5°	2
65°	2
67.5°	2
70°	1
72.5°	1
75°	1
77.5°	1
80°	1
82.5°	1
85°	1
87.5°	0
90°	0

(END OF REPORT)