

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P123718

Luminaire Tested: **EL406930-TL402WHS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P123718
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13988)
Test Lab: INNOVATION CENTER-P1
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: EL406930-TL402WHS
Description: HALO 4-INCH RECESSED LED DOWNLIGHT
WHITE REFLECTOR, SOLITE® LENS AND WHITE TRIM RING
Light Source: (1)SURFACE MOUNT LED, 3000K CCT, 90CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 780.1 lumens
Efficiency: N/A
Efficacy: 60.0 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.82
Luminous Opening: Circular (Dia: 0.29' x H: 0')
CIE Type: Direct


Input Watts (W): 13
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P123718

CATALOG NUMBER: EL406930-TL402WHS

Luminous Intensity Polar Plot

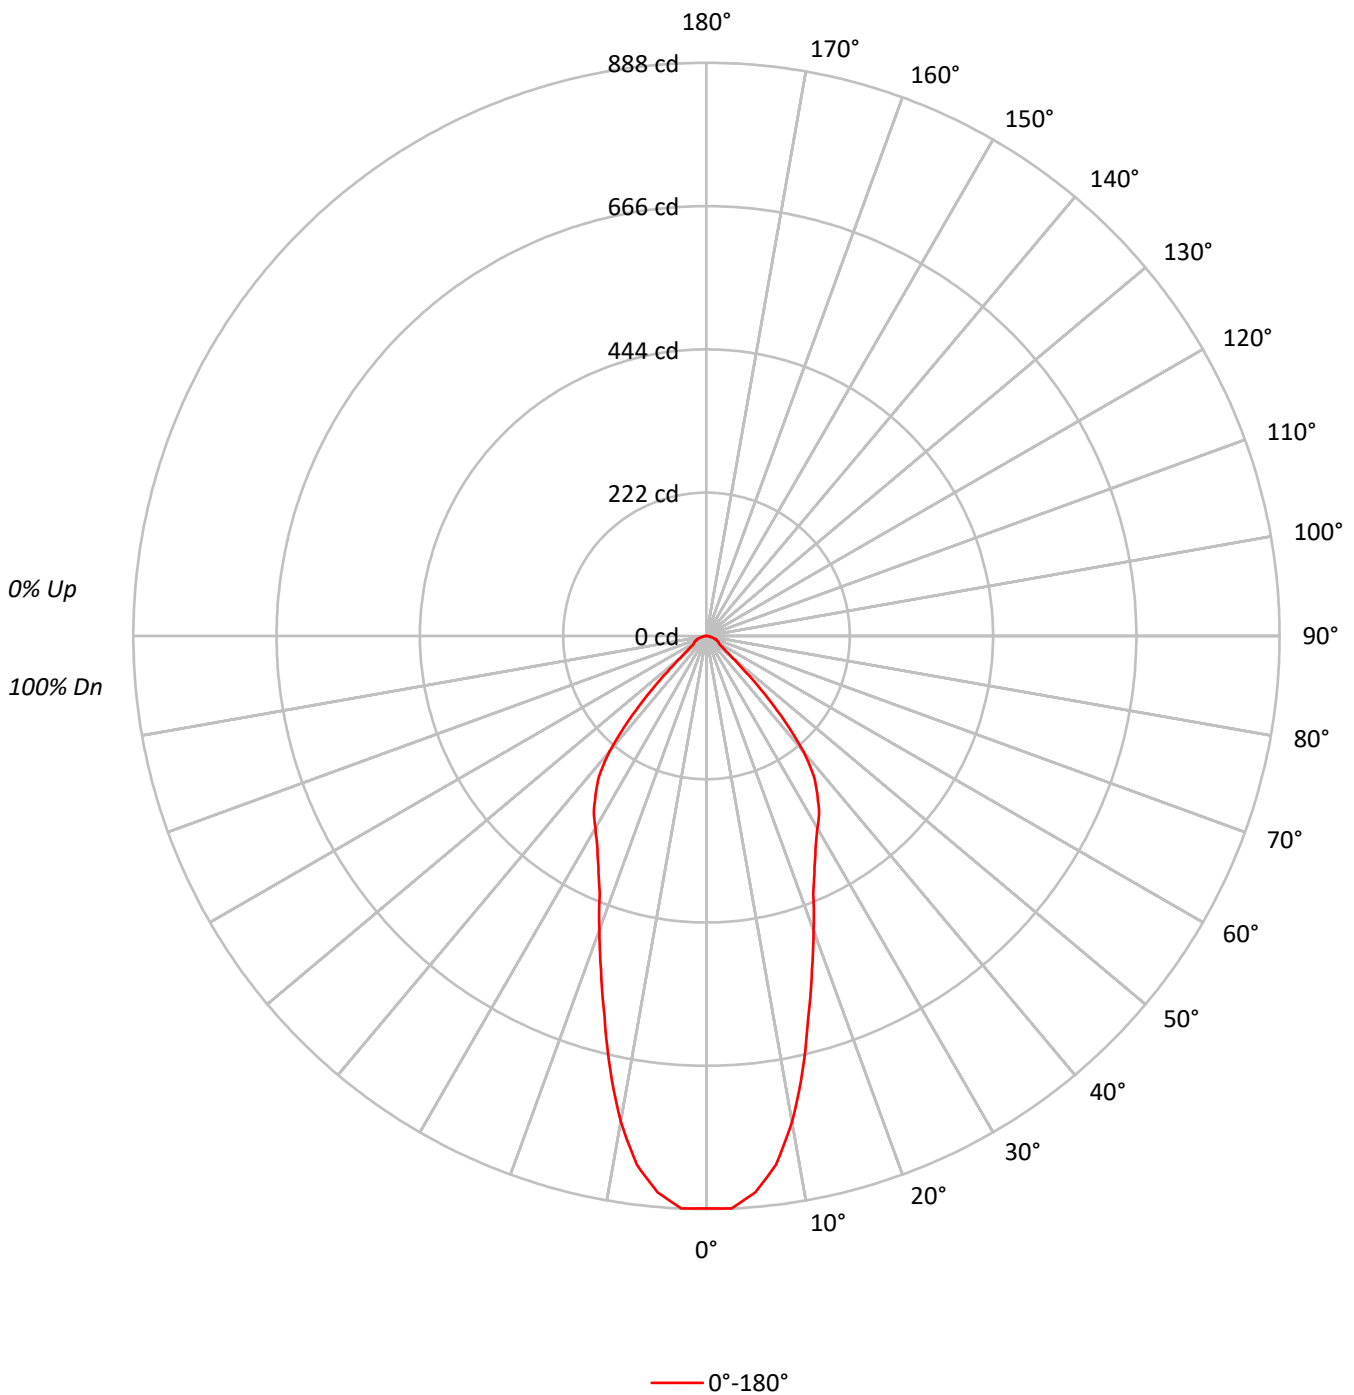



TEST NUMBER: P123718

CATALOG NUMBER: EL406930-TL402WHS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96	95	93	91
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89	87	85	83
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83	80	78	76
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78	74	71	69
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73	69	65	64
6	83	73	67	62	82	73	66	62	71	65	61		70	65	61		68	64	60	59
7	79	68	62	57	77	68	61	57	66	61	57		65	60	56		64	59	56	54
8	75	64	57	53	73	63	57	53	62	57	53		61	56	52		60	56	52	51
9	71	60	54	49	69	60	53	49	59	53	49		58	52	49		57	52	49	47
10	67	57	50	46	66	56	50	46	55	50	46		54	49	46		54	49	45	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	142867
5°	139968
10°	125047
15°	101740
20°	83236
25°	70392
30°	63975
35°	58844
40°	49254
45°	29117
50°	13083
55°	8370
60°	7217
65°	7319
70°	7537
75°	5291
80°	3989
85°	3882



TEST NUMBER: P123718

CATALOG NUMBER: EL406930-TL402WHS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.4	10.2
10°-20°	170.7	21.9
20°-30°	184.3	23.6
30°-40°	185.0	23.7
40°-50°	101.4	13.0
50°-60°	28.4	3.6
60°-70°	18.5	2.4
70°-80°	10.0	1.3
80°-90°	2.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	434.5	55.7
0°-40°	619.5	79.4
0°-60°	749.3	96.1
0°-90°	780.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	780.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	887	
5°	866	79
15°	610	171
25°	396	184
35°	299	185
45°	128	101
55°	30	28
65°	19	18
75°	8	10
85°	2	2
90°	0	



TEST NUMBER: P123718

CATALOG NUMBER: EL406930-TL402WHS

CANDELA DISTRIBUTION (FULL):

	0°
0°	886.8
2.5°	887.9
5°	865.5
7.5°	826.1
10°	764.4
12.5°	688.8
15°	610.0
17.5°	543.0
20°	485.5
22.5°	432.2
25°	396.0
27.5°	366.2
30°	343.9
32.5°	324.7
35°	299.2
37.5°	273.6
40°	234.2
42.5°	181.0
45°	127.8
47.5°	82.0
50°	52.2
52.5°	37.3
55°	29.8
57.5°	23.4
60°	22.4
62.5°	21.3
65°	19.2
67.5°	14.9
70°	16.0
72.5°	12.8
75°	8.5
77.5°	6.4
80°	4.3
82.5°	3.2
85°	2.1
87.5°	1.1
90°	0.0

(END OF REPORT)