

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P123679

Luminaire Tested: **EL406935-TL410TBZ**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P123679
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13978)
Test Lab: INNOVATION CENTER-P1
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: EL406935-TL410TBZ
Description: HALO 4-INCH RECESSED LED DOWNLIGHT
TUSCAN BRONZE REFLECTOR, DIFFUSE DROP LENS AND TUSCAN BRONZE TRIM RING
Light Source: (1)SURFACE MOUNT LED, 3500K CCT, 90CRI
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 510.0 lumens
Efficiency: N/A
Efficacy: 39.2 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.17
Luminous Opening: Circular (Dia: 0.29' x H: 0')
CIE Type: Direct


Input Watts (W): 13
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P123679

CATALOG NUMBER: EL406935-TL410TBZ

Luminous Intensity Polar Plot

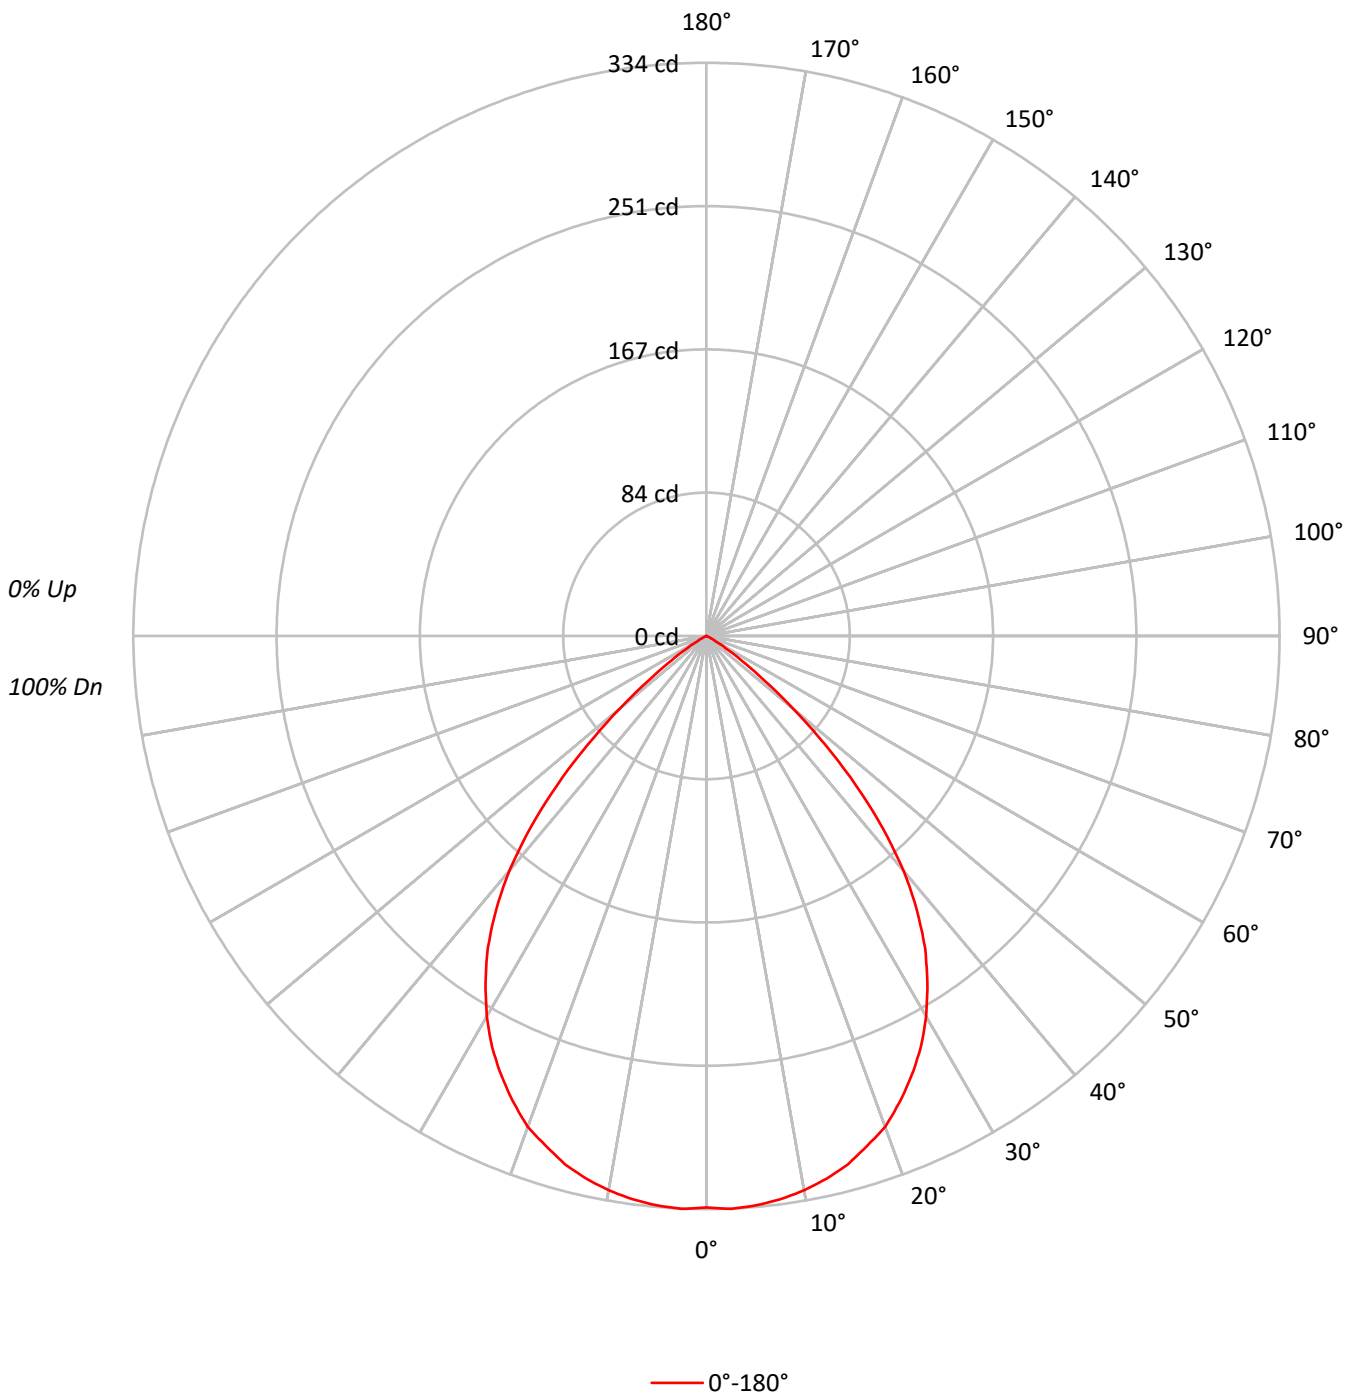



TEST NUMBER: P123679

CATALOG NUMBER: EL406935-TL410TBZ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	94	92
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83	80	77	75
4	93	84	78	73	91	83	77	72	81	75	71		79	74	71		77	73	70	68
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59		67	62	58		66	61	58	56
7	77	66	59	54	75	65	58	54	64	58	53		62	57	53		61	56	53	51
8	72	61	54	49	71	60	54	49	59	53	49		58	53	49		57	52	48	47
9	68	57	50	45	67	56	50	45	55	49	45		54	49	45		53	48	45	43
10	64	53	46	42	63	52	46	42	51	45	41		51	45	41		50	45	41	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53664
5°	53869
10°	53657
15°	53155
20°	52187
25°	50270
30°	47623
35°	43681
40°	37624
45°	28115
50°	16492
55°	6938
60°	1998
65°	381
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P123679

CATALOG NUMBER: EL406935-TL410TBZ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.6	6.2
10°-20°	89.7	17.6
20°-30°	129.8	25.5
30°-40°	137.4	26.9
40°-50°	94.0	18.4
50°-60°	25.6	5.0
60°-70°	2.0	0.4
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	251.1	49.2
0°-40°	388.5	76.2
0°-60°	508.0	99.6
0°-90°	510.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	510.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	333	
5°	333	32
15°	319	90
25°	283	130
35°	222	137
45°	123	94
55°	25	26
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P123679

CATALOG NUMBER: EL406935-TL410TBZ

CANDELA DISTRIBUTION (FULL):

0°	
0°	333.1
2.5°	334.2
5°	333.1
7.5°	331.1
10°	328.0
12.5°	323.9
15°	318.7
17.5°	311.5
20°	304.4
22.5°	294.1
25°	282.8
27.5°	270.4
30°	256.0
32.5°	239.6
35°	222.1
37.5°	201.5
40°	178.9
42.5°	152.2
45°	123.4
47.5°	93.6
50°	65.8
52.5°	42.2
55°	24.7
57.5°	13.4
60°	6.2
62.5°	3.1
65°	1.0
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)