

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P303594

Luminaire Tested: **HLA4S06FL9FS1EMWR-5000K**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P303594  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA ( A1906595A001)  
Test Lab:  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO  
Catalog Number: HLA4S06FL9FS1EMWR-5000K  
Description: 4IN HLA LED DOWNLIGHT WITH 40 DEGREE OPTIC AND 5000K LEDS  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 758.8 lumens  
Efficiency: N/A  
Efficacy: 74.4 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P303594  
CATALOG NUMBER: HLA4S06FL9FS1EMWR-5000K

### Luminous Intensity Polar Plot

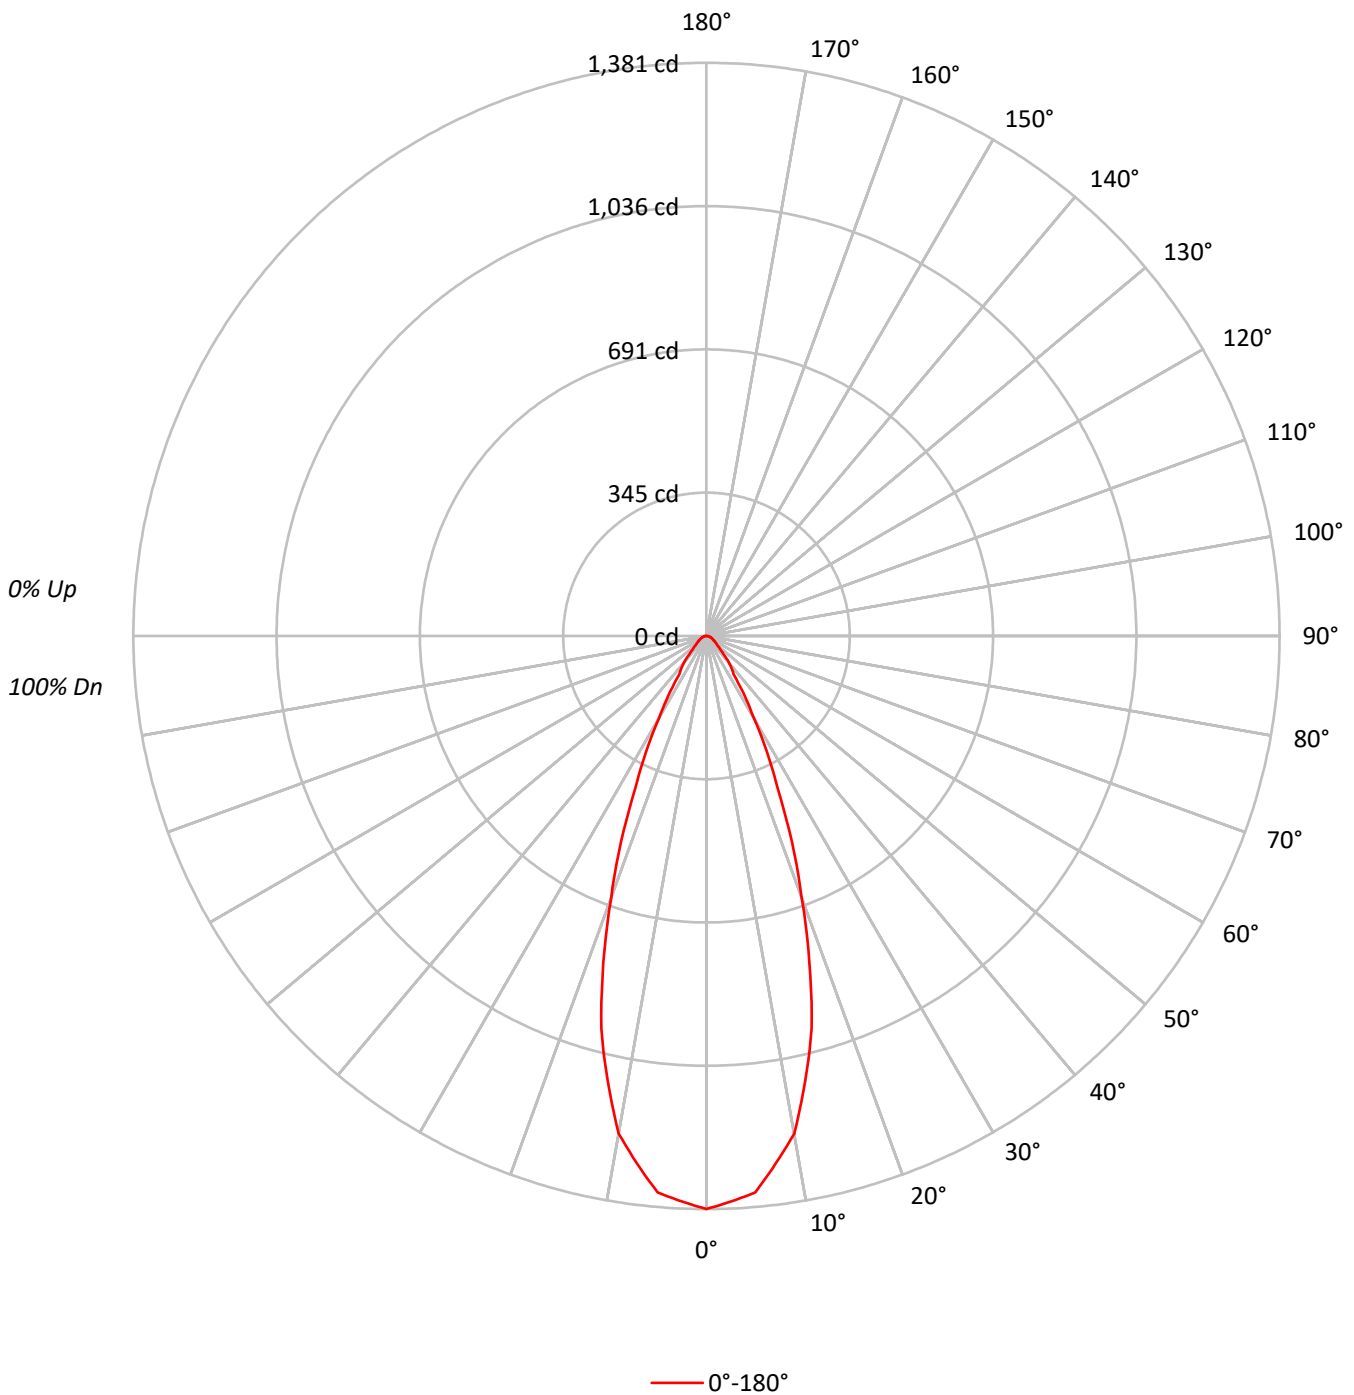



TEST NUMBER: P303594

CATALOG NUMBER: HLA4S06FL9FS1EMWR-5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101		101	99	98		97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92	90	88	87
3	103	96	91	87	101	95	90	87	92	88	85		90	87	84		88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	80		85	82	79		83	80	78	76
5	93	85	80	76	92	84	79	75	83	78	75		81	77	74		79	76	73	72
6	89	81	75	71	88	80	75	71	78	74	70		77	73	70		76	72	69	68
7	85	77	71	67	84	76	71	67	75	70	66		73	69	66		72	69	66	64
8	82	73	67	63	81	72	67	63	71	66	63		70	66	63		69	65	62	61
9	78	69	64	60	77	69	64	60	68	63	60		67	63	60		66	62	59	58
10	75	66	61	57	74	66	61	57	65	60	57		64	60	57		64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	302783
5°	296367
10°	271026
15°	222408
20°	156744
25°	98062
30°	57427
35°	30972
40°	24331
45°	14978
50°	11496
55°	9481
60°	8377
65°	7679
70°	7309
75°	7117
80°	7324
85°	7548



TEST NUMBER: P303594

CATALOG NUMBER: HLA4S06FL9FS1EMWR-5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	124.3	16.4
10°-20°	266.4	35.1
20°-30°	193.0	25.4
30°-40°	83.9	11.1
40°-50°	41.3	5.4
50°-60°	22.9	3.0
60°-70°	14.9	2.0
70°-80°	9.0	1.2
80°-90°	3.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	583.7	76.9
0°-40°	667.6	88.0
0°-60°	731.7	96.4
0°-90°	758.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	758.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1381	
5°	1346	124
15°	980	266
25°	405	193
35°	116	84
45°	48	41
55°	25	23
65°	15	15
75°	8	9
85°	3	3
90°	0	



TEST NUMBER: P303594

CATALOG NUMBER: HLA4S06FL9FS1EMWR-5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1380.8
5°	1346.4
10°	1217.2
15°	979.7
20°	671.7
25°	405.3
30°	226.8
35°	115.7
40°	85.0
45°	48.3
50°	33.7
55°	24.8
60°	19.1
65°	14.8
70°	11.4
75°	8.4
80°	5.8
85°	3.0
90°	0.0

(END OF REPORT)