

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886863

Luminaire Tested: ML412LSFL95FS1E-TIR4D25NFL-TL4RDMB-816LM-4000K

Issue Date: 7/18/2024

Test Information

Test Method: LM-79-2019
Report Number: P886863
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-38)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/18/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML412LSFL95FS1E-TIR4D25NFL-TL4RDMB-816LM-4000K
Description: 4IN ROUND ML FLEX, SELECTABLE CCT, WITH 25D TIR, MATTE BLACK TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 879.0 lumens
Efficiency: N/A
Efficacy: 63.2 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.51
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 13.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886863
CATALOG NUMBER: ML412LSFL95FS1E-TIR4D25NFL-TL4RDMB-816LM-4000K

Luminous Intensity Polar Plot

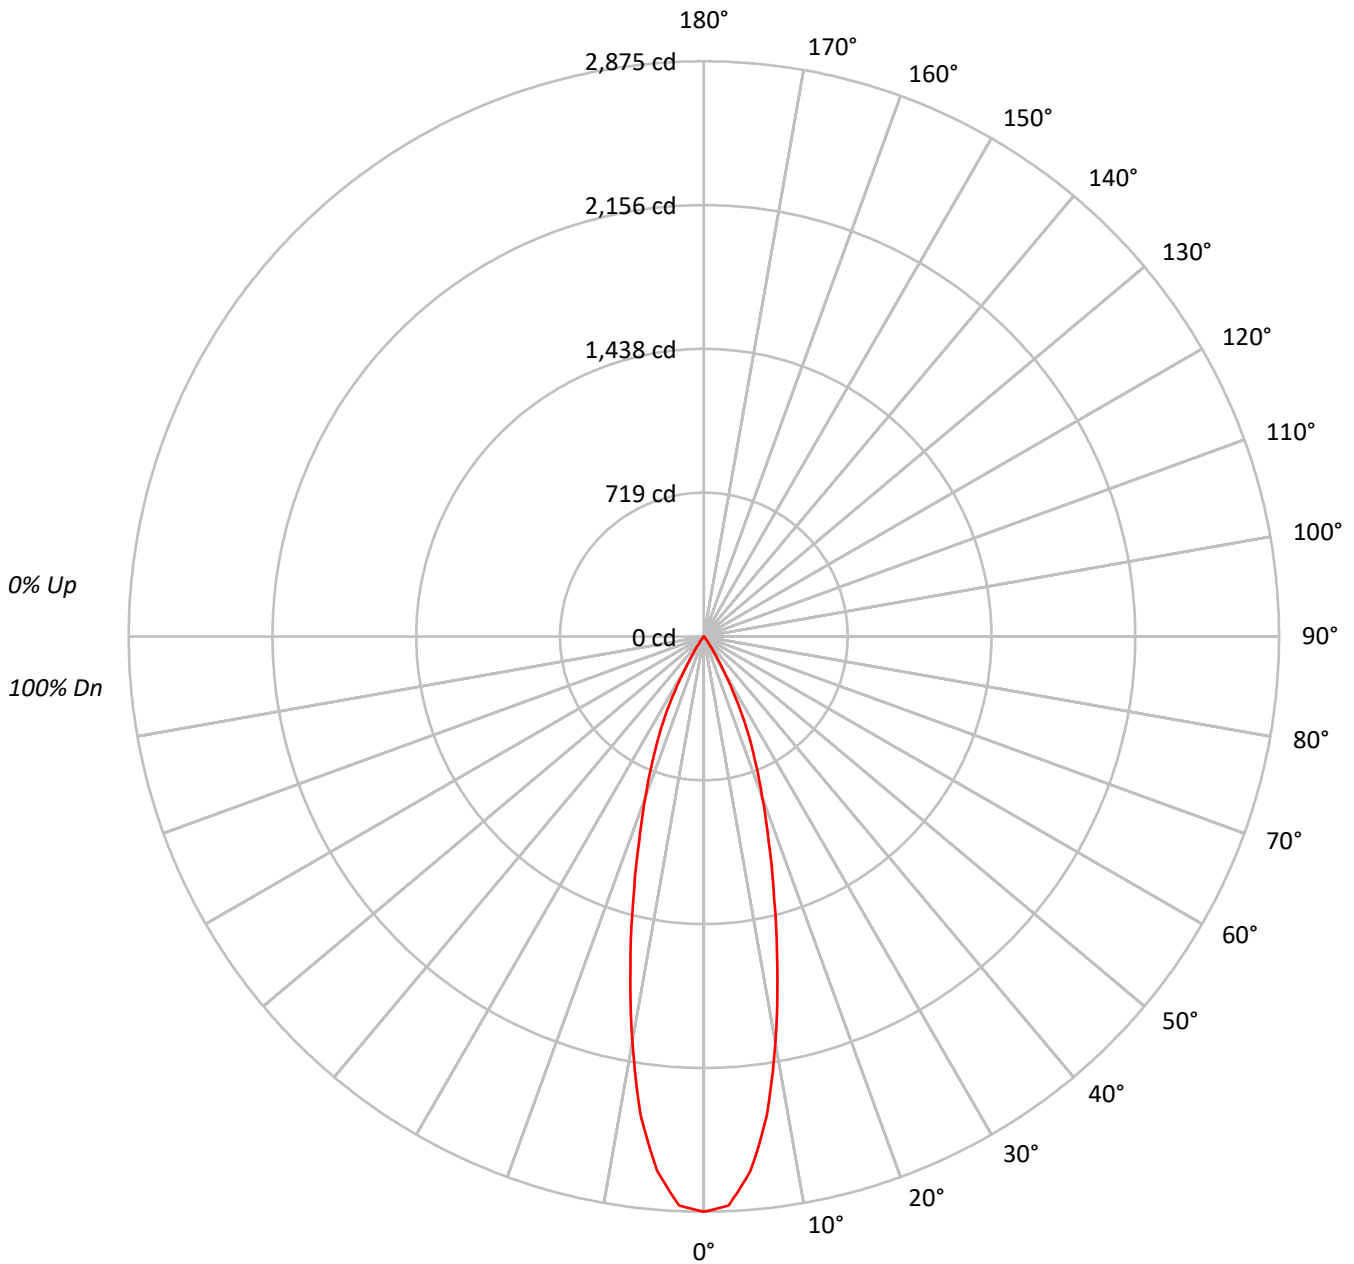



TEST NUMBER: P886863
 CATALOG NUMBER: ML412LSFL95FS1E-TIR4D25NFL-TL4RDMB-816LM-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																											
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																											
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																											
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	88	87	85																											
5	100	93	89	86	98	93	88	85	91	87	85	89	86	84	88	85	83	82																											
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79																											
7	93	86	82	79	92	86	82	78	85	81	78	84	80	78	83	80	77	76																											
8	90	83	79	76	89	83	78	76	82	78	75	81	77	75	80	77	75	74																											
9	88	80	76	73	87	80	76	73	79	75	73	78	75	72	78	74	72	71																											
10	85	78	73	70	84	77	73	70	77	73	70	76	72	70	75	72	70	69																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	354619
5°	331940
10°	257849
15°	173693
20°	111769
25°	68457
30°	27118
35°	6174
40°	1047
45°	244
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 244 cd/sqm



TEST NUMBER: P886863

CATALOG NUMBER: ML412LSFL95FS1E-TIR4D25NFL-TL4RDMB-816LM-400K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	236.0	26.8
10°-20°	378.5	43.1
20°-30°	225.8	25.7
30°-40°	37.1	4.2
40°-50°	1.7	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	840.2	95.6
0°-40°	877.3	99.8
0°-60°	879.0	100.0
0°-90°	879.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	879.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2875	
5°	2681	236
15°	1360	378
25°	503	226
35°	41	37
45°	1	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P886863
CATALOG NUMBER: ML412LSFL95FS1E-TIR4D25NFL-TL4RDMB-816LM-4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2875.0
2.5°	2846.9
5°	2680.9
7.5°	2415.1
10°	2058.7
12.5°	1695.8
15°	1360.2
17.5°	1077.8
20°	851.5
22.5°	664.7
25°	503.0
27.5°	339.2
30°	190.4
32.5°	96.3
35°	41.0
37.5°	14.4
40°	6.5
42.5°	3.6
45°	1.4
47.5°	0.7
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)