

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P886929

Luminaire Tested: ML412LSFL95FS1E-TIR4D55WFL-TL4RDMW-1020LM-5000K

Issue Date: 7/9/2024

Test Information

Test Method: LM-79-2019
Report Number: P886929
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-42)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/9/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML412LSFL95FS1E-TIR4D55WFL-TL4RDMW-1020LM-5000K
Description: 4IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE WHITE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 95CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1308.6 lumens
Efficiency: N/A
Efficacy: 74.4 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.78
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 17.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P886929
CATALOG NUMBER: ML412LSFL95FS1E-TIR4D55WFL-TL4RDMW-1020LM-5000K

Luminous Intensity Polar Plot

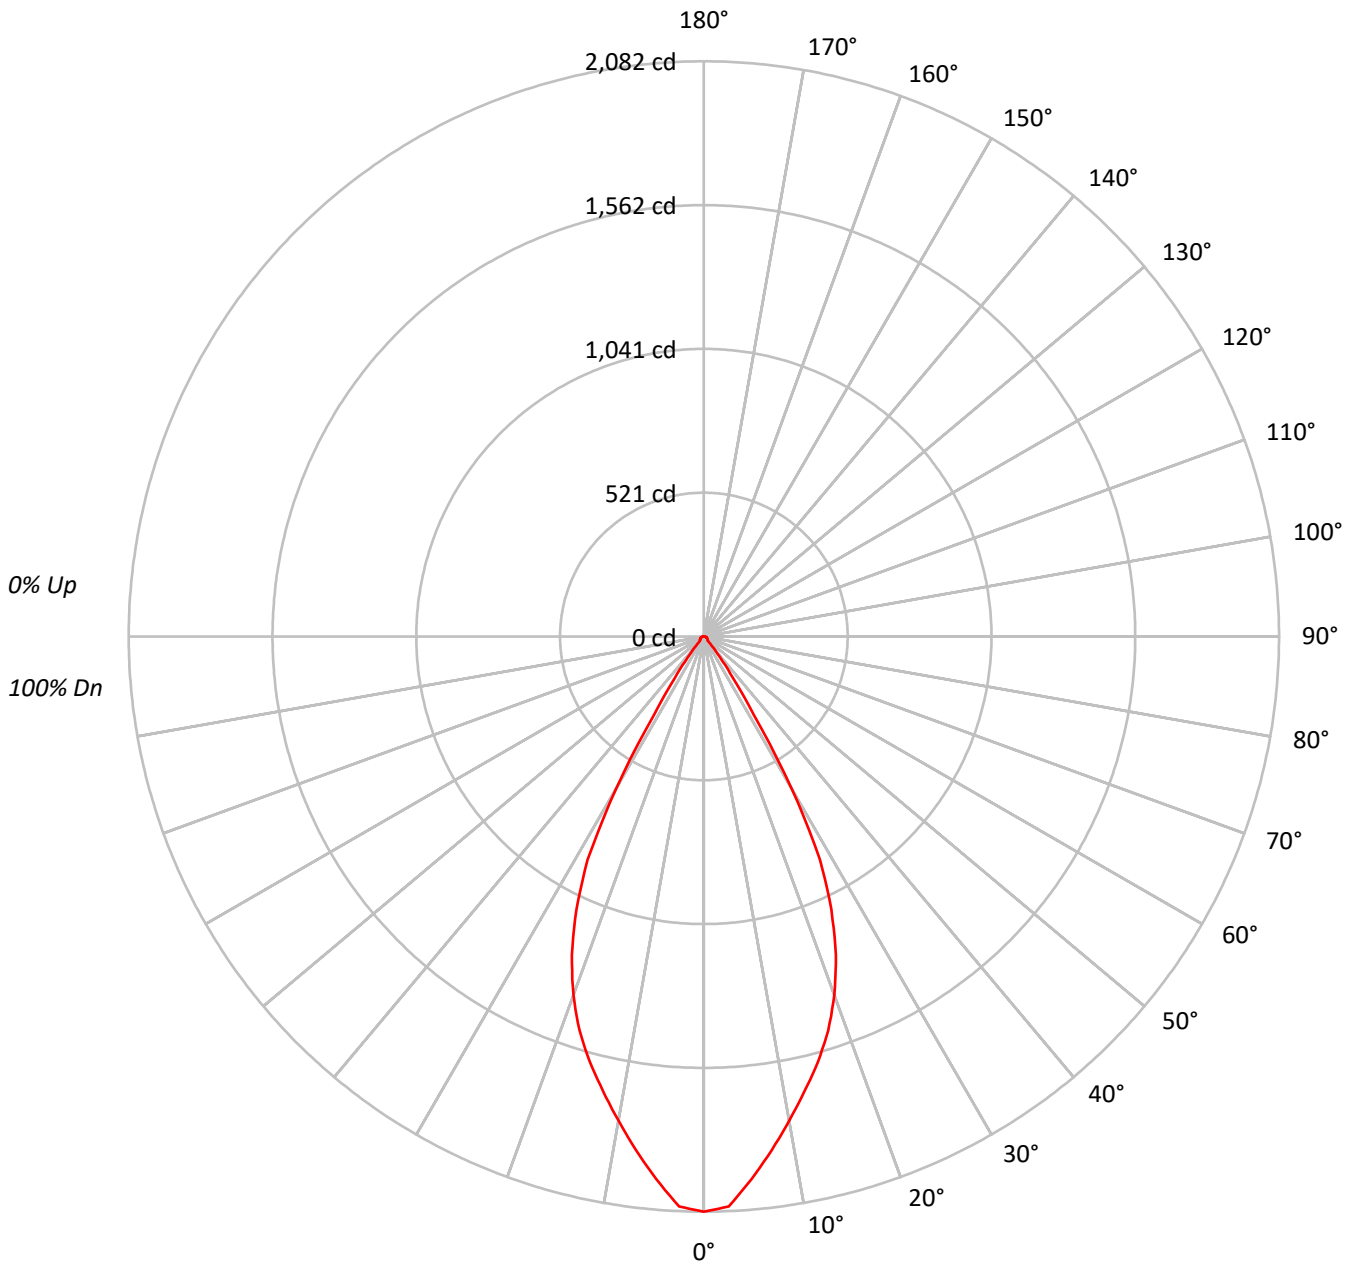



TEST NUMBER: P886929

CATALOG NUMBER: ML412LSFL95FS1E-TIR4D55WFL-TL4RDMW-1020LM-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	74	69	65	82	74	69	65	73	68	65	72	67	64	71	67	64	63			
9	80	71	65	62	79	70	65	62	69	65	61	69	64	61	68	64	61	60			
10	76	67	62	59	75	67	62	59	66	62	58	66	61	58	65	61	58	57			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	256830
5°	244154
10°	222880
15°	203613
20°	181285
25°	148509
30°	90370
35°	27586
40°	7197
45°	3332
50°	3492
55°	3527
60°	3602
65°	3736
70°	3606
75°	3908
80°	3907
85°	3821

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 3908 cd/sqm



TEST NUMBER: P886929

CATALOG NUMBER: ML412LSFL95FS1E-TIR4D55WFL-TL4RDMW-1020LM-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.2	13.9
10°-20°	444.8	34.0
20°-30°	483.1	36.9
30°-40°	143.1	10.9
40°-50°	17.3	1.3
50°-60°	14.7	1.1
60°-70°	12.3	0.9
70°-80°	8.3	0.6
80°-90°	2.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1110.1	84.8
0°-40°	1253.2	95.8
0°-60°	1285.3	98.2
0°-90°	1308.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1308.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2082	
5°	1972	182
15°	1594	445
25°	1091	483
35°	183	143
45°	19	17
55°	16	15
65°	13	12
75°	8	8
85°	3	3
90°	0	



TEST NUMBER: P886929

CATALOG NUMBER: ML412LSFL95FS1E-TIR4D55WFL-TL4RDMW-1020LM-5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2082.2
2.5°	2064.9
5°	1971.9
7.5°	1876.2
10°	1779.5
12.5°	1685.6
15°	1594.5
17.5°	1496.0
20°	1381.1
22.5°	1248.9
25°	1091.2
27.5°	910.7
30°	634.5
32.5°	335.5
35°	183.2
37.5°	95.7
40°	44.7
42.5°	21.9
45°	19.1
47.5°	18.2
50°	18.2
52.5°	17.3
55°	16.4
57.5°	15.5
60°	14.6
62.5°	13.7
65°	12.8
67.5°	10.9
70°	10.0
72.5°	9.1
75°	8.2
77.5°	6.4
80°	5.5
82.5°	3.6
85°	2.7
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)