

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P887057

Luminaire Tested: ML412LSFL9FS1E-TIR4D55WFL-TL4RDMW-1200LM-3500K

Issue Date: 7/9/2024

Test Information

Test Method: LM-79-2019
Report Number: P887057
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-42)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 7/9/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML412LSFL9FS1E-TIR4D55WFL-TL4RDMW-1200LM-3500K
Description: 4IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE WHITE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1530.0 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.78
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 17.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P887057
CATALOG NUMBER: ML412LSFL9FS1E-TIR4D55WFL-TL4RDMW-1200LM-3500K

Luminous Intensity Polar Plot

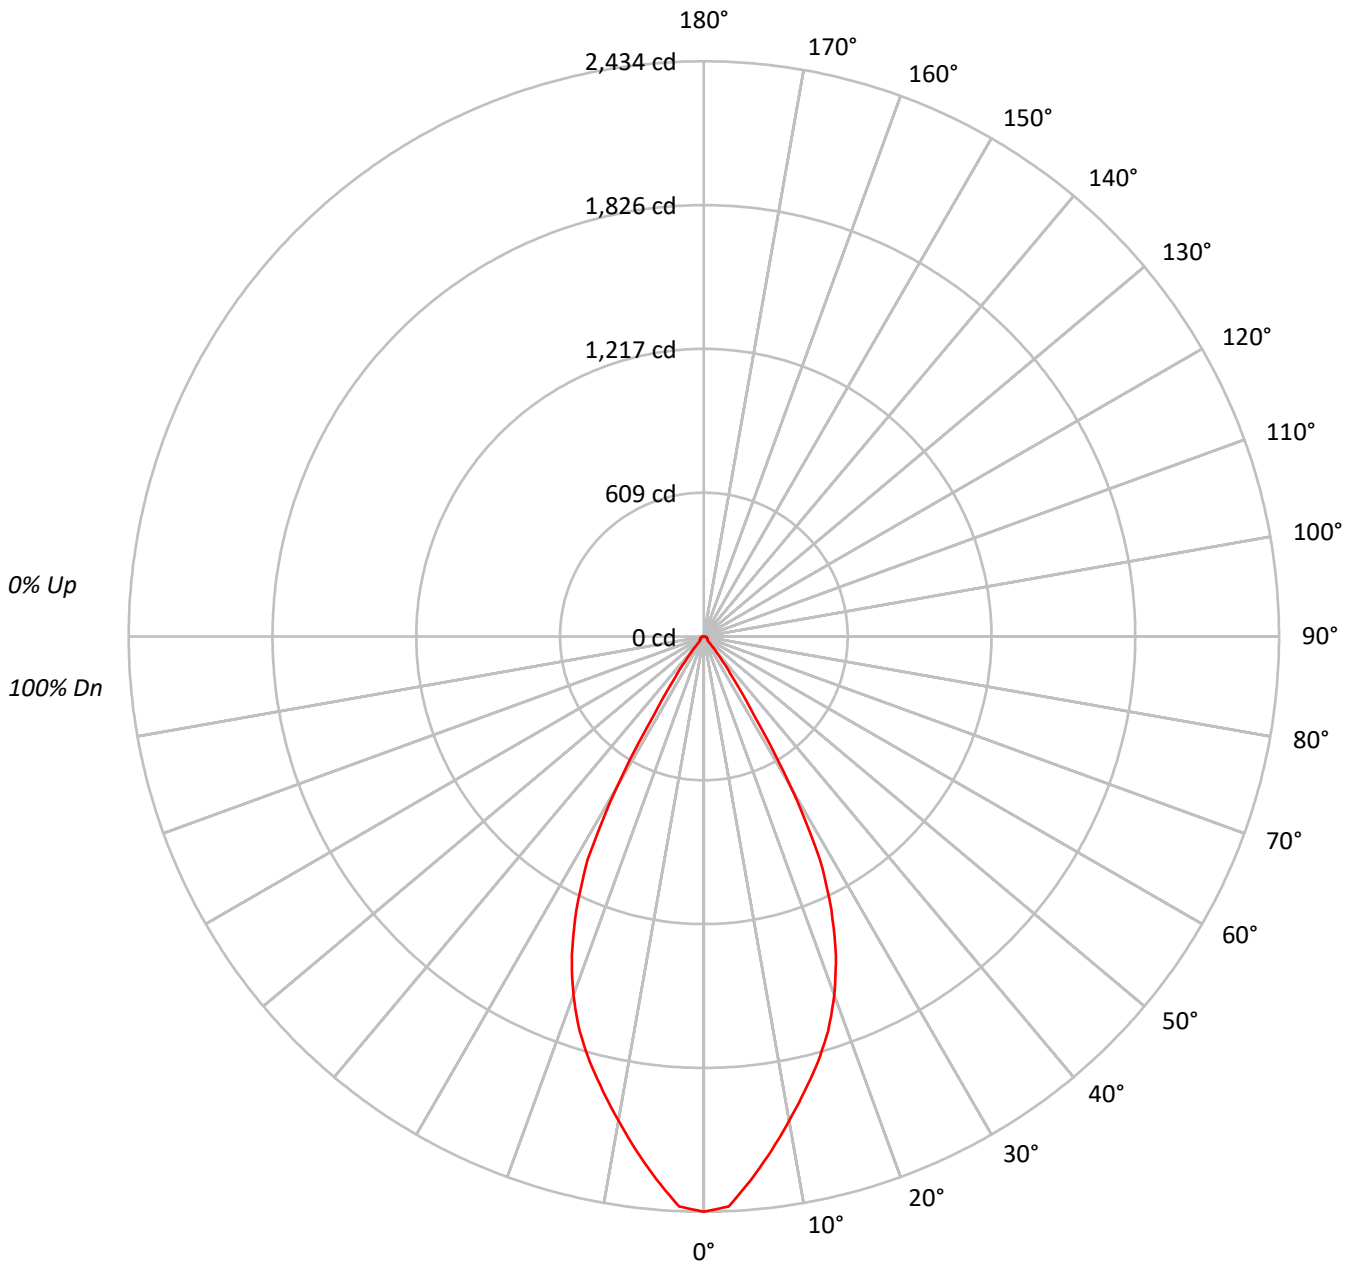



TEST NUMBER: P887057
 CATALOG NUMBER: ML412LSFL9FS1E-TIR4D55WFL-TL4RDMW-1200LM-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	74	69	65	82	74	69	65	73	68	65	72	67	64	71	67	64	63			
9	80	71	65	62	79	70	65	62	69	65	61	69	64	61	68	64	61	60			
10	76	67	62	59	75	67	62	59	66	62	58	66	61	58	65	61	58	57			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	300260
5°	285447
10°	260579
15°	238040
20°	211948
25°	173632
30°	105653
35°	32254
40°	8405
45°	3907
50°	4087
55°	4129
60°	4218
65°	4349
70°	4219
75°	4575
80°	4546
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 4575 cd/sqm



TEST NUMBER: P887057

CATALOG NUMBER: ML412LSFL9FS1E-TIR4D55WFL-TL4RDMW-1200LM-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	213.1	13.9
10°-20°	520.0	34.0
20°-30°	564.8	36.9
30°-40°	167.3	10.9
40°-50°	20.3	1.3
50°-60°	17.2	1.1
60°-70°	14.4	0.9
70°-80°	9.7	0.6
80°-90°	3.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1297.9	84.8
0°-40°	1465.2	95.8
0°-60°	1502.7	98.2
0°-90°	1530.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1530.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2434	
5°	2305	213
15°	1864	520
25°	1276	565
35°	214	167
45°	22	20
55°	19	17
65°	15	14
75°	10	10
85°	3	3
90°	0	



TEST NUMBER: P887057
CATALOG NUMBER: ML412LSFL9FS1E-TIR4D55WFL-TL4RDMW-1200LM-3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2434.3
2.5°	2414.1
5°	2305.4
7.5°	2193.5
10°	2080.5
12.5°	1970.7
15°	1864.1
17.5°	1749.0
20°	1614.7
22.5°	1460.2
25°	1275.8
27.5°	1064.8
30°	741.8
32.5°	392.2
35°	214.2
37.5°	111.9
40°	52.2
42.5°	25.6
45°	22.4
47.5°	21.3
50°	21.3
52.5°	20.3
55°	19.2
57.5°	18.1
60°	17.1
62.5°	16.0
65°	14.9
67.5°	12.8
70°	11.7
72.5°	10.7
75°	9.6
77.5°	7.5
80°	6.4
82.5°	4.3
85°	3.2
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)