

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P887116

Luminaire Tested: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMB-600LM-2700K

Issue Date: 7/9/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P887116  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 7/9/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMB-600LM-2700K  
Description: 4IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE BLACK TRIM  
Light Source: (1) D2W LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 691.0 lumens  
Efficiency: N/A  
Efficacy: 73.5 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.79  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 9.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P887116  
CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMB-600LM-2700K

### Luminous Intensity Polar Plot

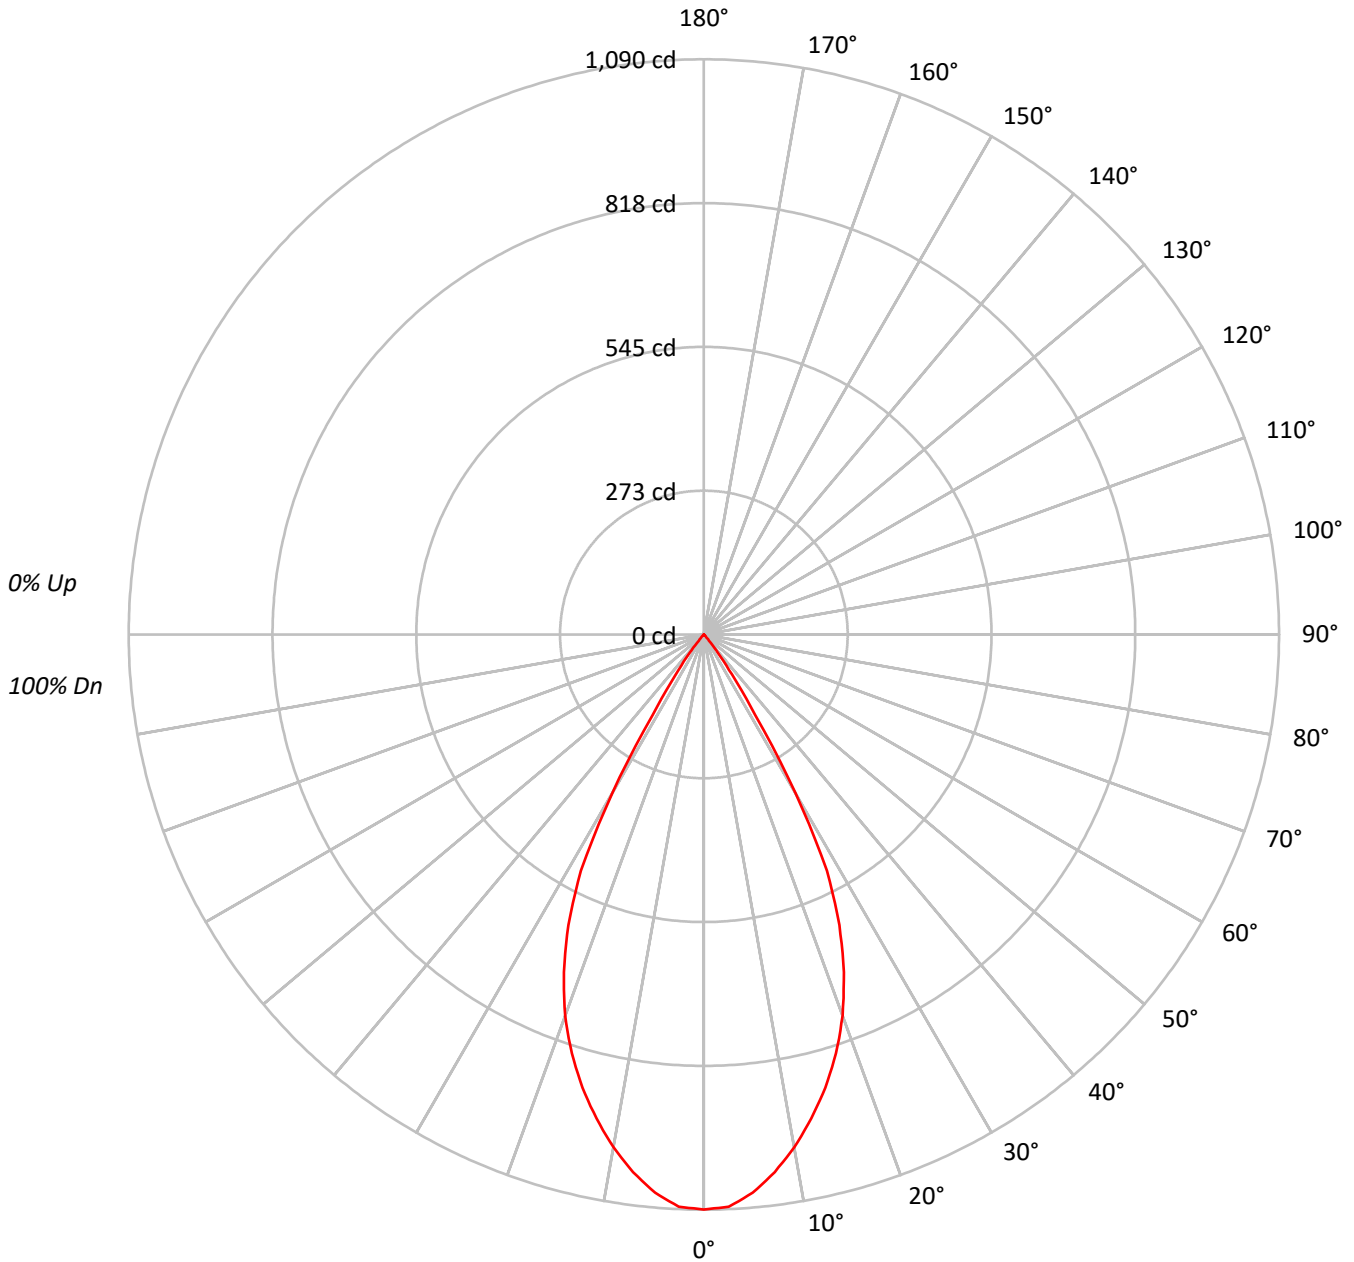



TEST NUMBER: P887116

CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMB-600LM-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95			
2	109	105	102	99	107	103	100	97	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85			
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76			
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72			
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65			
9	81	73	67	64	80	72	67	64	71	67	64	71	66	63	70	66	63	62			
10	78	69	64	61	77	69	64	61	68	64	61	68	63	60	67	63	60	59			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	134422
5°	131493
10°	123608
15°	113535
20°	100888
25°	82679
30°	49493
35°	13883
40°	2399
45°	87
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 47.5°  
 Luminance: 91 cd/sqm



TEST NUMBER: P887116

CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMB-600LM-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.9	14.3
10°-20°	247.7	35.8
20°-30°	268.0	38.8
30°-40°	74.5	10.8
40°-50°	1.9	0.3
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	614.6	88.9
0°-40°	689.1	99.7
0°-60°	691.0	100.0
0°-90°	691.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	691.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1090	
5°	1062	99
15°	889	248
25°	608	268
35°	92	74
45°	0	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P887116

CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMB-600LM-2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1089.8
2.5°	1085.2
5°	1062.0
7.5°	1027.6
10°	986.9
12.5°	939.5
15°	889.1
17.5°	832.4
20°	768.6
22.5°	692.9
25°	607.5
27.5°	505.0
30°	347.5
32.5°	181.2
35°	92.2
37.5°	43.8
40°	14.9
42.5°	2.1
45°	0.5
47.5°	0.5
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)