

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P887118

Luminaire Tested: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMW-600LM-2700K

Issue Date: 7/9/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P887118  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2402-314-42)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 7/9/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMW-600LM-2700K  
Description: 4IN ROUND ML FLEX, SELECTABLE CCT, WITH 55D TIR, MATTE WHITE TRIM  
Light Source: (1) D2W LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 738.4 lumens  
Efficiency: N/A  
Efficacy: 78.6 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.78  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 9.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P887118  
CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMW-600LM-2700K

### Luminous Intensity Polar Plot

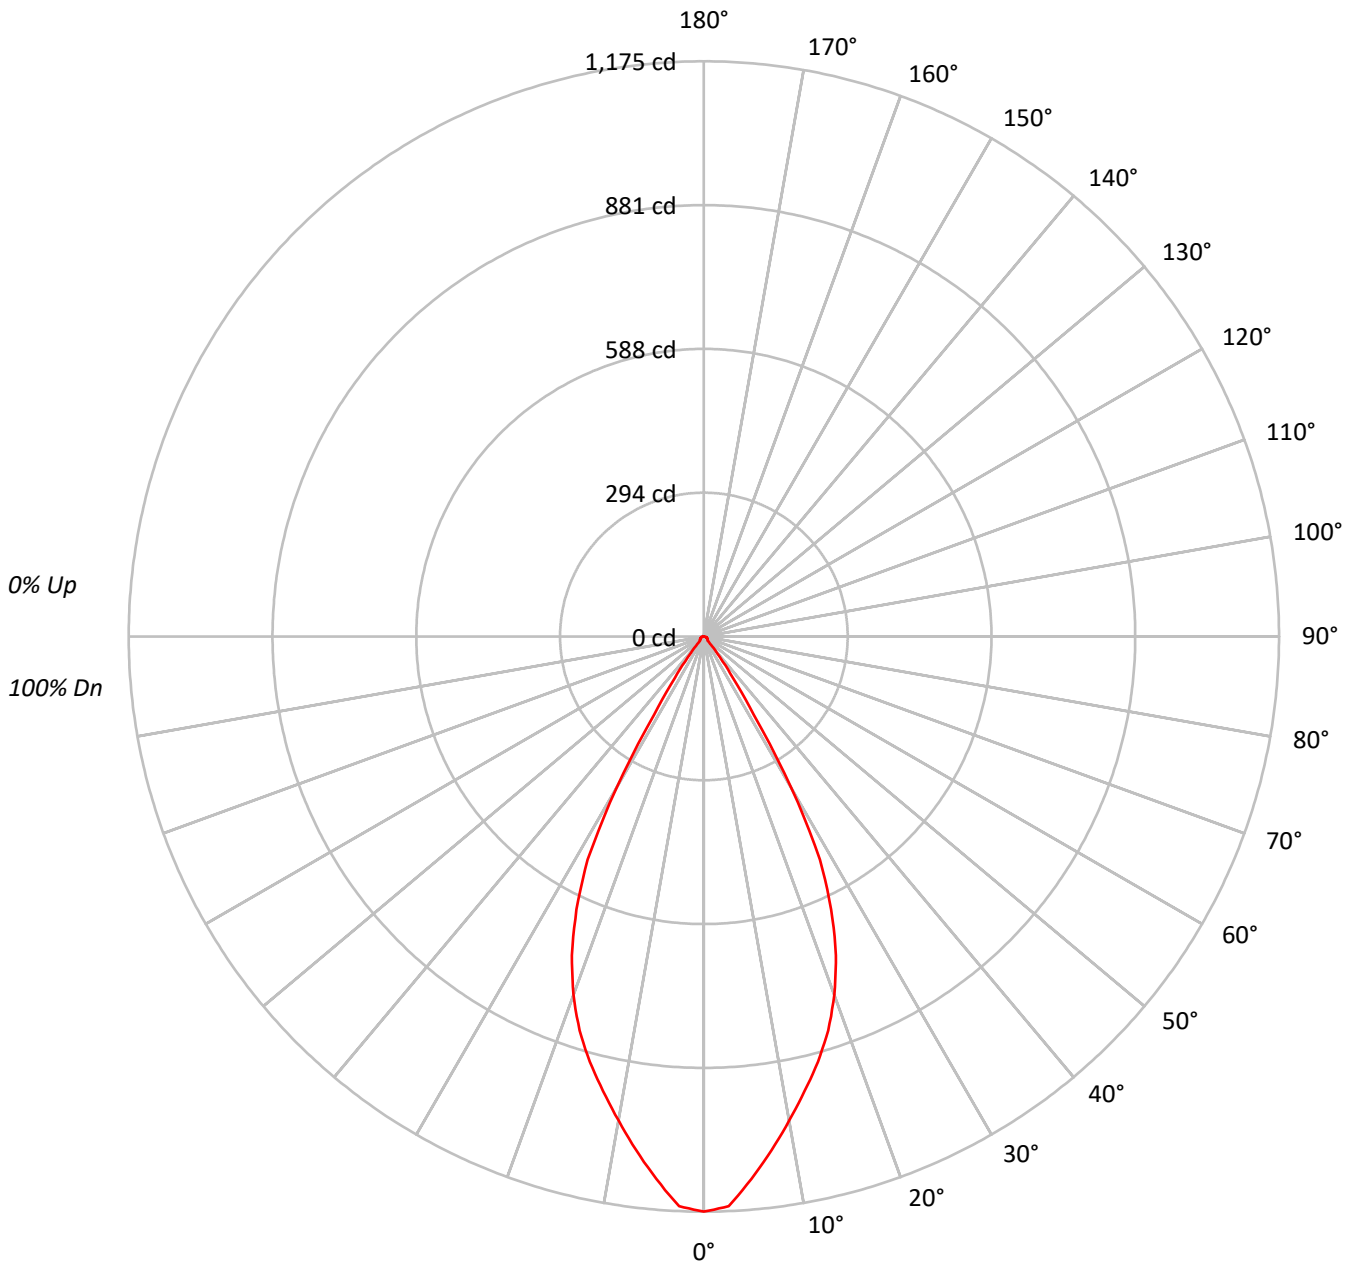



TEST NUMBER: P887118

CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMW-600LM-2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	74	69	65	82	74	69	65	73	68	65	72	67	64	71	67	64	63			
9	80	71	65	62	79	70	65	62	69	65	61	69	64	61	68	64	61	60			
10	76	67	62	59	75	67	62	59	66	62	58	66	61	58	65	61	58	57			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	144906
5°	137759
10°	125762
15°	114876
20°	102292
25°	83795
30°	50989
35°	15570
40°	4058
45°	1884
50°	1976
55°	2000
60°	2023
65°	2101
70°	2056
75°	2192
80°	2202
85°	2123

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 80°  
 Luminance: 2202 cd/sqm



TEST NUMBER: P887118

CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMW-600LM-2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	102.8	13.9
10°-20°	251.0	34.0
20°-30°	272.6	36.9
30°-40°	80.8	10.9
40°-50°	9.8	1.3
50°-60°	8.3	1.1
60°-70°	6.9	0.9
70°-80°	4.7	0.6
80°-90°	1.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	626.4	84.8
0°-40°	707.1	95.8
0°-60°	725.2	98.2
0°-90°	738.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	738.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1175	
5°	1113	103
15°	900	251
25°	616	273
35°	103	81
45°	11	10
55°	9	8
65°	7	7
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P887118

CATALOG NUMBER: ML412LSFLD2W1E-TIR4D55WFL-TL4RDMW-600LM-2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1174.8
2.5°	1165.0
5°	1112.6
7.5°	1058.6
10°	1004.1
12.5°	951.1
15°	899.6
17.5°	844.1
20°	779.3
22.5°	704.7
25°	615.7
27.5°	513.9
30°	358.0
32.5°	189.3
35°	103.4
37.5°	54.0
40°	25.2
42.5°	12.3
45°	10.8
47.5°	10.3
50°	10.3
52.5°	9.8
55°	9.3
57.5°	8.7
60°	8.2
62.5°	7.7
65°	7.2
67.5°	6.2
70°	5.7
72.5°	5.1
75°	4.6
77.5°	3.6
80°	3.1
82.5°	2.1
85°	1.5
87.5°	0.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)