

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640313

Luminaire Tested: ML5609LSFL40D2W1E - 593WB - 900LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640313  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5609LSFL40D2W1E - 593WB - 900LM - 2700K  
Description: ML56 RR, 40D TIR OPTIC, 5" WHITE BAFFLE TRIM  
Light Source: (1) D2W SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1140.7 lumens  
Efficiency: N/A  
Efficacy: 96.7 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 11.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640313

CATALOG NUMBER: ML5609LSFL40D2W1E - 593WB - 900LM - 2700K

### Luminous Intensity Polar Plot

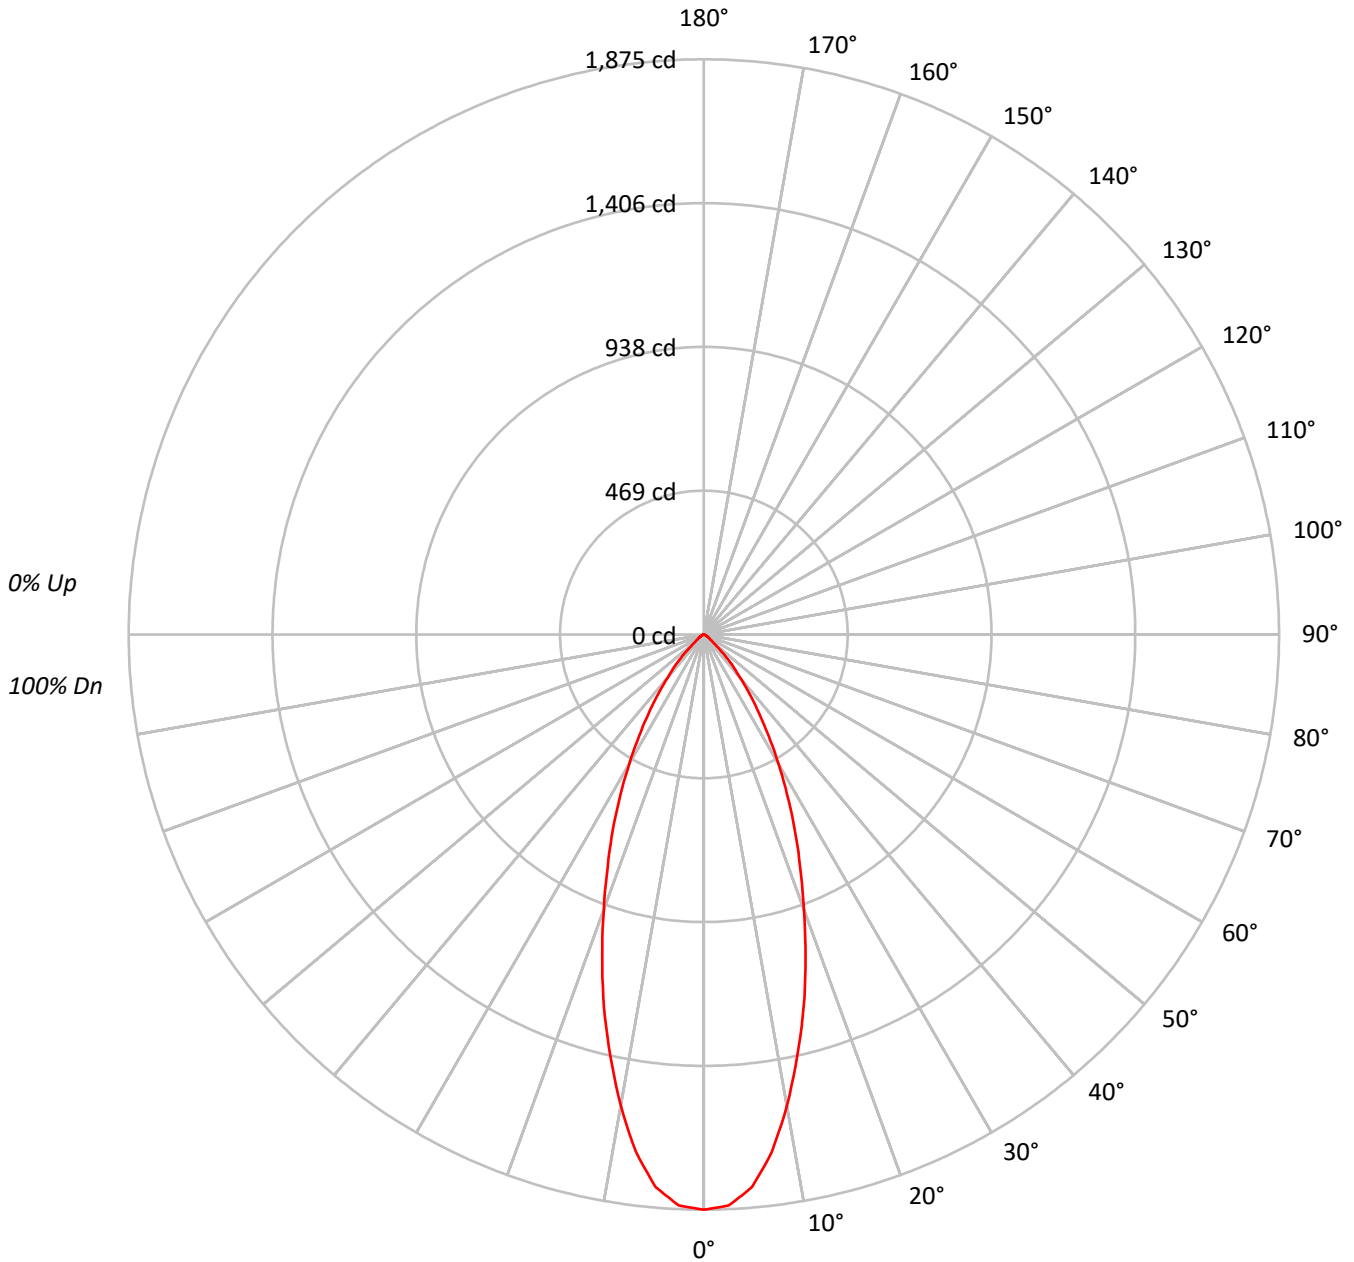



TEST NUMBER: P640313

CATALOG NUMBER: ML5609LSFL40D2W1E - 593WB - 900LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	82	79	83	80	78	76																			
5	93	85	79	75	92	84	79	75	82	78	74	81	77	73	79	76	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	85	76	70	66	83	75	69	66	74	69	65	73	68	65	71	67	64	63																			
8	81	72	66	62	80	71	66	62	70	65	61	69	64	61	68	64	61	60																			
9	77	68	62	58	76	67	62	58	66	62	58	66	61	58	65	61	58	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	148014
5°	143247
10°	125016
15°	102754
20°	80059
25°	61058
30°	44218
35°	30192
40°	18838
45°	11209
50°	4446
55°	2904
60°	2068
65°	1308
70°	1154
75°	1220
80°	1364
85°	1811

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11209 cd/sqm



TEST NUMBER: P640313

CATALOG NUMBER: ML5609LSFL40D2W1E - 593WB - 900LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	164.4	14.4
10°-20°	347.1	30.4
20°-30°	320.8	28.1
30°-40°	198.3	17.4
40°-50°	76.9	6.7
50°-60°	19.8	1.7
60°-70°	7.6	0.7
70°-80°	4.0	0.3
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	832.4	73.0
0°-40°	1030.7	90.4
0°-60°	1127.3	98.8
0°-90°	1140.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1140.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1875	
5°	1808	164
15°	1257	347
25°	701	321
35°	313	198
45°	100	77
55°	21	20
65°	7	8
75°	4	4
85°	2	2
90°	0	



TEST NUMBER: P640313

CATALOG NUMBER: ML5609LSFL40D2W1E - 593WB - 900LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1875.0
2.5°	1862.9
5°	1807.7
7.5°	1700.2
10°	1559.6
12.5°	1407.0
15°	1257.3
17.5°	1101.7
20°	953.0
22.5°	819.5
25°	701.0
27.5°	587.5
30°	485.1
32.5°	392.7
35°	313.3
37.5°	246.0
40°	182.8
42.5°	139.6
45°	100.4
47.5°	56.2
50°	36.2
52.5°	27.1
55°	21.1
57.5°	16.1
60°	13.1
62.5°	10.0
65°	7.0
67.5°	5.0
70°	5.0
72.5°	4.0
75°	4.0
77.5°	3.0
80°	3.0
82.5°	2.0
85°	2.0
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)