

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640368

Luminaire Tested: ML5609LSNFL25D2W1E - 596WB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640368
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5609LSNFL25D2W1E - 596WB - 900LM - 3000K
Description: ML56 RR, 25D TIR OPTIC, 5" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) D2W SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1160.8 lumens
Efficiency: N/A
Efficacy: 98.4 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 11.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640368
CATALOG NUMBER: ML5609LSNFL25D2W1E - 596WB - 900LM - 3000K

Luminous Intensity Polar Plot

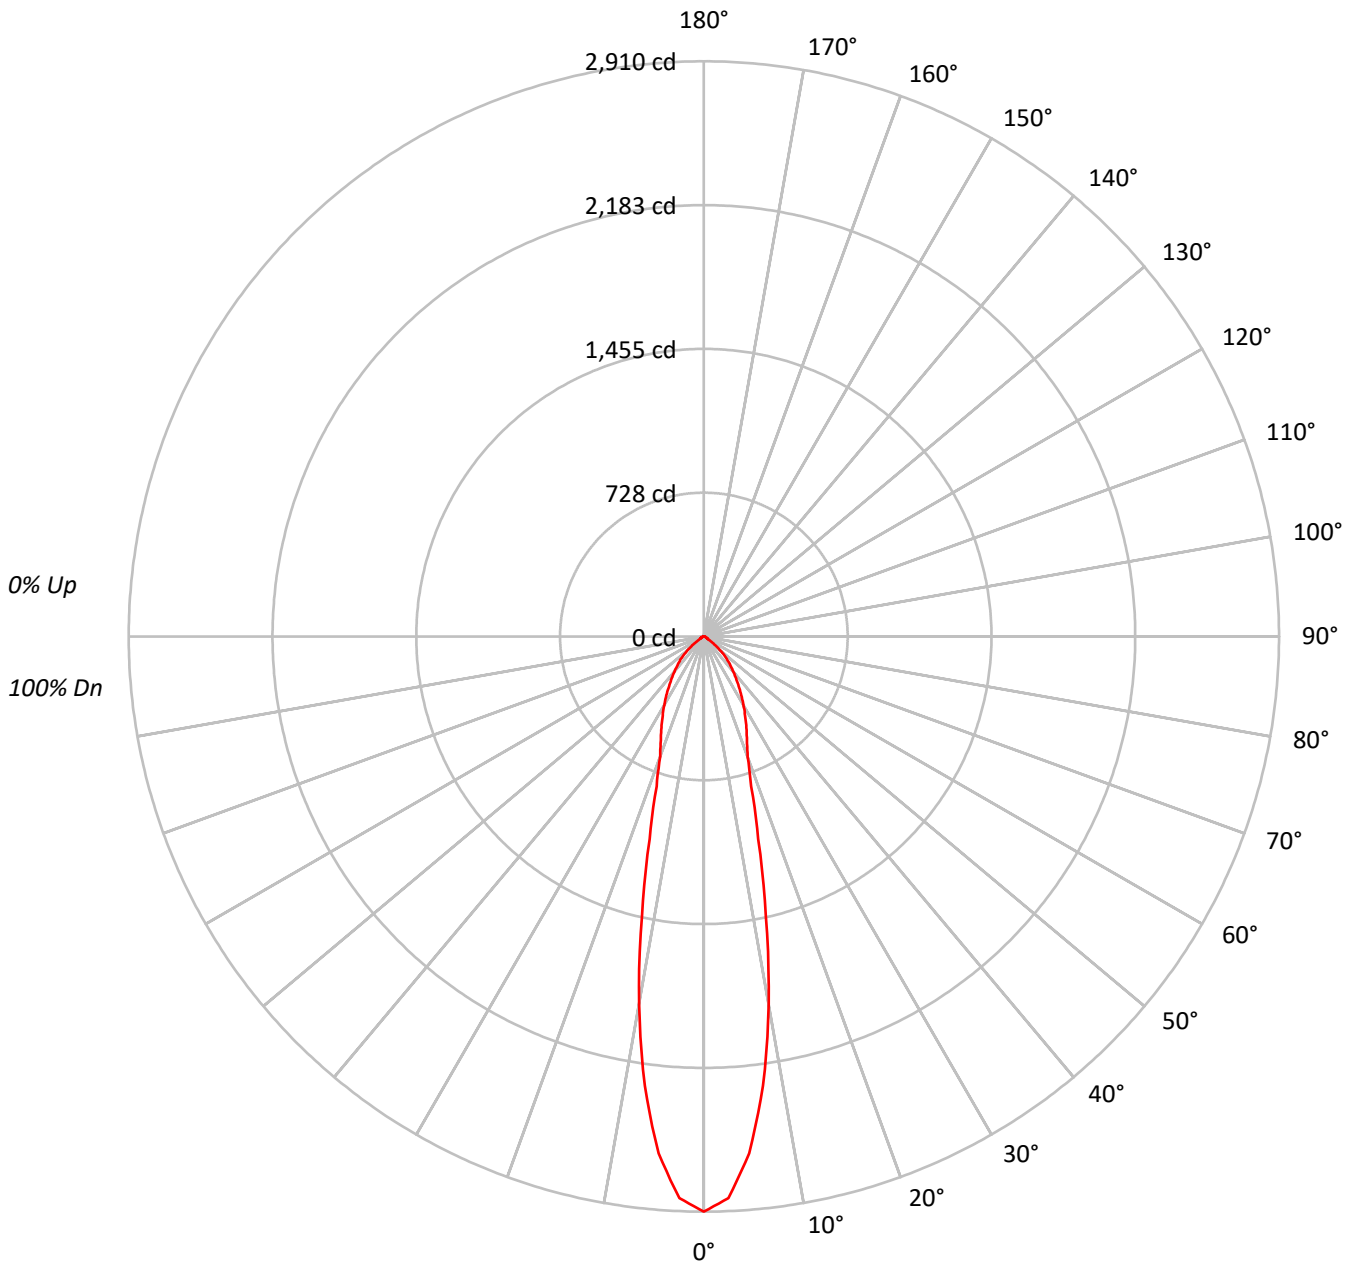



TEST NUMBER: P640368

CATALOG NUMBER: ML5609LSNFL25D2W1E - 596WB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			80																
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75			75																
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70			70																
6	88	79	73	69	86	78	72	68	76	72	68	75	71	67	74	70	67	65			65																
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			62																
8	80	71	65	61	79	70	64	60	69	64	60	68	63	60	67	63	60	58			58																
9	76	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	229702
5°	208027
10°	151492
15°	86784
20°	54252
25°	44326
30°	36562
35°	29614
40°	23774
45°	18901
50°	12711
55°	5780
60°	3237
65°	3026
70°	2493
75°	2288
80°	2455
85°	2898

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18901 cd/sqm



TEST NUMBER: P640368

CATALOG NUMBER: ML5609LSNFL25D2W1E - 596WB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.8	19.5
10°-20°	305.8	26.3
20°-30°	234.2	20.2
30°-40°	193.0	16.6
40°-50°	129.2	11.1
50°-60°	44.8	3.9
60°-70°	15.6	1.3
70°-80°	8.4	0.7
80°-90°	3.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	766.8	66.1
0°-40°	959.8	82.7
0°-60°	1133.8	97.7
0°-90°	1160.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1160.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2910	
5°	2625	227
15°	1062	306
25°	509	234
35°	307	193
45°	169	129
55°	42	45
65°	16	16
75°	8	8
85°	3	3
90°	0	



TEST NUMBER: P640368

CATALOG NUMBER: ML5609LSNFL25D2W1E - 596WB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2909.8
2.5°	2844.0
5°	2625.2
7.5°	2293.1
10°	1889.9
12.5°	1449.0
15°	1061.9
17.5°	794.6
20°	645.8
22.5°	568.2
25°	508.9
27.5°	451.7
30°	401.1
32.5°	352.5
35°	307.3
37.5°	266.3
40°	230.7
42.5°	198.4
45°	169.3
47.5°	139.1
50°	103.5
52.5°	73.3
55°	42.0
57.5°	25.9
60°	20.5
62.5°	18.3
65°	16.2
67.5°	12.9
70°	10.8
72.5°	8.6
75°	7.5
77.5°	7.5
80°	5.4
82.5°	4.3
85°	3.2
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)