

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640400

Luminaire Tested: ML5609LSVWFL75D2W1E - 593BB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640400
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-75)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5609LSVWFL75D2W1E - 593BB - 900LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 5" BLACK BAFFLE TRIM
Light Source: (1) D2W SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1106.9 lumens
Efficiency: N/A
Efficacy: 93.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 11.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640400

CATALOG NUMBER: ML5609LSVWFL75D2W1E - 593BB - 900LM - 3000K

Luminous Intensity Polar Plot

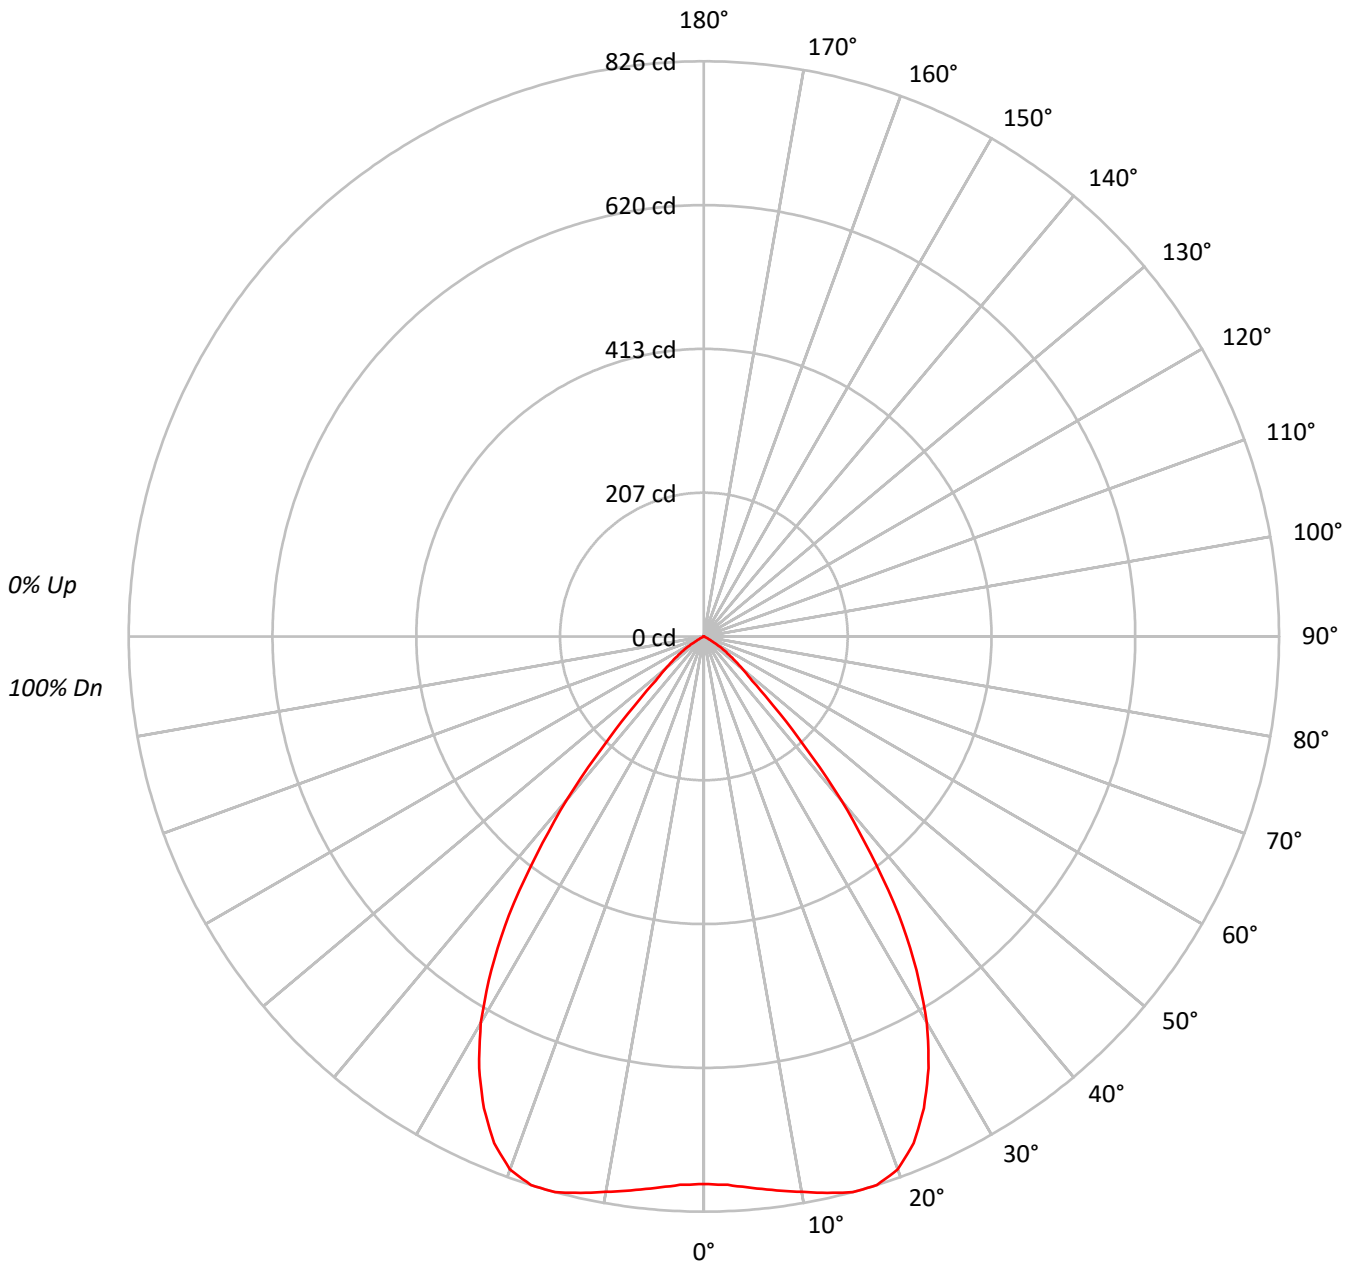



TEST NUMBER: P640400

CATALOG NUMBER: ML5609LSVWFL75D2W1E - 593BB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92			92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85			85
3	101	94	88	84	99	92	87	83	90	85	82	87	83	81	85	82	79	78			78
4	95	87	80	76	93	85	80	75	83	78	74	81	77	74	79	76	73	71			71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	67	74	70	67	65			65
6	84	74	68	63	83	74	67	63	72	66	62	70	66	62	69	65	61	60			60
7	79	69	63	58	78	68	62	58	67	62	57	66	61	57	65	60	57	55			55
8	75	64	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51			51
9	71	60	54	49	70	60	54	49	59	53	49	58	53	49	57	52	49	47			47
10	67	56	50	46	66	56	50	46	55	50	46	54	49	46	54	49	45	44			44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62063
5°	62982
10°	64921
15°	67514
20°	68399
25°	65100
30°	58393
35°	47076
40°	31564
45°	15775
50°	8879
55°	5340
60°	1879
65°	205
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15775 cd/sqm



TEST NUMBER: P640400

CATALOG NUMBER: ML5609LSVWFL75D2W1E - 593BB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.4	6.9
10°-20°	232.8	21.0
20°-30°	340.3	30.7
30°-40°	298.0	26.9
40°-50°	121.0	10.9
50°-60°	35.3	3.2
60°-70°	3.3	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	649.4	58.7
0°-40°	947.3	85.6
0°-60°	1103.6	99.7
0°-90°	1106.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1106.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	786	
5°	795	76
15°	826	233
25°	747	340
35°	488	298
45°	141	121
55°	39	35
65°	1	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640400

CATALOG NUMBER: ML5609LSVWFL75D2W1E - 593BB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	786.2
2.5°	788.3
5°	794.8
7.5°	802.4
10°	809.9
12.5°	818.5
15°	826.1
17.5°	826.1
20°	814.2
22.5°	787.3
25°	747.4
27.5°	698.8
30°	640.6
32.5°	568.3
35°	488.5
37.5°	393.6
40°	306.3
42.5°	213.5
45°	141.3
47.5°	93.8
50°	72.3
52.5°	53.9
55°	38.8
57.5°	24.8
60°	11.9
62.5°	6.5
65°	1.1
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)